
CITY OF ALBUQUERQUE
NEW MEXICO
DEPARTMENT OF
MUNICIPAL DEVELOPMENT

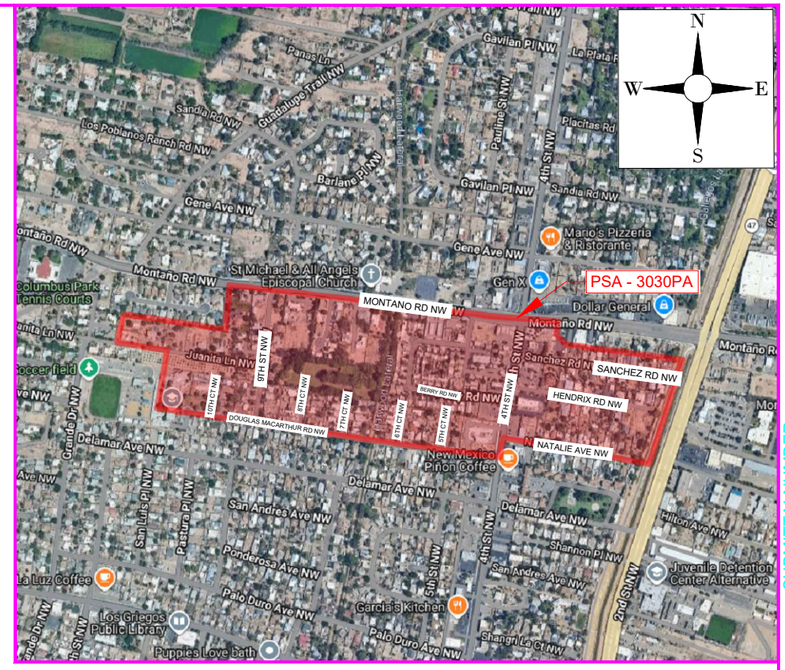

VICINITY MAP

ZONE ATLAS MAP
F14, F15

DATE: 07/29/26
PROJECT NAME: GIGAPOWER WORK ORDER NO.
PROJECT LIMIT DESCRIPTION
MONTANO RD NW, SANCHEZ RD NW, 9TH ST NW, BERRY RD NW, HENDRIX RD NW, 8TH CT NW, 10TH CT NW, 4TH ST NW, DOUGLAS MACARTHUR RD NW, 7TH CT NW, 6TH CT NW, 5TH CT NW, NATALIE AVE NW.

ALL BORING AND EXCAVATION MUST CONFORM WITH THE REQUIREMENTS OF THE NEW MEXICO PUBLIC REGULATION COMMISSION (PRC) PIPELINE SAFETY BUREAU, AND WITH THE LATEST EDITION OF THEIR EXCAVATION HANDBOOK. BY NEW MEXICO STATUTE, SAID AGENCY HAS JURISDICTION TO ENFORCE THESE REQUIREMENTS.

APPROVAL OF WORK WITHIN AMAFCA ROW/EASEMENT

PROJECT NUMBER

811
CALL NM ONE-CALL SYSTEM SEVEN (7) DAYS PRIOR TO ANY EXCAVATION

ENGINEER STAMP & SIGNATURE	APPROVALS	ENGINEER	DATE	
	DRC CHAIRPERSON			APPROVED FOR CONSTRUCTION
	TRANSPORTATION			
	WATER/WASTEWATER			
	HYDROLOGY			
	PARKS			
	CONST. MGMT.			CITY ENGINEER DATE
	CONST. COORD.			
	CITY PROJECT NO.			SHEET COVERSHEET

SUBMITTAL NUMBER
PROJECT LIMITS
PROJECT NUMBER
PROJECT NAME
GIGAPOWER

INDEX TO SHEETS

SHEET	TITLE
C-1	COVER SHEET
PN-1 - PN-5	PROJECT NOTES
L-1	LEGEND & SCOPE OF WORK
SC-1 - SC-5	SCHEMATIC DIAGRAM
PFP-1 & PFP-1A	PFP DETAILS
PP-1 - PP-8	PROJECT PLAN VIEW
DT-1 - DT-5	PROJECT TYPICALS

PROJECT CONTACTS

GIGAPOWER:

MIGUEL PRIETO
(DESIGN ENGINEER)
505-520-8420
miguel.prieto@gigapower.com

BORMANIS KRISTI
Network Construction Manager - Permits
kristi.bormanis@gigapower.com

CHAD GUINN
(NETWORK CONSTRUCTION LEAD)
505-681-3373
chad.guinn@gigapower.com

JOHN MELENDREZ
(OPERATIONS LEAD)
575-639-0121
john.melendrez@gigapower.com

TECHSERV:

Ryan Smock
Director of Telecom Services
502-777-1295
rsmock@techserv.com

MUNICIPALITIES:

CITY OF ALBUQUERQUE
600 SECOND ST NW
ALBUQUERQUE, NM 87102
505-924-3320

Martin Carrasco, P.E.
DMD-Construction coordination Section
mcarrasco@cabq.gov
505-924-3672


Anthony Montoya, P.E.
Senior Construction Engineer
Building and Development Services
amontoya@cabq.gov
505-924-3314.

David E. Bishop, P.E.
Principal Engineer
Building and Development Services
Plaza Del Sol 600 2nd Street NW
Albuquerque, NM 87102
505-924-3421
dbishop@cabq.gov

UNDERGROUND CONSTRUCTION IN THIS AREA [PFP-1, PP-1, PP-2, PP-3, PP-4, PP-5, PP-6, PP-7, PP-8]

S 308 SANCHEZ RD NW
LAT: 35.137755
LONG: -106.640412

AREA OF CONSTRUCTION

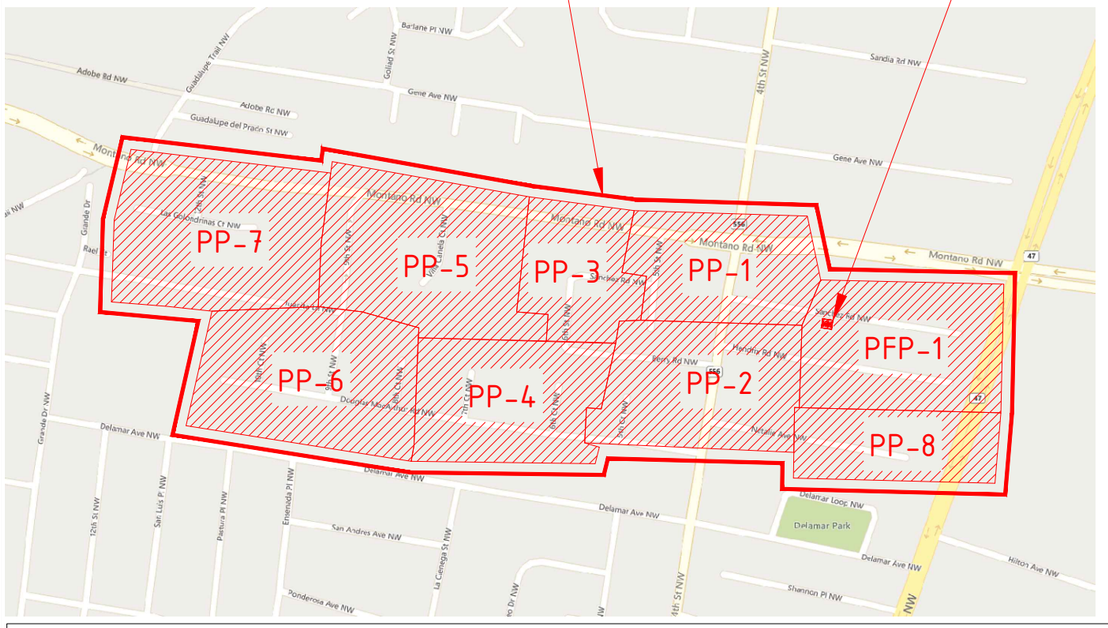
PP-7
PP-5
PP-3
PP-1
PP-6
PP-4
PP-2
PFP-1
PP-8
Montano Rd NW
Montano Rd NW
Montano Rd NW

PROJECT NOTES

AS PER THE CITY OF ALBUQUERQUE DRC:

1. PAINTED SURFACES WITHIN THE BIKE LANE IS TO BE RESTORED AS PER THE CABQ, PAINT SPECIFICATIONS TO BE PROVIDED BY THE CABQ AS NEEDED.
2. ANY DAMAGED WATER OR SANITARY SEWER INFRASTRUCTURE, INCLUDING SERVICES, SHALL BE REPLACED IN KIND, COPPER WATER SERVICES MAY NOT BE SPLICED BUT MUST BE REPLACED FROM THE MAIN TO THE METER BOX, AS PER THE WATER AUTHORITY.
3. AVOID DETECTOR LOOPS IF POSSIBLE, ANY DAMAGED DETECTOR LOOP SHALL BE REPLACED IN KIND AT THE DIRECTION OF CABQ TRAFFIC OPERATIONS PH. 505-857-8035
4. REFERENCE CABQ DETAILS FOR RESTORATION
   A. CABQ #2415A FOR CURB AND GUTTER
   B. CABQ #2420 FOR VALLEY GUTTERS
   C. CABQ #2430 FOR SIDEWALKS

ALL WORK DETAILED ON THESE PLANS, EXCEPT AS OTHERWISE STATED OR PROVIDED HEREON, SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE CITY OF ALBUQUERQUE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, 2020 EDITION THROUGH UPDATE# 1, REFERRED TO HEREIN AS "STANDARD SPECIFICATIONS."

CONTRACTOR NOTES:

- CONTRACTOR SHALL PROMPTLY CLEAN UP ANY MATERIAL EXCAVATED TO PREVENT THE EXCAVATED MATERIAL FROM BEING WASHED DOWN THE STREET AND / OR INTO A DRAINAGE FACILITY.
- ALL SURFACES, INCLUDING LANDSCAPED AREAS, TO BE RESTORED TO ORIGINAL CONDITION AND BACKFILLED TO ORIGINAL SPECIFICATIONS.
- ADVANCED NOTIFICATION OF RESIDENTS AND BUSINESSES AFFECTED BY CONSTRUCTION, IN COMPLIANCE WITH SPECIFICATION §6.5.2.24, SHALL BE THE RESPONSIBILITY OF THE OWNER (INTERNET SERVICE PROVIDER).
- CONTRACTOR SHALL VERIFY WITH OWNER THAT **ADVANCE NOTIFICATION** HAS OCCURRED BEFORE CONSTRUCTION IN EACH RELEVANT WORK AREA.
- PARTICULAR ATTENTION TO THE FOLLOWING CITY SPECIFICATIONS SECTIONS SHALL BE PAID: 6.11, 6.14, 17.1, 18.5, 701.4, 701.8, AND 1200.5.

- CONTRACTOR MUST OBTAIN LOCATES PRIOR TO DISTURBING THE GROUND.
- CONTRACTOR MUST HAVE A COPY OF THE APPROVED PERMIT AND CITY STAMPED CONSTRUCTION DRAWINGS FROM THE APPROPRIATE AGENCY ON THE JOB SITE AT ALL TIMES.
- ANY LANDSCAPING WILL BE REPLACED TO EQUAL OR BETTER THAN THAT WHICH EXISTED PRIOR TO WORK RESTORED.
- THE PROJECT SITE WILL BE PROPERLY SECURED PRIOR TO THE END OF EACH DAY.

ALL WORK IS TO BE IN ACCORDANCE WITH ALL AUTHORITIES HAVING JURISDICTION IN THE WORK ZONE.

- CONTRACTORS ARE ADVISED TO CONTACT TECHSERV/GIGAPOWER FOR ANY ADDITIONAL INFORMATION OR CLARIFICATION CONCERNING SCOPE OF WORK OR THE REQUIREMENTS NECESSARY FOR PROJECT COMPLETION.
- CONTRACTOR IS RESPONSIBLE TO FIELD VERIFY ALL DIMENSIONS, QUANTITIES AND EXISTING CONDITIONS PRIOR TO CONSTRUCTION. IF A SIGNIFICANT CHANGE TO THE RUNNING LINE IS NEEDED, PLEASE CONTACT YOUR TECHSERV/GIGAPOWER REPRESENTATIVE BEFORE PROCEEDING.
- BEFORE CONSTRUCTION BEGINS, CONTRACTOR SHALL TAKE APPROPRIATE PRECAUTIONS TO AVOID ANY POTENTIAL OBSTRUCTIONS PRIOR TO PROCEEDING WITH WORK.
- NO CONSTRUCTION ON PRIVATE PROPERTY WILL COMMENCE UNTIL APPROVAL IS GIVEN BY THE APPROPRIATE TECHSERV/GIGAPOWER EMPLOYEE.
- CONTRACTOR SHALL NOT PROCEED WITH WORK UNTIL THEY HAVE RECEIVED A PURCHASE ORDER AND HAVE BEEN DIRECTED TO DO SO BY AN AUTHORIZED TECHSERV/GIGAPOWER REPRESENTATIVE.
- CONTRACTOR SHALL NOT EXCEED THE PURCHASE ORDER VALUE WITHOUT PRIOR AUTHORIZATION IN WRITING FROM THE APPROPRIATE TECHSERV/GIGAPOWER REPRESENTATIVE.
- AS-BUILTS WILL BE REQUIRED FOR EACH PROJECT INCLUDING CABLE FOOTAGE SEQUENTIALS AT EVERY ACCESS POINT, SLACK LOOP, SPLICE LOCATION, POLE AND TERMINATION POINT. CONTRACTOR SHOULD ALSO PROVIDE NOTES OF ALL CHANGED IN DEPTHS, RUNNING LINES, MH/HH LOCATIONS, AND ANY OTHER APPLICABLE NOTES TO DEPICT THE WORK THAT TOOK PLACE. NOTE: ALL MAJOR CHANGES NEED TO BE PRE-APPROVED BY AN AUTHORIZED TECHSERV/GIGAPOWER EMPLOYEE PRIOR TO STARTING THE WORK.

GENERAL NOTES:

1. ALL WORK REGARDING PUBLIC WATER AND PUBLIC SANITARY SEWER INFRASTRUCTURE DETAILED ON THESE PLANS TO BE PERFORMED UNDER THIS CONTRACT SHALL, EXCEPT AS OTHERWISE STATED OR PROVIDED HEREON, BE CONSTRUCTED IN ACCORDANCE WITH WATER AUTHORITY STANDARD SPECIFICATIONS. PLANS SHALL FOLLOW THE MOST CURRENT UPDATE WHICH CAN BE FOUND ONLINE AT Water_Authority_Standard_Specifications_and_Drawings_Feb_2021.pdf
2. ALL UTILITIES AND UTILITY SERVICE LINES SHALL BE INSTALLED PRIOR TO PAVING. EXISTING VALVES AND MANHOLES SHALL NOT BE BURIED OR PAVED OVER BUT RIMS SHALL BE ADJUSTED TO MATCH NEW GRADE PER COA STANDARD DRAWINGS 2460 AND 2461.
3. MANHOLE RIMS, FIRE HYDRANT ELEVATIONS, AND FLANGE ELEVATIONS SHOWN ARE APPROXIMATE. CONTRACTOR SHALL FIELD VERIFY AND ADJUST TO FINAL PAVEMENT OR SURFACE GRADES.
4. ALL FINAL BACKFILL FOR TRENCHES SHALL BE COMPACTED TO A MINIMUM OF 95% MAXIMUM DENSITY PER ASTM D-1557 AND AS DIRECTED BY STANDARD SPECIFICATIONS SECTION 701.14.2 AND STANDARD DRAWING NUMBER 2465.
5. ELECTRONIC MARKER SPHERES (EMS) WILL BE PLACED ACCORDING TO THE ABCWUA STANDARDS AND SPECIFICATIONS. THE CONTRACTOR SHALL INSTALL A 4" X 4" X5' POST AND EMS AT THE END OF EACH SANITARY SEWER SERVICE.
6. TRACER WIRE, INCLUDING TEST STATIONS SHALL BE INCLUDED FOR ALL PUBLIC WATER, SEWER MAINS AND WATER SERVICES IN ACCORDANCE WITH WATER AUTHORITY DETAILS DWG 2190 AND DWG 2191.
7. AT UTILITY CROSSINGS, WHERE LESS THAN 18" OF VERTICAL SEPARATION FROM STORM DRAIN PIPING OR STRUCTURES IS PROPOSED, LEAN FILL CONSTRUCTION (PER SECTION 207 OF THE STANDARD SPECIFICATIONS) SHALL BE USED TO PROTECT THE WATER OR SEWER LINE. LEAN FILL SHALL EXTEND A PERPENDICULAR DISTANCE OF 5 FEET ON EACH SIDE OF THE STORM PIPE OR STRUCTURE.
8. ALL DESIGNS AND CONSTRUCTION OF ANY UNDERGROUND UTILITIES SHALL COMPLY WITH ADMINISTRATIVE INSTRUCTION NO. 9 FOR WORK NEARBY OR AFFECTING SAN JUAN CHAMA TRANSMISSION LINES AND APPURTENANCES. INFORMATION SHALL BE PROVIDED TO THE WATER AUTHORITY ONE (1) MONTH IN ADVANCE OF THE CONSTRUCTION START DATE. INFORMATION CAN BE FOUND AT WUA_Admin_Inst_9_Permit-Proposed-Update-6-5-2023.pdf
9. ALL WATER AND SANITARY SEWER INFRASTRUCTURE SHALL BE CONSTRUCTED UTILIZING MATERIALS LISTED IN THE APPROVED PRODUCTS LIST AND BE CONSTRUCTED PER THE MOST CURRENT WATER AUTHORITY STANDARD DETAILS AND SPECIFICATIONS. MATERIAL SUBMITTALS SHALL BE PROVIDED PRIOR TO CONSTRUCTION FOR THE WATER AUTHORITY ENGINEER TO REVIEW PRIOR TO THE START OF CONSTRUCTION. SEE THE ABCWUA APPROVED PRODUCTS LIST Approved-Products-List-April-2021-Signed.pdf
10. CONTRACTOR SHALL COMPLY WITH NEW MEXICO ONE-CALL LAW. IF AN UNDERGROUND FACILITY IS DAMAGED DURING CONSTRUCTION, STOP CONSTRUCTION, CALL 911 (IF APPROPRIATE), NOTIFY THE UNDERGROUND FACILITY OPERATOR (UFO) IMMEDIATELY, AND CALL 811 TO REPORT THE DAMAGE. DAMAGE MAY INCLUDE NICKS, DENTS, GOUGES, CUTS, SCRAPES OR SCRATCHES TO THE COATING, INSULATING JACKET, OR TRACER WIRE. FOR ABCWUA WATER AND SANITARY SEWER INFRASTRUCTURE, ALL EMERGENCY RESPONSES ARE INITIATED BY A CALL TO DISPATCH AT842-9287. NOTE THAT THERE ARE SPECIFIC RESPONSE AND DOCUMENTATION REQUIREMENTS SHOULD A SANITARY SEWER FACILITY BE DAMAGED THAT RESULTS IN A SANITARY SEWER OVERFLOW (SSO).
11. THE MINIMUM BURIAL DEPTH INDICATED ON THE PLANS IS A LIMIT STATE AND NOT TO BE USED FOR GENERAL CONSTRUCTION. PIPING SHALL BE INSTALLED BASED ON THE ELEVATIONS SPECIFIED.
12. FOR WORK AROUND MAJOR TRANSMISSION LINES ESPECIALLY CONCRETE CYLINDER OR CRITICAL INTERCEPTOR SEWER: RESTRICT COMPACTION EQUIPMENT TO 10-TON NON-VIBRATORY ROLLER MAXIMUM, IF DEPTH OF COVER FROM TOP OF PIPE TO SURFACE IS LESS THAN 4 FEET WITHIN 10 FEET EACH SIDE OF THE CONCRETE CYLINDER PIPES, THEN THIS WILL REQUIRE VIBRATION MONITORING AND POTHOLING NECESSARY TO ENSURE CONSTRUCTION ACTIVITIES DOES NOT DAMAGE THE CONCRETE CYLINDER WATER LINE. ANY DAMAGE TO THE ABCWUA WATERLINES SHALL BE REPAIRED OR REPLACED AT THE EXPENSE OF THE CONTRACTOR. CONSTRUCTION ACTIVITY WILL NEED TO OCCUR AFTER SEPTEMBER 30TH DUE TO WATER TRANSMISSION LINE MORATORIUM. CONTACT JOE CHACON AT 505-289-3533 TO OBTAIN AN EMERGENCY SHUTOFF PLAN. CONSTRUCTION SCHEDULE WILL REQUIRE WATER AUTHORITY STANDBY INSPECTION DURING CONSTRUCTION ACTIVITY.
13. ASBESTOS DISPOSAL IS SOLELY THE RESPONSIBILITY OF THE CONTRACTOR. ALL ASBESTOS CONTAINING WASTE MUST BE DEPOSITED AT A WASTE DISPOSAL SITE THAT IS OPERATED IN ACCORDANCE WITH 40 CFR 61.154. CALL THE SOLID WASTE BUREAU AT 505-827-0197 OR THE ASBESTOS HOTLINE FOR CURRENT INFORMATION REGARDING WHICH LANDFILLS ARE ALLOWED TO ACCEPT ASBESTOS. THE SOLID WASTE BUREAU ALSO ADMINISTERS REGULATIONS PERTAINING TO ASBESTOS DISPOSAL. ALL CONTRACTORS WHO REMOVE ASBESTOS MATERIALS MUST BE LICENSED BY THE NEW MEXICO CONSTRUCTION INDUSTRIES DIVISION, WHICH CAN BE CALLED AT (505) 476-4700.

WATER :

14. THE CONTRACTOR SHALL COORDINATE WITH THE WATER AUTHORITY SEVEN (7) DAYS IN ADVANCE OF PERFORMING WORK THAT WILL AFFECT THE PUBLIC WATER OR SANITARY SEWER INFRASTRUCTURE. WORK REQUIRING SHUTOFF OF FACILITIES DESIGNATED AS MASTER PLAN FACILITIES MUST BE COORDINATED WITH THE WATER AUTHORITY 14 DAYS IN ADVANCE OF PERFORMING SUCH WORK. ONLY WATER AUTHORITY CREWS ARE AUTHORIZED TO OPERATE PUBLIC VALVES. SHUTOFF REQUESTS MUST BE MADE ONLINE AT INFO FOR BUSINESS – WATER SHUT-OFF AND TURN ON PROCEDURES – ALBUQUERQUE BERNALILLO COUNTY WATER UTILITY AUTHORITY
15. NON-RESIDENTIAL USERS SHALL COORDINATE WITH THE WATER AUTHORITY PRETREATMENT ENGINEER (PRETREATMENT@ABCWUA.ORG OR (505)289-3419) FOR INSPECTION TO ENSURE THE COMPLIANCE WITH THE INDUSTRIAL PRETREATMENT PROGRAM. METERED SERVICE AND INPLACE SEWER DISCHARGE PERMITS WILL ONLY BE ISSUED UPON APPROVED INSTALLATION OF THE REQUIREMENTS.
16. NON-RESIDENTIAL USERS SHALL COORDINATE WITH THE WATER AUTHORITY CROSS CONNECTION SECTION(BACKFLOW@ABCWUA.ORG OR 505-289-3454) TO ENSURE THE PROPER IMPROVEMENTS ARE IN PLACE TO ENSURE THAT PROPER BACKFLOW CONTAINMENT IS IN PLACE FOR THE WATER SYSTEM.
17. PROPOSED WATERLINE MATERIALS SHALL BE PVC PIPE MEETING AWWA C-900: DR18 REQUIREMENTS (6" – 12") OR DUCTILE IRON PIPE MEETING AWWA C-150 REQUIREMENTS (6" –48"), SEE THE ABCWUA APPROVED PRODUCTS LIST APPROVED-PRODUCTS-LIST-APRIL-2021-SIGNED.PDF FOR A COMPREHENSIVE LIST OF MATERIALS AND MANUFACTURERS.
18. ALL WATERLINE FITTINGS, VALVES, BENDS, TEES, CROSSES AND APPURTENANCES SHALL HAVE RESTRAINED JOINTS UNLESS OTHERWISE NOTED ON THE PLANS. THE JOINT RESTRAINT REQUIREMENTS SHOULD BE DELINEATED WITHIN A JOINT RESTRAINT TABLE.
19. CONTRACTOR SHALL PROVIDE THE PROPOSED HYDROSTATIC TEST PLANS CONFORMING WITH AWWA C600 TO THE WUA INSPECTORS FOR APPROVAL PRIOR TO BEGINNING TESTING OPERATIONS. DISINFECTION AND VERIFICATION TEST PLAN CONFORMING WITH AWWA 651 WILL BE REQUIRED CONCURRENTLY.
20. FOR CONSTRUCTION WATER FROM FIRE HYDRANTS, THE CONTRACTOR SHALL OBTAIN A FIRE HYDRANT PERMIT AND METER FROM WATER

OWNER:

GIGAPOWER

CONTRACTOR:

TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
PROJECT NOTES

SCALE:
N.T.S.

REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

nm811 Know what's below. Call before you dig.

CURRENT SHEET:
PN-1

PROJECT NOTES

AUTHORITY CUSTOMER SERVICE. THE CONTRACTOR SHALL BE REQUIRED TO COMPLY WITH THE CONDITIONS OF SERVICE AND WILL BE CHARGED A BASE FEE PLUS WATER CONSUMPTION EACH MONTH. THE CONTRACTOR IS NOT PERMITTED TO UTILIZE FIRE HYDRANTS WITHOUT A PERMIT, AN APPROVED WATER AUTHORITY METER, AND AN APPROVED BACKFLOW PREVENTION METHOD. THE PERMIT APPLICATION IS LOCATED AT THIS WEBSITE:https://www.abcwua.org/customer-service-fire-hydrant-meter-program/ELECTRONIC

SANITARY SEWER :

21. ALL SANITARY SEWER LINE STATIONING REFERS TO SANITARY SEWER CENTERLINE STATIONING. EXCEPT WHEN PROFILED WITHIN A PROPOSED OR EXISTING STREET, WHERE STREET STATIONING SHALL GOVERN.
22. ALL PROPOSED SANITARY SEWER SLOPES SHALL BE VERIFIED DURING CONSTRUCTION TO MEET THE APPROVED DESIGN. AS-BUILT SLOPES SHALL BE RECORDED FOR EACH LINE SEGMENT.
23. IT WILL BE THE CONTRACTOR'S SOLE RESPONSIBILITY TO PROTECT AND MAINTAIN, IN SERVICE, ALL EXISTING UTILITIES. THE CONTRACTOR SHALL ADEQUATELY SUPPORT AND PROTECT EXISTING UTILITIES AFFECTED BY THE CONTRACTOR'S TRENCHING ACTIVITY. IN THE EVENT THAT EXISTING UTILITIES ARE DAMAGED BY THE CONTRACTOR'S OPERATIONS, THE CONTRACTOR SHALL ARRANGE FOR AND COORDINATE PROMPT REPAIR BY THE RESPECTIVE UTILITY AND SHALL BEAR THE COST OF THE REPAIRS.
24. AIR TESTING OF SEWER LINES AND HYDROSTATIC TESTING OF FORCE MAINS SHALL BE CONDUCTED IN THE PRESENCE OF THE ABCWUA'S INSPECTOR. ALL COSTS FOR THESE REQUIREMENTS ARE CONSIDERED AS INCLUDED IN THE SANITARY SEWER LINE PIPE ITEMS AND NO ADDITIONAL MEASUREMENT OR PAYMENT WILL BE MADE THEREFOR.
25. ALL SEWER SERVICE LINES SHALL BE INSPECTED BY CAMERA WITH OPERATOR CERTIFIED IN NASSCO PACP. THE CCTV WILL BE PROVIDED TO THE CITY'S INSPECTOR FOR REVIEW BEFORE ACCEPTANCE BY THE ABCWUA. THE CCTV INSPECTIONS SHALL MEET NASSCO PACP STANDARDS. INSPECTIONS SHALL UTILIZE ITPIPES SOFTWARE AND INCLUDE THE VIDEO, REPORT, SNAPSHOTS AND MICROSOFT ACCESS FILE.
26. THIRTY (30) DAYS FOLLOWING INSTALLATION AND BACKFILL OF SEWER LINES, A DEFLECTION TEST USING A HAND PULLED MANDREL SHALL BE PERFORMED IN THE PRESENCE OF THE ABCWUA'S INSPECTOR PER STANDARD SPECIFICATION 901.5.2.4.
27. THE CONTRACTOR SHALL MARK THE TOP OF THE CURB AND PAN OF THE GUTTER WITH "S" FOR SANITARY
28. ALL WORK WITHIN THE PUBLIC RIGHT-OF-WAY OR ABCWUA PUBLIC EASEMENTS MUST BE DONE BY A UTILITY CONTRACTOR WITH A GF-9 OR GF-98 LICENSE. ANY WORK PERFORMED ON PRIVATELY OWNED SEWER LINE AND/OR SERVICE LINES MUST BE INSPECTED BY THE CITY OF ALBUQUERQUE'S CODE ADMINISTRATION DIVISION OR BERNALILLO CODE ADMINISTRATION PRIOR TO BACKFILLING AND/ OR PAVING. THE CITY OF ALBUQUERQUE WILL REQUIRE THE UTILITY CONTRACTOR'S PLUMBING SECTION (THOSE WITH A M SERIES LICENSE) SUBMIT FOR A BUILDING PERMIT TO HAVE THE PRIVATE SEWER LINE AND/OR SERVICE LINE INSPECTED. BERNALILLO CODE ADMINISTRATION HAS A SIMILAR PROCESS.

REPLACEMENT RATIO FOR DAMAGED TREES IS 1:1, MEANING THAT IF A 10" DBH TREE IS DAMAGED BEYOND REPAIR, THE CONTRACTOR SHALL REPLACE WITH TWO 5' X 2" CALIPER TREES TO MAKE UP FOR THE LOSS IN CALIPER SIZE. NO TREE ROOTS LARGER THAN 2" DIAMETER SHALL BE CUT. TREE ROOTS SHALL BE CUT CLEANLY.

TRANSPORTATION:

33. ANY STREET STRIPING ALTERED OR DESTROYED SHALL BE REPLACED WITH THERMO-PLASTIC REFLECTORIZED PAVEMENT MARKING BY CONTRACTOR TO THE SAME LOCATION AS EXISTING OR AS INDICATED BY THIS PLAN SET.
34. REMOVAL OF EXISTING CURB & GUTTER AND SIDEWALKS SHALL BE TO THE NEAREST JOINT.
35. OVERNIGHT PARKING OF CONSTRUCTION EQUIPMENT SHALL NOT OBSTRUCT DRIVEWAYS OR DESIGNATED TRAFFIC LANES. THE CONTRACTOR SHALL NOT STORE ANY EQUIPMENT OR MATERIAL WITHIN THE PUBLIC RIGHT-OF-WAY.
36. CURB AND GUTTER, SIDEWALKS, AND DRIVE PADS SHALL MATCH THE LINE AND GRADE OF ABUTTING EXISTING AREAS AS SHOWN ON THE PLANS OR AS DIRECTED BY THE PROJECT ENGINEER.
37. THE SUBGRADE PREP SHALL EXTEND ONE FOOT BEYOND THE FREE EDGE OF NEW CURB AND GUTTER AND SIDEWALK.
38. CONTRACTOR TO TEST SUBGRADE R-VALUE PRIOR TO CONSTRUCTION. IN THE EVENT THE R-VALUE IS LESS THAN 50, REMOVE 2 FEET OF SUBGRADE MATERIAL AND IMPORT MATERIAL WITH R-VALUE GREATER THAN 50 OR CONTACT THE ENGINEER IMMEDIATELY SO THE PAVEMENT SECTION CAN BE MODIFIED.
39. AT ALL PAVEMENT REMOVAL AND REPLACEMENTS, SAW-CUT EDGES SHALL BE STRAIGHT AND CLEAN, AND LONGITUDINAL JOINTS SHALL NOT BE PLACED WITHIN WHEEL PATHS. PATCHES SHALL BE REGULAR AND SQUARE OR RECTANGULAR, WITH FOUR STRAIGHT SIDES. FINISHED PAVEMENT SURFACE SHALL BE FLUSH WITH EXISTING PAVEMENT SURFACE, WITH NO SPILLOVER OF ASPHALT OR TACK COAT. CARE MUST BE TAKEN TO AVOID DAMAGING THE INTEGRITY OR APPEARANCE OF SURROUNDING PAVEMENTS. IF DAMAGED, THE ENTIRE SURFACE PATCH MUST BE EXPANDED TO COVER DAMAGES.
40. CONTRACTOR WILL ENSURE THE ASPHALT HAS A SMOOTH, UNIFORM EDGE WHEN REMOVING AND REPLACING CURB AND GUTTER. IF THE ASPHALT EDGE IS NOT SMOOTH AND UNIFORM, CONTRACTOR WILL SAW CUT AND REPLACE A ONE-FOOT STRIP OF ASPHALT ALONG THE FULL SECTION BEING REPLACED; REFER TO C.O.A. STANDARD DRAWING # 2465 WITH THE APPROPRIATE PAVING SECTION BASED ON ROADWAY CLASSIFICATION.

HYDROLOGY:

41. ALL STORM DRAINS SHALL BE RCP CLASS III UNLESS OTHERWISE NOTED ON THE PLANS.
42. RCP SHALL BE INSTALLED SO THAT THE JOINT GAP AT THE HOME POSITION SHALL CONFORM TO THE APPROVED MANUFACTURER'S RECOMMENDATION. MANUFACTURER'S RECOMMENDED JOINT GAP TOLERANCES FOR EACH PIPE SIZE AND TYPE SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PRIOR TO PLACEMENT OF PIPE. RCP JOINTS SHALL NOT BE GROUTED UNLESS DIRECTED BY THE ENGINEER AND WITH CITY APPROVAL.

OTHER COMMON NOTES:

43. ALL EXCAVATION, TRENCHING, AND SHORING ACTIVITIES MUST BE ACCOMPLISHED IN ACCORDANCE WITH OSHA 29CFR 1926.650 SUBPART P.
44. WHEN DISTURBING MORE THAN ¾ ACRES,CONTRACTOR SHALL SECURE A "TOPSOIL DISTURBANCE PERMIT" PRIOR TO BEGINNING CONSTRUCTION.
45. IN ADVANCE OF CONSTRUCTION, CONTRACTOR SHALL DETERMINE IF OVERHEAD UTILITY LINES, SUPPORT STRUCTURES, POLES, GUYS, ETC. ARE AN OBSTRUCTION TO CONSTRUCTION OPERATIONS. IF ANY OBSTRUCTION TO CONSTRUCTION OPERATIONS IS EVIDENT, CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING WITH THE APPROPRIATE UTILITY OWNER TO REMOVE OR SUPPORT THE UTILITY OBSTRUCTION. ANY COST ASSOCIATED WITH THIS EFFORT SHALL BE THE RESPONSIBILITY OF CONTRACTOR.
46. PNM WILL PROVIDE AT NO COST TO THE CITY OR THE CONTRACTOR THE REQUIRED PERSONNEL FOR INSPECTION OR OBSERVATION DEEMED NECESSARY BY PNM WHILE THE CONTRACTOR IS EXPOSING PNM'S CABLES. HOWEVER, THE CONTRACTOR SHALL BE CHARGED THE TOTAL COST ASSOCIATED WITH REPAIRS TO ANY DAMAGED CABLES OR FOR ANY COST ASSOCIATED WITH SUPPORTING OR RELOCATING THE POLES AND CABLES DURING CONSTRUCTION.
47. CONTRACTOR SHALL SUPPORT AND PROTECT ALL EXISTING, UNDERGROUND UTILITY LINES WHICH BECOME EXPOSED DURING CONSTRUCTION. PAYMENT FOR SUPPORTING WORK SHALL BE INCIDENTAL TO WATERLINE AND/OR SEWER LINE COSTS.
48. CONTRACTOR IS TO SUPPORT, PROTECT, AND MAINTAIN THE INTEGRITY OF ALL UNDERGROUND TELEPHONE, ELECTRIC CABLES AND CABLE TELEVISION UTILITIES AT NO ADDITIONAL COST TO THE OWNER. CABLE IS TO BE SUPPORTED AT A MAXIMUM SPACING OF FIFTEEN (15) FEET. CONTRACTOR SHALL COORDINATE WITH AND MAKE NECESSARY PAYMENT (IF ANY) TO UTILITY OWNER FOR DE-ENERGIZATION OF CABLES OR SUPPORT OF CABLES BY THE UTILITY OWNER.
49. CONTRACTOR SHALL PROMPTLY CLEAN UP ANY MATERIAL EXCAVATED WITHIN THE PUBLIC RIGHT-OF-WAY OR PRIVATE ROADWAY EASEMENTS TO PREVENT ANY EXCAVATED MATERIAL BEING WASHED DOWN THE STREET OR INTO ANY PUBLIC DRAINAGE FACILITY.
50. CONTRACTOR SHALL CONDUCT ALL WORK IN A MANNER WHICH WILL MINIMIZE INTERFERENCE WITH LOCAL TRAFFIC.
51. ALL EXISTING SIGNS, MARKERS, DELINEATORS, ETC., WITHIN THE CONSTRUCTION LIMITS SHALL BE REMOVED, STORED AND RE-SET BY THE CONTRACTOR.
52. DISPOSAL SITE FOR ALL EXCESS EXCAVATION MATERIAL AND UNSUITABLE MATERIAL SHALL BE ARRANGED BY THE CONTRACTOR IN COMPLIANCE WITH ALL APPLICABLE ENVIRONMENTAL REGULATIONS. NO SEPARATE MEASUREMENT OR PAYMENT WILL BE MADE FOR COSTS ASSOCIATED WITH OBTAINING A DISPOSAL SITE AND HAUL THERETO.
53. IF CULTURAL RESOURCES, SUCH AS HISTORIC OR PREHISTORIC ARTIFACTS, OR HUMAN REMAINS ARE DISCOVERED DURING EXCAVATION OR CONSTRUCTION, WORK SHALL CEASE AND THE CONSTRUCTION ENGINEER SHALL NOTIFY THE COUNTY OFFICE OF THE MEDICAL EXAMINER AT (505) 272-3053. IF THE MEDICAL EXAMINER DETERMINES THAT HUMAN REMAINS ARE NOT PRESENT, THE CONSTRUCTION ENGINEER SHALL NOTIFY THE STATE HISTORIC PRESERVATION OFFICER (SHPO) AT 827-6320.
54. IF DISTURBING PCC PAVEMENT FOR ART LANES: CONTRACTOR SHALL CONTACT ABQ TRANSIT DEPARTMENT AT LEAST TWO WEEKS PRIOR TO DISTURBING THE PCC PAVEMENT ASSOCIATED WITH THE ART LANES. CONTACT INFO: ROLANDO SUAREZ, PH. 505.205.3444 (RSUAREZ@CABQ.GOV) OR SHAUN GIBSON, PH. 505.250.5269 (SGIBSON@CABQ.GOV).

GENERAL NOTES USED SELECTIVELY, BASED ON SCOPE OF WORK:

55. WORK AFFECTING ARTERIAL ROADWAYS MAY REQUIRE TWENTY-FOUR- HOUR CONSTRUCTION.
56. TWO WEEKS PRIOR TO CONSTRUCTION, THE CONTRACTOR SHOULD NOTIFY THE TRANSIT DEPARTMENT OF ANY IMPACT THE PROPOSED PROJECT WILL HAVE ON THE TRANSIT SYSTEM SUCH AS CAUSING A DETOUR, OR CAUSE THE CLOSING OR RELOCATION OF A BUS STOP. THE CONTACT PERSON IS DOUGLAS GOFF, OFFICE PHONE 505-724-3137, CELL PHONE 505-206-0151, AND E-MAIL DGOFF@CABQ.GOV.
57. STREET NAME SIGNS, REGULATORY SIGNAGE, AND ANY NECESSARY STRIPING ON PRIVATE STREETS ARE THE DEVELOPER'S RESPONSIBILITY.
58. IN ALL AREAS WHERE PUBLIC STREETS OR INFRASTRUCTURE ARE TO BE CONSTRUCTED OVER FILLS, THE GEOTECHNICAL ENGINEER SHALL CERTIFY THAT PLACEMENT, COMPACTION, AND ALL OTHER WORK HAS BEEN COMPLETED IN ACCORDANCE WITH COA SPECIFICATION SECTION 204 SAID CERTIFICATION, ALONG WITH SUPPORTING TESTING DOCUMENTATION, SHALL BE PROVIDED TO THE CONSTRUCTION ENGINEER PRIOR TO OR AT THE PRE-CONSTRUCTION CONFERENCE BEFORE WORK ORDER CONSTRUCTION.

PARKS AND RECREATION:

59. ANY IMPACTS TO EXISTING MULTI-USE TRAILS SHOULD BE AVOIDED. IF IMPACTS ARE UNAVOIDABLE, COORDINATE WITH COA PARKS AND RECREATION. CONTACT ROBERT FRIEDRICHS BY TELEPHONE (505.857 8650), AND EMAIL CHERYL SOMERFELDT (csomerfeldt@CABQ.gov), AT LEAST TWO FULL BUSINESS DAYS PRIOR TO ANY DISTURBANCE.
60. IRRIGATION SYSTEMS AND LANDSCAPING PROTECTION REQUIRED. BORE AT 36 UNDER GRADE TO AVOID DISTURBING INFRASTRUCTURE.

OWNER:

GIGAPOWER

CONTRACTOR:

TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
PROJECT NOTES

SCALE:
N.T.S.

REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

nm811 Know what's below. Call before you dig.

CURRENT SHEET:
PN-2

PROJECT NOTES

AMAFCA GENERAL CONSTRUCTION NOTES:

61. AMAFCA'S PROJECT MANAGER SHALL BE NOTIFIED AT LEAST 48 HOURS PRIOR TO ANY CONCRETE INSTALLATION TO ALLOW FOR INSPECTION OF THE REBAR AND SUBSURFACE PREPARATION.
62. AMAFCA'S PROJECT MANAGER SHALL BE NOTIFIED BY EMAIL AT LICENSING@AMAFCA.ORG OR BY PHONE AT (505) 884-2215 AT LEAST TEN (10) DAYS PRIOR TO REQUEST FOR FINAL INSPECTION OF THE WORK WITHIN THE AMAFCA RIGHT-OF-WAY OR EASEMENT.
63. NO WORK WILL BE PERFORMED IN THE AMAFCA RIGHT-OF-WAY OR EASEMENT BETWEEN MAY 15 AND OCTOBER 15 WITHOUT PRIOR WRITTEN AUTHORIZATION FROM AMAFCA.
64. ALL SUBGRADE, BACKFILL, AND EMBANKMENT SHALL BE COMPACTED TO 95% (+2% OF OPTIMUM MOISTURE PER ASTM D-1557) WITHIN THE AMAFCA RIGHT-OF-WAY OR EASEMENT, TESTING REPORTS SHALL BE PROVIDED TO AMAFCA AT THE FINAL INSPECTION.
65. CERTIFIED AS-BUILT PLANS SHALL BE SUBMITTED TO AMAFCA FOR ANY CONSTRUCTION WITHIN THE AMAFCA RIGHT-OF-WAY OR EASEMENT BEFORE FINAL WRITTEN ACCEPTANCE OR ACKNOWLEDGEMENT OF THE PROJECT.
66. ALL DISTURBED GROUND AREAS SHALL BE REVEGETATED IN ACCORDANCE WITH CITY OF ALBUQUERQUE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, SECTION 1012 NATIVE GRASS SEEDING, AS CURRENTLY UPDATED.
67. ANY EXISTING SURVEY CONTROL MONUMENTS THAT ARE DISTURBED OR DAMAGED AS A RESULT OF THE CONSTRUCTION OR MAINTENANCE ACTIVITIES, SHALL BE REPLACED BY A LICENSED SURVEYOR IN NEW MEXICO AT THE LICENSEE'S EXPENSE. AMAFCA SHALL BE NOTIFIED AT LEAST TWO DAYS (48 HOURS) PRIOR TO ANY MONUMENT PLACEMENT.
68. THE LICENSEE AND/OR THEIR CONTRACTOR SHALL MAINTAIN OR REPAIR ALL AMAFCA INFRASTRUCTURE INCLUDING BUT NOT LIMITED TO FENCING, GATES, SIGNAGE, AND ALL OTHER FACILITIES. ALL REPAIRS WILL BE PERFORMED TO RETURN FACILITIES TO ORIGINAL OR AMAFCA-APPROVED CONDITION.
69. THE MAXIMUM WHEEL LOAD ALLOWED IN THE AMAFCA CHANNEL SHALL BE TWELVE THOUSAND (12,000) POUNDS.
70. NO TRACKED VEHICLES WILL BE ALLOWED IN AMAFCA HARD-LINED OR CONCRETE CHANNEL WITHOUT WRITTEN PERMISSION FROM AMAFCA.
71. CRANES OPERATING WITH OUTRIGGERS IN THE CHANNEL SHALL LIMIT THE OUTRIGGER FOOTPRINT LOAD AREA TO LESS THAN TWELVE THOUSAND (12,000) POUNDS
72. DUST SUPPRESSION SHALL BE MAINTAINED SEVEN (7) DAYS A WEEK DURING CONSTRUCTION ACTIVITY. DURING PERIODS OF CONSTRUCTION INACTIVITY, THE CONTRACTOR SHALL BE REQUIRED TO MAINTAIN DUST CONTROL MEASURES.
73. THE LICENSEE AND/OR THEIR CONTRACTOR SHALL BE RESPONSIBLE TO PROVIDE TRACK-OUT REDUCTION MEASURES AND CLEAN UP ANY TRACK-OUT OF MATERIAL THE CONTRACTOR SHALL CLEAN UP ANY SOIL DEPOSITS OR SPILLS ON ALL PAVED ROADS ALONG HAUL ROUTES.
74. THE LICENSEE AND/OR THEIR CONTRACTOR ARE RESPONSIBLE FOR ALL TRAFFIC AND PEDESTRIAN CONTROL.
75. AT THE END OF EACH WORKDAY AND DURING TIMES OF CONSTRUCTION INACTIVITY, THE CONTRACTOR SHALL ENSURE ALL ACCESS GATES TO THE FACILITY ARE CLOSED AND LOCKED. THE LICENSEE AND/OR THEIR CONTRACTOR SHALL BE RESPONSIBLE FOR ALL TRASH AND DEBRIS REMOVAL IN THE AREA OF THE CONSTRUCTION ACTIVITY. ALL GRAFFITI WILL BE REMOVED OR APPROPRIATELY COVERED UP WITHIN ONE DAY (24 HOURS).
76. ANY FINES IMPOSED AGAINST AMAFCA DUE TO THE CONTRACTORS ACTIVITIES THAT VIOLATE THE CONDITIONS OF ANY REQUIRED FUGITIVE OR AMAFCA'S PROGRAMMATIC DUST PERMIT SHALL BE REIMBURSED BY THE LICENSEE AND/OR THEIR CONTRACTOR.
77. ANY FINES LEVIED AGAINST THE CONTRACTOR DUE TO ITS ACTIVITIES THAT VIOLATE ANY LOCAL STATUTES OR REQUIREMENTS SHALL BE PAID BY THE LICENSEE AND/OR THEIR CONTRACTOR.
78. IF AMAFCA IS FINED AS BEING THE LANDOWNER OF THE PROPERTY, DUE TO THE CONTRACTOR'S ACTIVITIES, THE CONTRACTOR OR THE LICENSEE SHALL REIMBURSE AMAFCA FOR ALL COSTS ASSOCIATED WITH PAYMENT OF THE FINE BY AMAFCA.
79. AT THE SUBSTANTIAL COMPLETION OF THE PROJECT, THE LICENSEE'S CONTRACTOR SHALL RESTORE TO CONDITIONS AS BEFORE CONSTRUCTION OR IMPROVE TO AMAFCA'S REQUIREMENT THE MAINTENANCE ACCESS ROADS IMPACTED BY THE PROJECT INCLUDING ALL NECESSARY GRADING AND TOP DRESSING OF THE ROAD BASE OR GRAVEL MATERIAL AT THE DIRECTION OF AUTHORIZED AMAFCA PERSONNEL ANY CONCRETE, ASPHALT OR OTHER DEBRIS FOUND WITHIN THE CONSTRUCTION AREA WILL BE TRANSPORTED OFF SITE AND APPROPRIATELY DISPOSED OF BY THE LICENSEE'S CONTRACTOR AT NO COST TO AMAFCA.

AMAFCA TEMPORARY CONSTRUCTION AND ACCESS:

80. THE CONTRACTOR SHALL SUBMIT A STORMWATER POLLUTION PREVENTION PLAN (SWPPP) FOR APPROVAL BY AMAFCA BEFORE THE NOTICE OF INTENT (NOI) IS SUBMITTED TO EPA, IF AND ONLY IF, THE CONTRACTOR IS USING ANY AMAFCA FACILITY AS A BEST MANAGEMENT PRACTICE (BMP) OR IF A BMP WILL INHIBIT THE FUNCTION OF AN AMAFCA FACILITY.
81. THE CONTRACTOR SHALL IMPLEMENT AN EROSION AND SEDIMENT CONTROL PROGRAM TO MINIMIZE SEDIMENT ENTERING AMAFCA'S FACILITIES.
82. THE CONTRACTOR SHALL PROVIDE SWPPP INSPECTION AND ENFORCEMENT OF CONTROL MEASURES DURING CONSTRUCTION. COPIES OF ALL THE SWPPP INSPECTION REPORTS WILL BE SUBMITTED TO AMAFCA AS PART OF THE FINAL INSPECTION.
83. ANY FINES LEVIED AGAINST CONTRACTOR DUE TO ANY ACTIVITIES THAT VIOLATE CONDITIONS OF THE AMAFCA MS4 PERMIT NMRO4A000 SHALL BE PAID BY THE CONTRACTOR AND/OR THE LICENSEE.
84. IF AMAFCA IS FINED AS OWNER, DUE TO THE CONTRACTOR'S ACTIVITIES, THE LICENSEE AND/OR THEIR CONTRACTOR SHALL REIMBURSE AMAFCA FOR ALL COSTS ASSOCIATED WITH PAYMENT OF THE FINE BY AMAFCA

THESE CONDITIONS ARE INCLUDED AND ARE MADE A PART OF THIS AGREEMENT BY A MUTUAL UNDERSTANDING OF BOTH PARTIES.

GENERAL NOTES FOR TRAFFIC COMMUNICATION INFRASTRUCTURE/FIBER OPTIC LINES:

85. CITY-OWNED FIBER OPTIC COMMUNICATION CABLES MAY BE PRESENT IN ARTERIAL AND COLLECTOR STREETS. CONTACT COA TRAFFIC OPERATIONS (505-857-8035) OR (505-250-2604) AT LEAST 48 HOURS PRIOR TO BORING OR TRENCHING OPERATIONS IN THESE AREAS. ANY AND ALL DAMAGE TO CITY TRAFFIC OPERATIONS INFRASTRUCTURE AS A RESULT OF CONTRACTOR'S ACTIVITIES MUST BE REPAIRED OR REPLACED AT THE CONTRACTOR'S EXPENSE IN ACCORDANCE WITH TRAFFIC OPERATIONS PROCEDURES. IF THE TRAFFIC UTILITY IS DAMAGED DURING THE PROJECT, THE UTILITY WILL NEED TO BE REPLACED FROM FULL SPLICE TO FULL SPLICE; NO INTERMEDIATE SPLICES ARE ALLOWED. 86. ADDITIONAL FIBER OPTIC SPLICES ARE NOT ALLOWED. IF CONSTRUCTION OPERATIONS REQUIRE RELOCATION OF FIBER OPTIC, AND IF SUFFICIENT SLACK IS NOT AVAILABLE, THE CABLE(S) MUST BE REPLACED AND RE-PULLED FROM THE NEXT ADJACENT SPLICE VAULTS. 87. TRAFFIC OPERATIONS MUST BE ON SITE WHEN EXPOSING FIBER OPTIC CONDUITS.

WATER AUTHORITY:

88. AS PER ALBUQUERQUE BERNALILLO COUNTY WATER UTILITY AUTHORITY COMPLIANCE CODE, THE FOLLOWING NOTES ARE REQUIRED: THE CONTRACTOR SHALL COORDINATE WITH THE WATER AUTHORITY SEVEN (7) DAYS IN ADVANCE OF PERFORMING WORK THAT WILL AFFECT THE PUBLIC WATER OR SANITARY SEWER INFRASTRUCTURE. WORK REQUIRING SHUTOFF OF FACILITIES DESIGNATED AS MASTER PLAN FACILITIES MUST BE COORDINATED WITH THE WATER AUTHORITY 14 DAYS IN ADVANCE OF PERFORMING SUCH WORK. ONLY WATER AUTHORITY CREWS ARE AUTHORIZED TO OPERATE PUBLIC VALVES. SHUTOFF REQUESTS MUST BE MADE ONLINE AT HTTP://ABCWUA.ORG/ WATER_SHUT_OFF_AND_TURN_ON_PROCEDURES.ASPX.
89. ALL DESIGNS AND CONSTRUCTION OF ANY UNDERGROUND UTILITIES SHALL COMPLY WITH ADMINISTRATIVE INSTRUCTION NO. 9 FOR WORK NEARBY OR AFFECTING SAN JUAN CHAMA TRANSMISSION LINES AND APPURTENANCES. INFORMATION SHALL BE PROVIDED TO WATER AUTHORITY ONE (1) MONTH IN ADVANCE OF THE CONSTRUCTION START DATE. INFORMATION CAN BE FOUND AT HTTP://ABCWUA.ORG/ WATER_SHUT_OFF_AND_TURN_ON_PROCEDURES.ASPX
90. CONTRACTOR SHALL COMPLY WITH NEW MEXICO ONE CALL LAW. IF AN UNDERGROUND FACILITY IS DAMAGED DURING CONSTRUCTION, STOP CONSTRUCTION, CALL 911 (IF APPROPRIATE). NOTIFY THE UNDERGROUND FACILITY OPERATOR [UFO], IMMEDIATELY, AND CALL 811 TO REPORT THE DAMAGE. DAMAGE MAY INCLUDE NICKS, DENTS, GOUGES, CUTS, SCRAPES OR SCRATCHES TO THE COATING, INSULATING JACKET, OR TRACER WIRE FOR ABCWUA WATER AND SANITARY SEWER INFRASTRUCTURE, ALL EMERGENCY RESPONSES ARE INITIATED BY A CALL TO DISPATCH AT (505) 842-9287. NOTE THAT THERE ARE SPECIFIC RESPONSE AND DOCUMENTATION REQUIREMENTS SHOULD A SANITARY SEWER FACILITY BE DAMAGED THAT RESULTS IN A SANITARY SEWER OVERFLOW (SSO).

TRAFFIC CONTROL:

-- ANY PROJECT INVOLVING WORK ALONG A MAJOR ARTERIAL ROAD AND/OR HEAVY TRAFFIC VOLUME SHOULD BE ANTICIPATED.
-- UNIFORM TRAFFIC FLOW SHALL BE MAINTAINED AT ALL TIMES. ONLY EQUIPMENT AND MATERIALS NECESSARY FOR IMMEDIATELY SCHEDULED OR IN-PROGRESS WILL BE MAINTAINED IN THE WORK AREA ALL OTHER EQUIPMENT AND MATERIALS WILL BE STORED OR STOCKPILED" IN SUCH A MANNER AS TO ELIMINATE HAZARDOUS CONDITIONS FOR TRAFFIC OR PEDESTRIANS DURING NON-WORKING OR SHUT DOWN PERIOD.
-- TRAFFIC WARNING DEVICES AND SIGNS SHALL CONFORM TO THE MANUAL ON UNIFORM TRAFFIC DEVICES FOR STREETS AND HIGHWAYS (US GOVERNMENT PRINTING OFFICE) AND TO THE STATE HIGHWAY DIVISION STANDARDS SPECIFICATIONS FOR HIGHWAY CONSTRUCTION, HIGH LEVEL WARNING TYPE DEVICES ARE TO BE USED AT TIMES AND SPECIAL WARNING DEVICES MAY BE STIPULATED BY THE JURISDICTIONAL PERMIT AGENCY AT ANY TIME THE USE WILL ADD TO THE SAFETY AND PROTECTION OF TRAFFIC OR PEDESTRIANS IN THE CONSTRUCTION AREA.
-- ALL CONDUIT TRENCHING IN PAVED AREAS SHALL BE BACKFILLED WITH CRUSHED GRAVEL OR COMPLETELY COVERED AT THE COMPLETION OF EACH WORKING DAY. ANY BACKFILLED TRENCH SHALL BE CAPPED WITH A MINIMUM LAYER OF ASPHALT OR CONCRETE COLD PATCH AT THE END OF EACH WORKING DAY.
-- THE CONTRACTOR SHALL MARK THE CONDUIT TRENCH AND DEFINE THEIR CONSTRUCTION AREA CLEARLY WITH BARRICADES, CONES, AND/OR OTHER VISIBLE METHODS THAT ALERT THE PUBLIC TO THE CONSTRUCTION ACTIVITY.
-- A TRAFFIC CONTROL PLAN SHALL BE PREPARED BY THE CONTRACTOR AS REQUIRED AND SUBMITTED TO EACH PERMITTING AGENCY REQUESTING SUCH PLAN FOR REVIEW AND APPROVAL OR REVISION PRIOR TO COMMENCING ANY CONSTRUCTION ACTIVITY FOR THIS PROJECT. THE APPROVED PLAN SHALL BE SUBMITTED TO THE AGENCY AND A COPY OF THE PLAN SHALL BE KEPT AT THE CONSTRUCTION SITE AND MUST BE AVAILABLE FOR REVIEW BY AGENCY REPRESENTATIVES.
-- THE CONTRACTOR SHALL PROVIDE ALL SHORING AND DESIGN CALCULATIONS TO THE PERMIT ISSUING AGENCY PRIOR TO COMMENCING ANY CONSTRUCTION ACTIVITY.

OWNER:

GIGAPOWER

CONTRACTOR:

TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
PROJECT NOTES

SCALE:
N.T.S.

REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

nm811 Know what's below. Call before you dig.

CURRENT SHEET:
PN-3

PROJECT NOTES

STRUCTURE PROTECTION:

--MANHOLES AND CONDUIT TO BE PLACED ADJACENT TO EXISTING STRUCTURES SUCH AS BRIDGES, BRIDGE FOOTING/PIERS, FOUNDATIONS, WALLS, POWER AND TELEPHONE POLES, AND OTHER UTILITIES SHALL MAINTAIN A MINIMUM CLEARANCE AS SHOWN. THE CONTRACTOR SHALL NOT UNDERMINE ANY ADJACENT STRUCTURE WITHOUT SPECIFIC WRITTEN PERMISSION FROM THE OWNER/OPERATION OF SUCH STRUCTURE.
--SHORING USED AS FOUNDATION SUPPORT SHALL BE DESIGNED SPECIFICALLY FOR BOTH THE LIVE AND DEAD LOADS OF THE STRUCTURE OR IF ONLY THE DEAD LOAD IS USED FOR DESIGN, THE CONTRACTOR SHALL PROVIDE A DETAILED LAYOUT AND PLAN OF THE METHOD OF ESTABLISHING AND MAINTAINING THE DESIGN LOAD CONDITION (I.E., ROAD DETOURS, TIEBACKS, ETC.).
--SEE UTILITY CLEARANCE SECTION NOTES FOR THE CLEARANCE CRITERIA TO PARALLEL OR CROSS UTILITIES.
--EXISTING UTILITIES EXPOSED DURING EXCAVATION SHALL BE 100% SUPPORTED BY EITHER TRENCH BRIDGING AND SUSPENSION OR BY THE USE OF LONGITUDINAL TRAYS OR PLATFORMS VERTICALLY SUPPORTED BY ADJUSTABLE BUILDING JACKS.
--EXISTING SPLICE CASES AND CABLE SHALL BE SUPPORTED BY SUSPENSION FROM A CROSS BEAM, SUPPORTS SHALL BE PLACED AT A MAXIMUM SPACING OF 4 FEET AND SHALL CONSIST OF A CANVAS SLING WITH NYLON BELTING OR ROPE. ALL CABLE SUPPORT SHALL BE PLACED IN A MANNER THAT PREVENTS KINKS OR OTHER DAMAGE TO THE CABLE SHEATH.
--AN ACCEPTABLE ALTERNATIVE TO CABLE SLINGS WOULD BE THE UTILIZATION OF A WIDE FLANGE 1" BEAM OR CHANNEL AS A "CABLE TRAY" WITH CABLES/CASES BANDED IN PLACE.

HAZARDOUS MATERIAL:

THE CONTRACTOR SHALL NOTIFY THE JURISDICTIONAL PERMIT AGENCY IMMEDIATELY IF ANY MATERIALS ARE ENCOUNTERED THAT ARE CONSIDERED BY THE EPA, DEQ, OR OSHA AS HAZARDOUS. IF POTENTIALLY HAZARDOUS MATERIALS ARE ENCOUNTERED THE CONTRACTOR SHALL SECURE THE SITE AND PREVENT ANY ACCIDENTAL EXPOSURE BY THE PUBLIC OR THE CONTRACTOR'S PERSONNEL.

THE CONTRACTOR MAY EXCAVATE UP TO, BUT SHALL NOT DISTURB KNOWN HAZARDOUS MATERIALS SUCH AS ASBESTOS, OILS, ACID, ETC. THE REMOVAL OF ALL HAZARDOUS MATERIALS MUST BE DONE BY AN APPROVED OR CERTIFIED HAZARDOUS MATERIALS CONTRACTOR LICENSED BY THE STATE.

A COPY OF ALL CORRESPONDENCE PERTINENT TO THE REMOVAL OF THE HAZARDOUS MATERIALS SHALL BE TRANSMITTED TO THE OWNER, AND A COPY SHALL BE AVAILABLE AT THE PROJECT OFFICE AND THE JOB SITE.

AERIAL NOTES:

AERIAL CONSTRUCTION TO BE PERFORMED TO INDUSTRY ACCEPTABLE STANDARDS.

- ALL HEIGHT OF CABLE PLACEMENT WILL BE RECORDED AT THE TIME OF CONSTRUCTION, DOCUMENT ALL POINTS OF ATTACHMENT.
- 6.6M STRAND WILL BE WITH STANDARD 3/8" HARDWARE.
- ALL EXTENSION ARMS WILL BE EPOXY ARMS UNLESS OTHERWISE NOTED OR APPROVED BY THE INSPECTOR.
- BOND STRAND TO POWER MGN WHERE APPLICABLE. ANCHORS TO BE USED WILL BE SCREW IN TYPE 34.
- ALL STRAPS WILL BE PLACED 4" BEFORE AND AFTER EVERY SUPPORTING CLAMP AT MINIMUM OF 21' APART.
- POA POINT OF ATTACHMENT
- ADD MISSING GROUNDS
- REPAIR/REPLACE EXISTING LASHING WIRE IF DAMAGED

SHORING:

--THE CONTRACTOR SHALL PROVIDE SHORING FOR CONDUIT TRENCH EXCAVATION 48" OR MORE IN DEPTH AS MEASURED FROM THE HIGH SIDE OF THE TRENCH AND FOR ALL MANHOLE EXCAVATION.
--MANHOLE SHORING SHALL BE TIGHT-SHEETED.
--ALL SHORING SHALL CONFORM TO THE STANDARDS AND SPECIFICATIONS OF THE LOCAL PARTY AND THE OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION.
--THE CONTRACTOR SHALL PROVIDE ALL SHORING AND DESIGN CALCULATIONS TO THE PERMIT ISSUING AGENCY PRIOR TO COMMENCING ANY CONSTRUCTION ACTIVITY.

CONSTRUCTION STAKES:

--IN AREAS WHERE THE CONDUIT ALIGNMENT IS NOT CLEARLY DEFINED BY THE CURB LINES, FENCE LINES, OR OTHER EVIDENCE OF THE RIGHT-OF-WAY, THE ENGINEER WILL PROVIDE CENTERLINE STAKE OR PAINT MARKS WHERE REQUIRED TO MAKE THE PROPOSED CONDUIT ALIGNMENT EVIDENT.
--CLOSURE IDENTIFIED IN THE PLANS SHALL BE LOCATED BY THE CONTRACTOR. DEVIATION FROM PLAN LAYOUT SHALL BE APPROVED BY THE ENGINEER PRIOR TO CONDUIT AND/OR ENCLOSURE INSTALLATION.
--MANHOLE CENTERS WILL BE FIELD STAKED BY THE ENGINEER WHEN REQUESTED, WITH OFFSET STAKED AT RIGHT ANGLES TO THE CONDUIT ALIGNMENT.
--IF ADDITIONAL FIELD STAKING OF LOCATION OF CONDUIT, MANHOLES, PROPERTY LINES, ETC., BECOMES NECESSARY, THE CONTRACTOR IS TO NOTIFY THE INSPECTOR OR THE ENGINEER 2 DAYS PRIOR TO THE BEGINNING OF WORK.

PERMITS-FRANCHISES-EASEMENTS:

--PHYSICAL WORK SHALL NOT BE STARTED UNTIL THE GOVERNING AGENCY INSPECTOR AND THE CONTRACTOR ARE IN POSSESSION OF AND HAVE CAREFULLY REVIEWED AND FULLY UNDERSTAND ALL CONDITIONS AND SPECIFICATIONS SET FORTH IN THE REQUIRED PERMIT, FRANCHISES AND/OR EASEMENTS.
--PLACING FOREMAN TO HAVE A COPY OF THE PERMITS, EASEMENTS ON SITE AT ALL TIMES.
--ANY CONFLICT BETWEEN WORK PRINT SPECIFICATIONS AND SPECIFICATIONS SET FORTH UNDER RELATED PERMITS, FRANCHISES, AND/OR EASEMENTS MUST BE CLEARED BY PROPER COMPANY AUTHORITY BEFORE PROGRESSING WITH WORK INVOLVED.

SPECIAL UTILITY CLEARANCE:

ALL WORK CONDUCTED ADJACENT TO WATER MAINS SHALL CONFORM TO THE FOLLOWING CONDITIONS.

A. WHENEVER POSSIBLE CONDUIT SHALL MAINTAIN A HORIZONTAL SEPARATION OF 3', MEASURED SURFACE (OUTSIDE EDGE TO OUTSIDE EDGE) FROM PARALLEL WATER MAINS.
B. WHENEVER POSSIBLE CONDUIT SHALL PASS UNDER EXISTING WATER MAINS AND MUST MAINTAIN 12" VERTICAL SEPARATION
C. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ESTABLISHING AND MAINTAINING THIS REQUIRED VERTICAL SEPARATION BY EITHER EXPOSING THE WATER MAIN EVERY 100 FEET IN THESE AREAS WHERE HORIZONTAL SEPARATION IS LESS THAN 3 FEET OR BY UTILIZING THE DEPTHS OF ADJACENT WATER VALVES. IF THE CONTRACTOR UTILIZES THE ADJACENT WATER LINE TO DETERMINE WATER MAIN DEPTH, THEY SHALL CONTACT THE AGENCY AT EACH SUCH LOCATION AND THE AGENCY WILL DETERMINE THE NECESSARY DEPTH OF THE TOP OF THE CONDUIT AT THAT POINT.
D. THE VERTICAL AND HORIZONTAL SEPARATION SHALL BE MAINTAINED AT ALL TIMES UNLESS SPECIFICALLY REVISED BY AGREEMENT BETWEEN THE JURISDICTIONAL PERMIT AGENCY AND THE AGENCY. ANY SPECIFIC DEVIATION IN THE VERTICAL AND HORIZONTAL SEPARATION FROM THOSE DESCRIBED SHALL BE REPORTED TO THE OWNER BY THE CONTRACTOR, THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING VERTICAL AND HORIZONTAL SEPARATION AT ALL TIMES AND SHALL BE RESPONSIBLE FOR ANY AND ALL ENCROACHMENTS.
E. CLEARANCES TO STORM SEWER AND SANITATION SEWERS SHALL BE EXACTLY THE SAME AS THOSE TO WATER MAINS.

SITE CONDITIONS:

THE ACTUAL LOCATION OF EXISTING CONDUIT AND CABLES MAY VARY FROM THE INDICATED LOCATION SHOWN. REPAIR OF ANY DAMAGED CONDUIT CONTAINING CABLE SHALL BE MADE BY USE OF PVC SPLIT DUCT. THE CONTRACTOR SHALL ENCLOSE THE EXISTING CABLES IN PVC.

THE LOCATIONS OF EXISTING UTILITIES SHOWN IN THE PLAN ARE APPROXIMATE WHEN WORK IS TO BE CONDUCTED IN THE VICINITY OF KNOWN UTILITIES, THEIR ACTUAL LOCATION MUST BE FIELD VERIFIED TO AVOID CONFLICTS AND DAMAGE TO THESE UTILITIES. VARIATION IN LOCATIONS BETWEEN "RECORDED POSITIONS" AND ACTUAL POSITIONS SHOULD BE ANTICIPATED.

IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO VERIFY THE LOCATION OF ALL UNDERGROUND UTILITIES, BURIED UTILITIES & THE AREA IN ADDITION TO THOSE SHOWN ON THE PLAN. THE CONTRACTOR SHALL CONTACT PROPERTY OWNERS WHEN WORKING WITHIN PRIVATE EASEMENTS FOR LOCATION OF UNDERGROUND TANKS, PIPELINES, DRAIN TILES, OR OTHER BURIED IMPROVEMENTS. THE CONTRACTOR SHALL ALSO NOTIFY THE UTILITY NOTIFICATION CENTER PRIOR TO COMMENCING ANY CONSTRUCTION ACTIVITIES.

THE CONTRACTOR MUST ASSUME ALL BURIED UTILITIES ENCOUNTERED ARE ALIVE AND ACTIVE UNLESS SPECIFICALLY INSTRUCTED OTHERWISE BY THE OWNERS OR OPERATORS OF SAID UTILITIES.

DAMAGE TO SUB-SURFACE STRUCTURES IS THE SOLE RESPONSIBILITY OF THE PLACING CONTRACTOR THE CONTRACTOR SHALL PROTECT THE EXISTING TRAFFIC CONTROL LOOPS. IF EXISTING TRAFFIC CONTROL LOOPS ARE DAMAGED DURING CONSTRUCTION, THE ENTIRE LOOP WIRE FROM TERMINAL SHALL BE REPLACED IN ACCORDANCE WITH GOVERNING AGENCY STANDARDS AND REGULATIONS AT CONTRACTOR'S EXPENSE.

REMOVAL OF EXISTING ASPHALT PAVEMENT, CONCRETE CURBS, AND CONCRETE SIDEWALKS WILL BE "NEAT LINE" WITH SAW OR PAVEMENT CUTTER, PER REQUIREMENTS AND SPECIFICATIONS OF THE AGENCY OR DEPARTMENT RESPONSIBLE FOR EACH LOCATION.

IF CONCRETE PAVEMENT IS ENCOUNTERED WHILE EXCAVATING CONDUIT TRENCHES, THE CONCRETE REMOVAL WILL BE "NEAT LINE" WITH A PAVEMENT SAW. IF CONCRETE CURB RETURNS AND/OR SIDEWALKS ARE REPLACED DUE TO CONDUIT OR MANHOLE INSTALLATION, THE CONTRACTOR SHALL PLACE APPROVED HANDICAPPED SIDEWALK AND CURB ACCESS RAMPS IN CONFORMANCE WITH STATE STATUTES.

ALL MATERIALS NECESSARY FOR REPAIR OF STREETS, CURBS, SIDEWALKS, SANITARY SEWERS, STORM SEWERS, AND PUBLIC SERVICE UTILITIES, AND THE INSTALLATION OF SUCH MATERIALS SHALL BE IN CONFORMANCE WITH THE REQUIREMENTS AND SPECIFICATIONS OF THE AGENCY OR DEPARTMENT RESPONSIBLE FOR THE OPERATION AND MAINTENANCE OF THE REPAIRED FACILITY.

ALL WORK SHALL CONFORM TO THE SPECIFICATIONS OF THE JURISDICTIONAL PERMIT AGENCY.

ALL OPEN TRENCHES WILL BE CLEARLY MARKED WITH BARRICADES OR CONES. STEEL PLATES OR OTHER TYPES OF BRIDGING SHALL BE PROVIDED TO COVER OPEN TRENCHES IN THE TRAVEL PORTION OF THE STREETS. THESE PLATES OR BRIDGING SHALL BE ADEQUATE TO SUPPORT THE NORMAL VEHICLE LOADS ANTICIPATED IN THIS AREA AND SHALL BE IN PLACE DURING ALL NON-WORKING HOURS.

ALL SURFACES TO BE RESTORED TO ORIGINAL CONDITION, AND BACKFILL TO BE COMPACTED AS SPECIFIED. TRENCH EXCAVATION IN SURFACE WHICH INCLUDE CONCRETE TREATED BASE SHALL FOLLOW LOCAL AREA SPECIFICATIONS.

OWNER:

GIGAPOWER

CONTRACTOR:

TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
PROJECT NOTES

SCALE:
N.T.S.

REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

nm811 Know what's below. Call before you dig.

CURRENT SHEET:
PN-4

PROJECT NOTES

MICRO-TRENCHING:

1. MICRO-TRENCHING SHALL ONLY BE USED TO INSTALL TELECOMMUNICATION CONDUITS
2. MICRO-TRENCHING SHALL NOT BE ALLOWED IN CONCRETE PAVED STREETS, OR IN OTHER CONCRETE INFRASTRUCTURE SUCH AS EXISTING CURBS, GUTTER, CROSS GUTTER, BUS PAD, SIDEWALK, FLOATING CURB EXTENSION, BUS BULB, TRUCK PILLOW, RAISED CROSSWALK, ISLAND, MINI- ROUNDABOUT, OR SIMILAR ELEMENTS IS NOT PERMITTED. CONTRACTOR MAY NEED TO SEEK ALTERNATE METHODS; JACK AND BORE, DIRECTIONAL BORING, TRADITIONAL TRENCHING, OR OTHER METHODS APPROVED BY COA ENGINEER.
3. THE CONTRACTOR SHALL IDENTIFY ALL EXISTING UTILITIES, INCLUDING SERVICE CONNECTIONS IN THE FIELD. THE CONTRACTOR SHALL CONTACT NEW MEXICO ON-CALL SYSTEM AT LEAST 48 HOURS PRIOR TO START OF WORK AT 1-505-266-1990. TO FURTHER SUPPLEMENT THE SERVICES OF NEW MEXICO ONE-CALL, DETERMINE THE EXACT LOCATIONS AND DEPTHS OF ALL UTILITIES USING A MOBILE GROUND-PENETRATING RADAR SYSTEM. THE CONTRACTOR SHALL POTHOLE ALL CROSSING UTILITIES AND PARALLEL UTILITIES WITHIN 18-INCHES OF THE PROPOSED ALIGNMENT TO A DEPTH OF 6-INCHES BELOW THE BOTTOM OF THE MICRO-TRENCH, TO DETERMINE THE EXISTING UTILITY ALIGNMENT AND ELEVATION. POTHOLES SHALL BE IMMEDIATELY BACKFILLED AND COMPACTED IN ACCORDANCE WITH THE SPECIFICATIONS OR RESTORED AS DIRECTED BY THE COA ENGINEER.
4. IF EXISTING UTILITIES ARE DAMAGED, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE INSPECTOR, CABQ ENGINEER AND UTILITY OWNER TO PERFORM THE REPAIRS PROMPTLY ACCORDING TO THEIR REQUIREMENTS AND PER ASSOCIATED CITY PERMITS.
5. THE FOLLOWING ITEMS SHALL BE SUBMITTED BY THE CONTRACTOR TO THE CABQ ENGINEER FOR APPROVAL:
   A. A STREET CROSS-SECTION THAT INCLUDES THE FOLLOWING INFORMATION:
      - THE CURB AND GUTTER, ASPHALT CONCRETE (AC) ROADWAY APPROXIMATE THICKNESS, BASE, DEPTH, AND WIDTH OF MICRO-TRENCH, DEPTH OF TOPMOST CONDUIT, DISTANCES OF MICRO-TRENCH TO FACE OF GUTTER, CURB, CONCRETE PAVEMENT, OR STRUCTURE AS APPLICABLE, BACKFILL MATERIAL, AND ROADWAY STRIPING.
      - DETAIL SHOWING CONDUIT FROM MAIN MICRO-TRENCH ALIGNMENT TO LATERAL SURFACE CONNECTIONS INCLUDING TO ANY JUNCTION/PULL BOX. INCLUDE SPECIFIC INFORMATION OF DEPTH, SIZE, AND METHOD OF EXCAVATION BELOW EXISTING CURB AND GUTTER
      - CUT SHEETS OF THE PROPOSED EQUIPMENT PARTICULARLY SUITABLE FOR MICRO-TRENCHING, INCLUDING:
   B. MICRO-TRENCHER CAPABLE OF MEETING TARGET DEPTH AND WIDTH IN A SINGLE PASS WITH AN INTEGRAL HOOD AND ASSOCIATED VACUUM SYSTEM. SELECTION OF CUTTING WHEEL SHALL BE SUCH THAT IT MINIMIZES DAMAGE TO THE ADJACENT AC SURFACE.
   C. MOBILE CONCRETE/SLURRY PLACEMENT WITH AN ON-BOARD VIBRATOR AND NARROW TROUGH TO MATCH MICRO-TRENCH WIDTH
   D. MOBILE GROUND PENETRATING RADAR SYSTEM THAT IS CAPABLE OF LOCATING BOTH METALLIC AND NON-METALLIC PIPES AND CABLES TO A DEPTH OF 24-INCHES
   E. OTHER SITE-SPECIFIC ITEMS AS REQUIRED BY THE COA ENGINEER

LIMITS OF REMOVALS, TRENCH WIDTH AND LOCATION:

1. MICRO-TRENCH SHALL BE CONSTRUCTED WITH CONTINUOUS UNIFORM STRAIGHT AND NEAT EDGES.
2. MICRO-TRENCH ALIGNMENTS SHALL CONSIST OF RUNS PARALLEL TO THE CENTERLINE OF THE STREET, STREET CROSSING MAY BE DONE PROVIDED THE ALIGNMENT IS PERPENDICULAR TO THE STREET CENTERLINE TO THE EXTENT POSSIBLE.
3. IF NO CURBS OR GUTTER ARE PRESENT, THE CENTER OF THE MICRO-TRENCH CAN BE LOCATED IN THE UNPAVED SHOULDER OR IF LOCATED IN THE PAVEMENT THE TRENCH SHALL BE A MINIMUM OF 24-INCHES TO 36-INCHES FROM THE EXISTING EDGE OF PAVEMENT TO AVOID PLACING TRENCH IN CONFLICT WITH STRIPING (EDGE OF PAVEMENT MARKINGS) OR TRAFFIC WHEEL PATHS.
4. MICRO-TRENCHING MAY BE PERMITTED UPON THE CABQ ENGINEER'S DISCRETION ON SPECIAL PAVEMENTS SUCH AS DECORATIVE ASPHALT PAVING, AND THROUGH EXISTING IMPROVEMENTS SUCH AS PERPENDICULAR TO SPEED BUMPS, SPECIAL PAVEMENTS AND EXISTING IMPROVEMENTS SHALL BE RESTORED IN KIND.
5. THE MINIMUM DEPTH TO TOP OF CONDUIT SHALL BE 10 INCHES FOR RESIDENTIAL ROADS, 12 INCHES FOR ALL OTHER ROADS, OR 4- INCHES BELOW THE BOTTOM OF THE EXISTING AC PAVEMENT OR ANY OTHER SURFACE TYPE: WHICHEVER IS GREATER.
6. IF FLEXIBLE CONDUIT IS USED, ANCHORS/SPACERS SHALL BE PLACED AT A MAXIMUM OF 10-FEET APART ALONG THE ALIGNMENT TO ENSURE THE CONDUIT DOES NOT RISE FROM THE BOTTOM OF THE MICRO-TRENCH AND DOES NOT TOUCH THE WALLS OF THE MICRO- TRENCH DURING INSTALLATION.

BACKFILL:

7. ALL MICRO-TRENCHES SHALL BE COMPLETELY BACKFILLED WITH A CEMENT SAND SLURRY TO FINISH GRADE (CONCRETE MIX DESIGN SHALL BE SUBMITTED TO THE CABQ FOR REVIEW PRIOR TO TRENCHING). A TOE PATCH SHALL BE MILLED A MINIMUM OF 2 INCHES DEEP AND A MINIMUM OF 1-FT WIDE. ASPHALT CONCRETE AND TACK COAT INSTALLED PER CABQ STANDARDS.

VAULTS AND SERVICE CONNECTIONS:

8. CONNECTION TO SERVICE LATERALS, JUNCTION BOXES, ETC., SHALL BE DONE SUCH THAT CURB AND GUTTER IS NOT DISTURBED, SETTLED, OR DAMAGED. REMOVAL LIMITS OF SIDEWALK SHALL FOLLOW APPLICABLE STANDARDS AND REQUIREMENTS AS APPROVED BY THE ENGINEER.
9. THE USE OF HYDRO-JETTING IS NOT PERMITTED. TRENCHLESS METHODS SHALL NOT CREATE A VOID TWO TIMES GREATER THAN CONDUIT. VOID SHALL BE COMPACTED AND BACKFILLED WITH APPROVED CONTROLLED LOW-STRENGTH MATERIAL (CLSM) PAVEMENT MARKINGS.

PAVEMENT MARKINGS:

10. WHERE MICRO-TRENCHING CROSSES ANY EXISTING PAVEMENT MARKINGS, ARROWS, OR WORD MARKINGS, THE CONTRACTOR SHALL RESTORE OR REPLACE ANY PAVEMENT MARKINGS IN KIND; SUBJECT TO ACCEPTANCE BY THE INSPECTOR.

ITEM	PART NUMBER	QUANTITY	TYPE
PFP	BJCNDM432-100ST	1	EACH
PFPHH	HH30x60	1	EACH
FST'S	EVOLV425RAW	3	EACH
	EVOLV625RAW	2	EACH
	EVOLV825RAW	2	EACH
	EVOLV4200RAW	1	EACH
	EVOLV4300RAW	5	EACH
	EVOLV4400RAW	1	EACH
	EVOLV4500RAW	3	EACH
	EVOLV6100RAW	1	EACH
	EVOLV6200RAW	4	EACH
	EVOLV6300RAW	3	EACH
	EVOLV6400RAW	2	EACH
	EVOLV6500RAW	5	EACH
	EVOLV8100RAW	1	EACH
	EVOLV8300RAW	1	EACH
	EVOLV8400RAW	1	EACH
	EVOLV41000RAW	5	EACH
	EVOLV61000RAW	3	EACH
	EVOLV81000RAW	3	EACH
	EVOLV121000RAW	1	EACH
	EVOLV12300RAW	1	EACH
	EVOLV12400RAW	1	EACH
	EVOLV12500RAW	1	EACH
CONDUIT	IDUCT 1.25 W TAPE	3804	FEET
	2" SDR-11 Smooth-Wall Orange	8878	FEET
HANDHOLE	HH10X15X12	58	EACH
	HH17x30x24	22	EACH
	HH30x48	2	EACH
	HH30x60	1	EACH
PLICE CLOSUR	FOSC400A8	10	EACH
	FOSC450B6	3	EACH
	FOSC450C63	2	EACH
FIBER CABLES	5B92MT-048	421	FEET
	5B92MT-144	854	FEET
	5BQ2MR-432	529	FEET
	5BQ2MT-048	1149	FEET
	5BQ2MT-072	767	FEET
	5BQ2MT-144	1023	FEET
	Armored 288f	964	FEET
GROUNDING	TS 2	0	EACH
	TS 5	0	EACH
STRAND	6M	7965	FEET
ANCHOR	5/8"	13	EACH

OWNER:

GIGAPOWER

CONTRACTOR:

TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
PROJECT NOTES

SCALE:
N.T.S.

REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

CURRENT SHEET:
PN-5

LEGEND

Technical Sites

- AOP
- PFP

Technical Points

- HAND HOLE
- FLOWERPOT
- SPLICE
- GROUNDING
- TERMINAL
- LOOP

- EXISTING POLE
- SS — SELF SUPPORT
- 6M — 6.6M STRAND
- IT COMMS — TRAFFIC COMMUNICATION
- MT — MICROTRENCH
- MT — EXISTING CONDUIT (MICROTRENCH)
- EXISTING CONDUIT (BORE)
- TREE
- BUSHES
- ANCHOR

Infrastructures

- CONDUIT
- INNERDUCT
- AER 48 — MAIN FIBER CABLE
- TAIL — TAIL CABLE

Land Registry Lines

- R/W — R/W — ROW
- EOP — EOP — EOP
- BOC — BOC — BOC
- CENTER LINE
- S/W — S/W — SIDEWALK
- P/L — P/L — PROPERTY LINE
- WW 6" — WASTEWATER PIPE
- W 6" — WATER PIPE
- SJC 10" — SAN JUAN CHAMA
- RW 6" — RECLAIMED WATER
- 1234 — ADDRESS
- MAIN ST NE — STREET NAME
- /STORM\ OR \STORM/ — STORM DRAIN
- STRM — STORM
- S — STORM MH

Scope of work

1.Place (1) 60"x60" TPAD + (1) 30x60 864 PFP CABINET
2.Bore and Install (12,682') HDPE conduit of varying sizes as shown on prints, All conduit shall be placed at a minimum depth of 36" in alleyways and ROW and minimum depth of 36" on arterial or collector streets and a minimum depth of 48" on SANCHEZ RD NW.
3.Place (83) 4'x4'x4' Bore Pits
4.All Utility crossings shall be potholed. Pavement Cut Application required for (19) POTHOLES 18"x18"

- Hard Surface (16) 18"x18"
- Soft Surface (3) 18"x18"

5.30"x60" Pull Boxes (1)
6.30"x48" Pull Boxes (2)
7.Place 24"x36" Pull Boxes (0)
8.Place 17"x30" Pull Boxes (22)
9.Place 10"x15" HH (58)
10.Place 6.6M STRAND (7,965')
11.Pole (93)
12.Anchor & Guy (5/8") (13)
13. Self Supporting Tail (1,534')

WORK TYPE

Total Aerial : 43%
Total Asphalt cut : 0
Total Trench : 0%
Total Bore : 57%
TOTAL FOOTAGE:
22,181'

AREA OF LAND DISTURBANCE:

A. MINIMIZE OR AVOID DISTURBANCE OF PCC PAVEMENTS.
B. ABOVE-GROUND FEATURES (PEDESTALS, CABINETS, ETC.) MAY NOT REDUCE OR OBSTRUCT ADA / PEDESTRIAN PATHS.
C. AREA OF LAND DISTURBANCE BASED ON PEDESTALS, HANDHOLES, CABINETS, ETC. EQUATE TO APPROXIMATELY 1353 SQUARE FEET OF LAND DISTURBANCE.

- (1) 60" x 60" TPAD + (1) 36 x 60 864 PFP CABINET
- (0') 3" WIDTH BORE
- (0) 30" x 60" HH
- (2) 30" x 48" HH
- (0) 24" x 36" HH
- (22) 17" x 30" HH
- (58) 10" x 15" HH
- (83) 4' x 4' BORE PITS

IF THIS AREA IS GREATER THAN 1.0 ACRES, AN EROSION & SEDIMENT CONTROL PLAN AND NOI ARE REQUIRED. CONTACT DOUG HUGHES AT 505.924-3420.

SFU	259
SFU-LIKE(2-4)	4
SFU-LIKE(5-12)	0
MDU	0
PRGC	0
BCL	0
CELL-SITES	0

OWNER: GIGAPOWER

CONTRACTOR: TECH SERV

CPN # ----

PROJECT NAME: PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION: ABQ-003

FDA: 3030PA

SHEET TITLE: LEGEND & S.O.W


SCALE: N.T.S.

REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

nm811 Know what's below. Call before you dig.

CURRENT SHEET: L-1

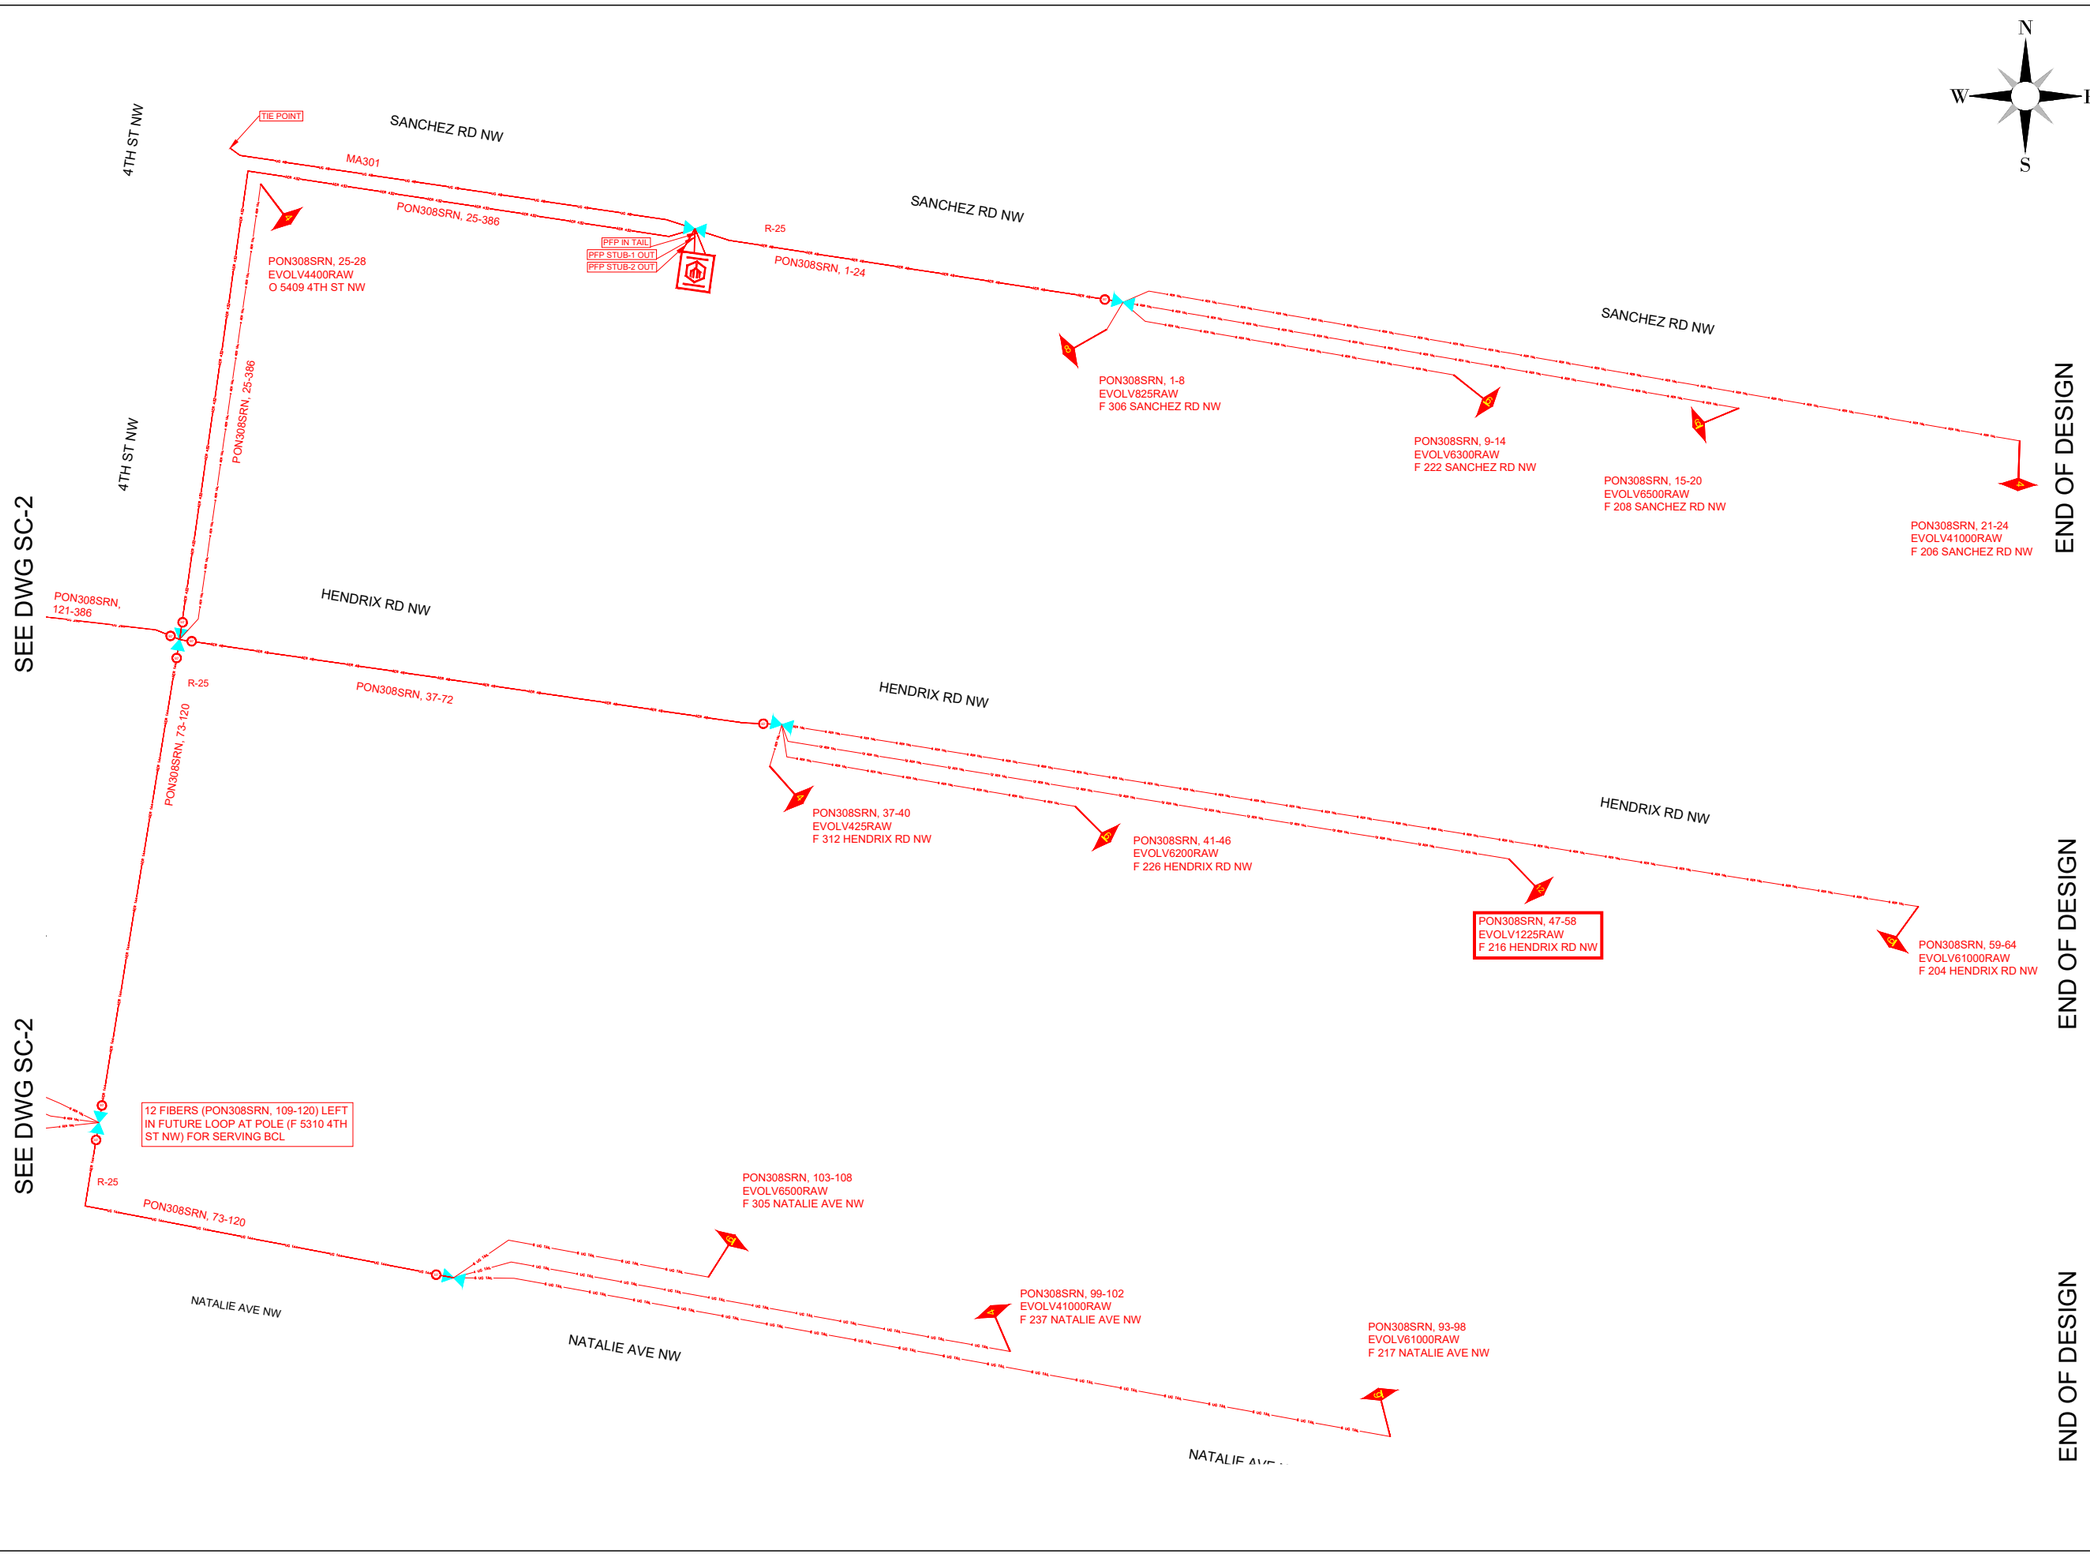

OWNER:

GIGAPOWER

CONTRACTOR:

TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
SCHEMATIC DIAGRAM


SCALE:
N.T.S.

REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

nm811 Know what's below. Call before you dig.

CURRENT SHEET:
SC-1

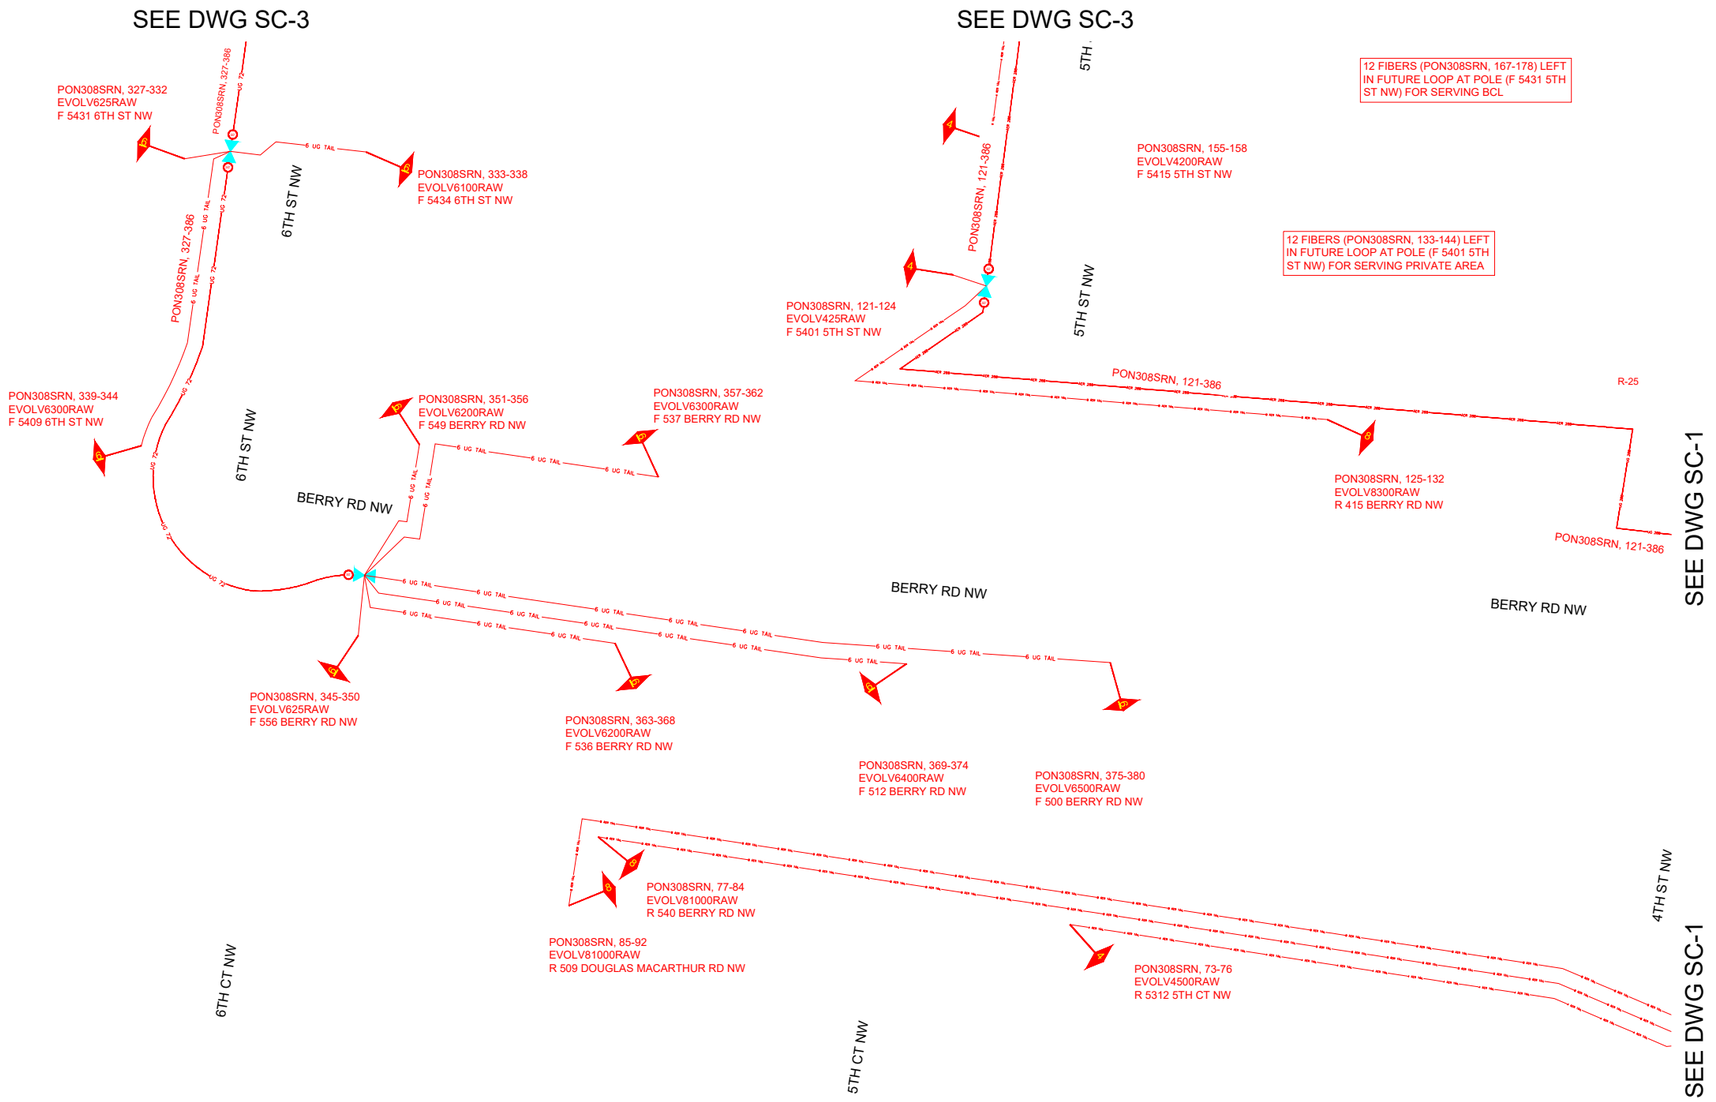

OWNER:

GIGAPOWER

CONTRACTOR:

TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
SCHEMATIC DIAGRAM


SCALE:
N.T.S.

REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

nm811 Know what's below. Call before you dig.

CURRENT SHEET:
SC-2

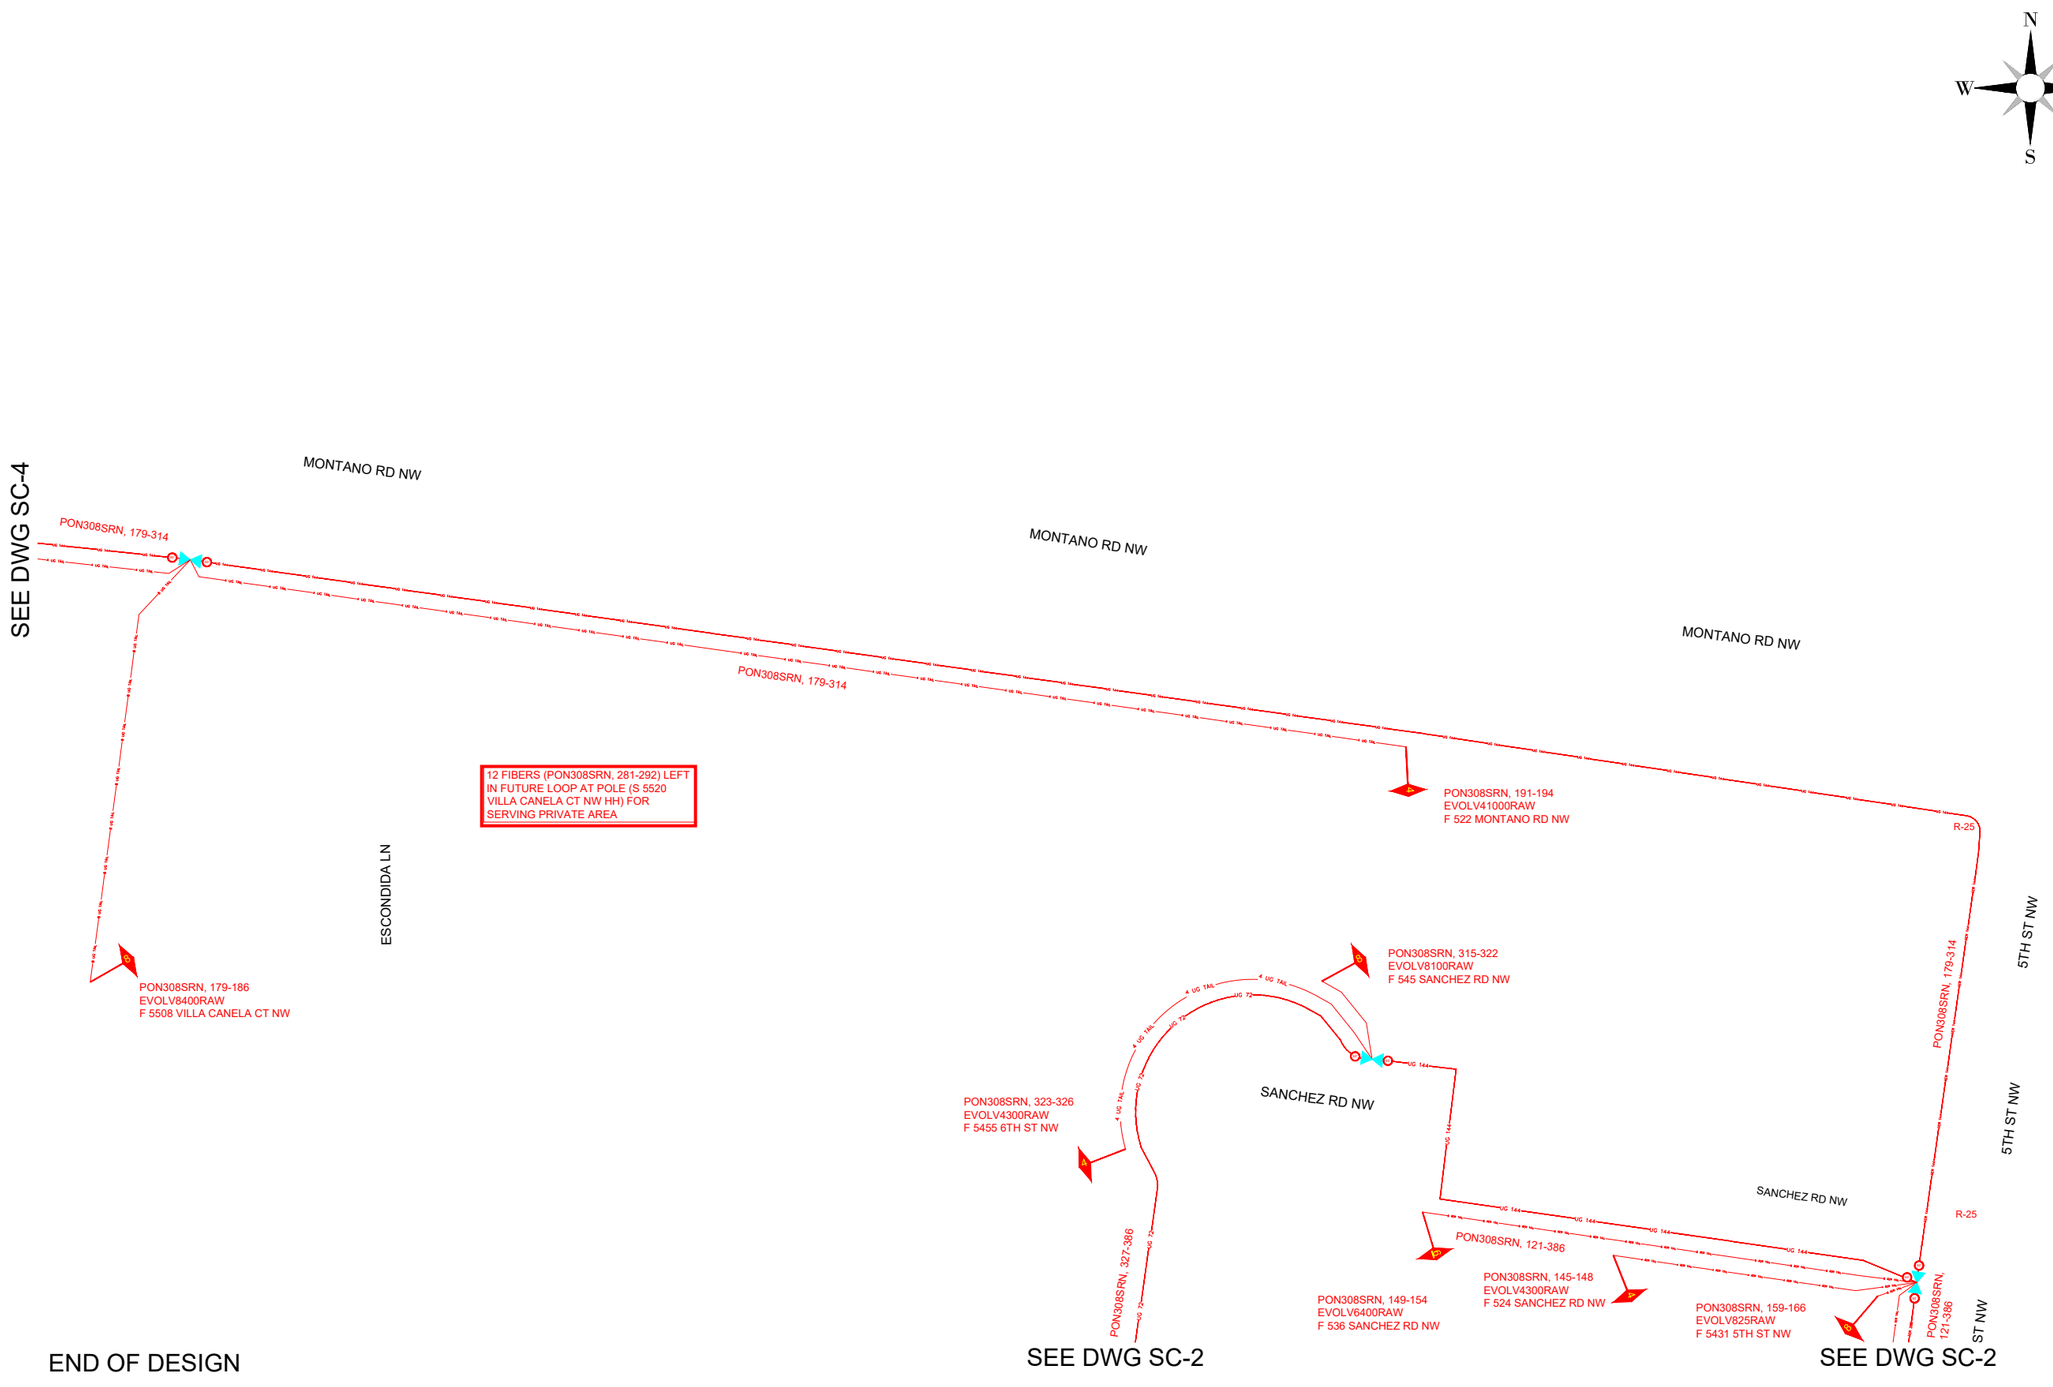

OWNER:

GIGAPOWER

CONTRACTOR:

TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
SCHEMATIC DIAGRAM


SCALE:
N.T.S.

REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

nm811 Know what's below. Call before you dig.

CURRENT SHEET:
SC-3

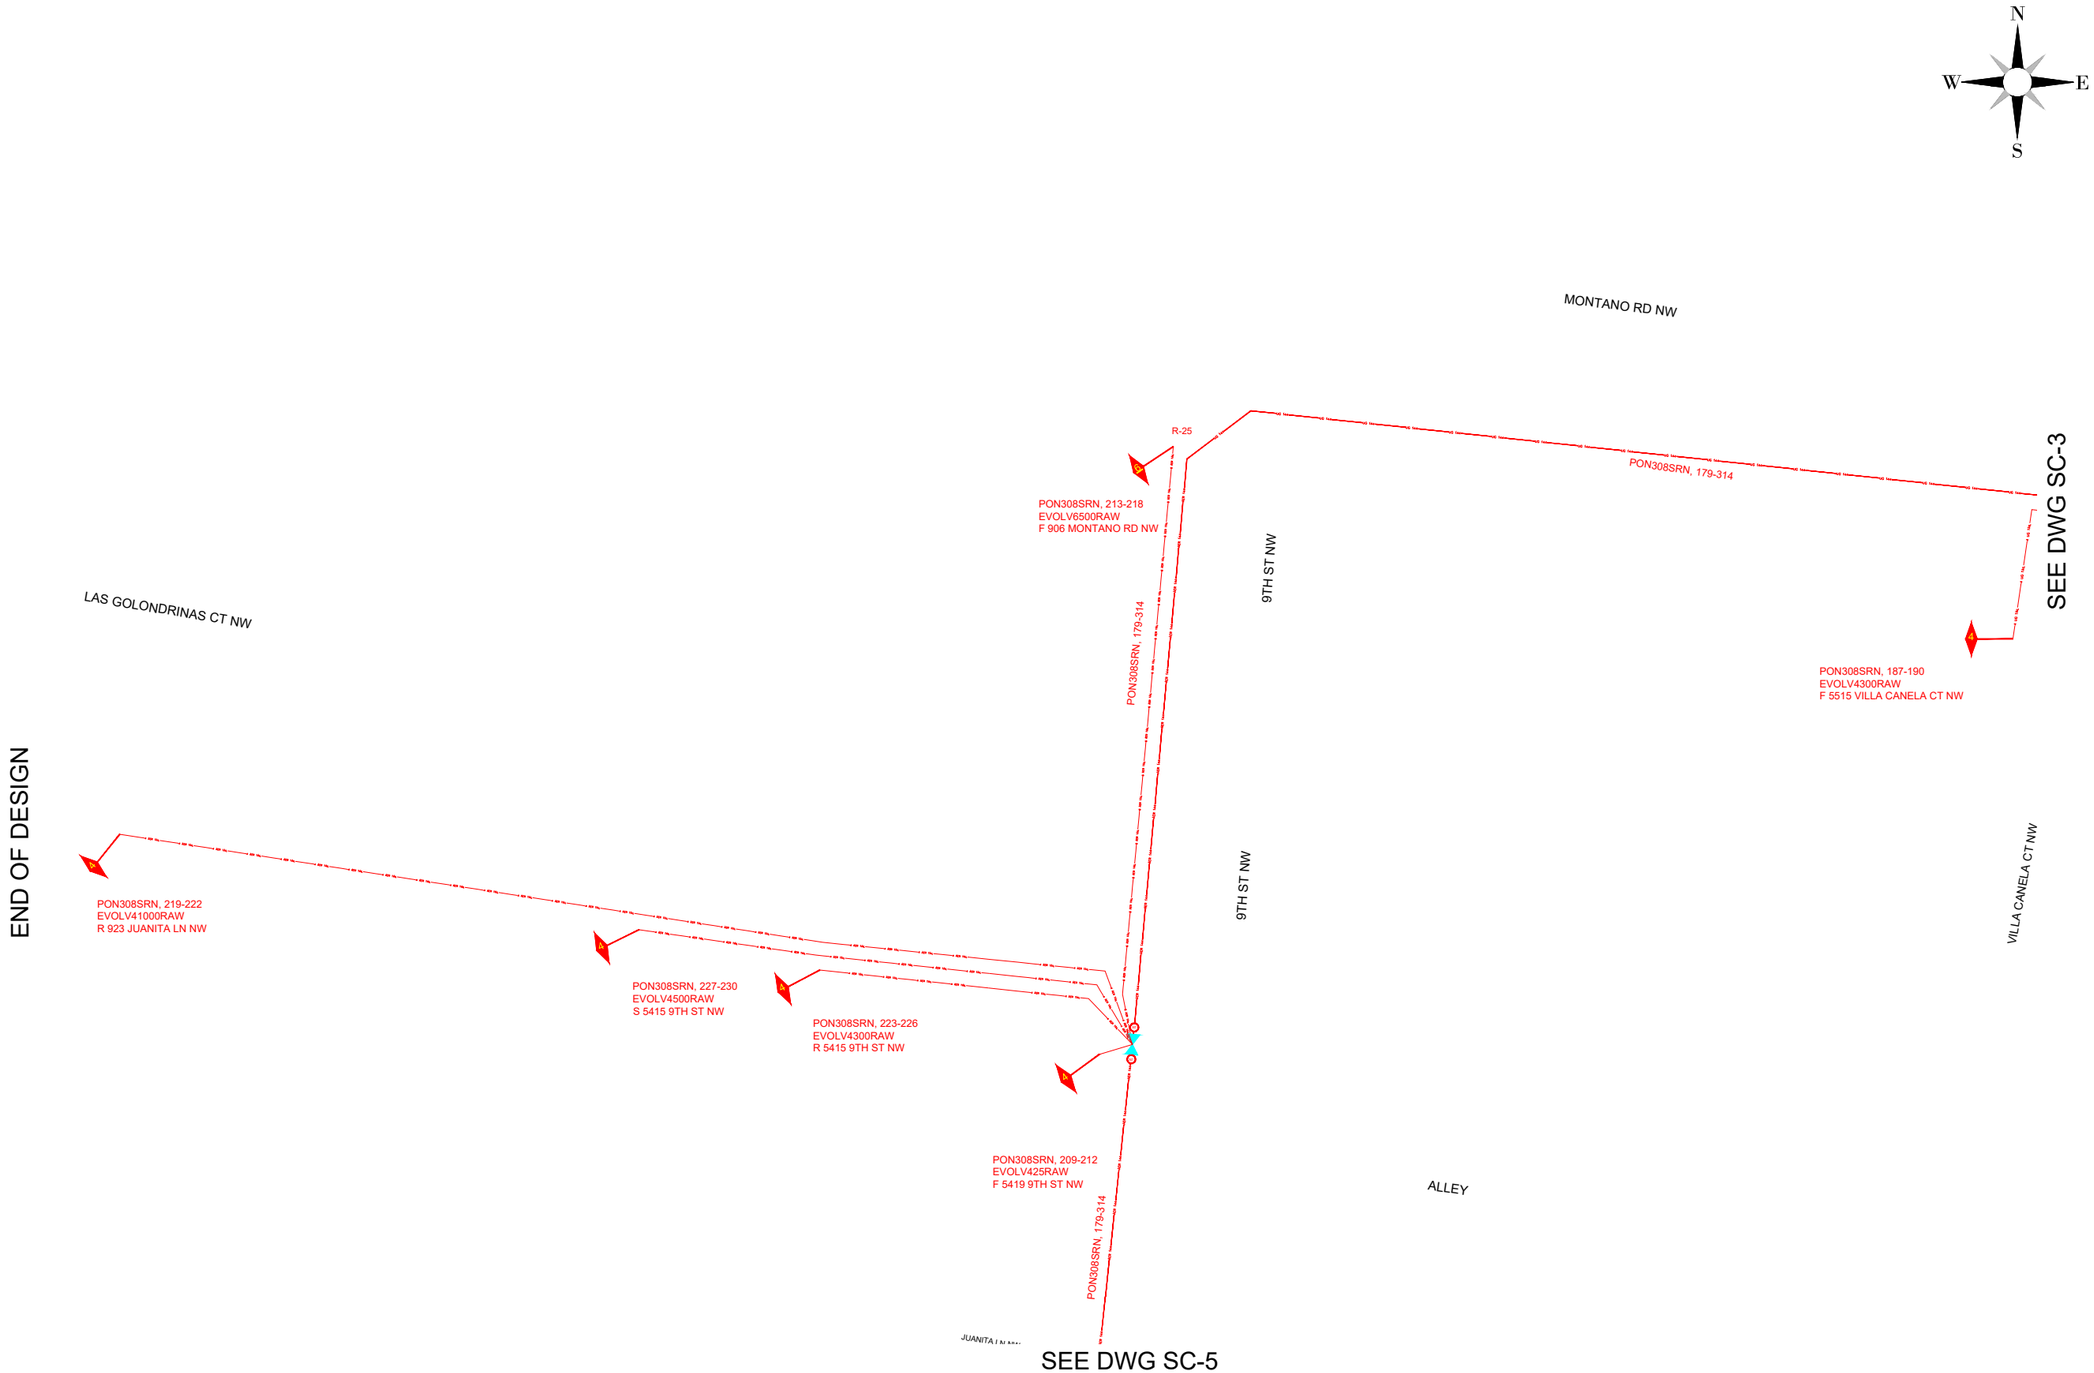

OWNER:

GIGAPOWER

CONTRACTOR:

TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
SCHEMATIC DIAGRAM


SCALE:
N.T.S.

REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

nm811 Know what's below. Call before you dig.

CURRENT SHEET:
SC-4

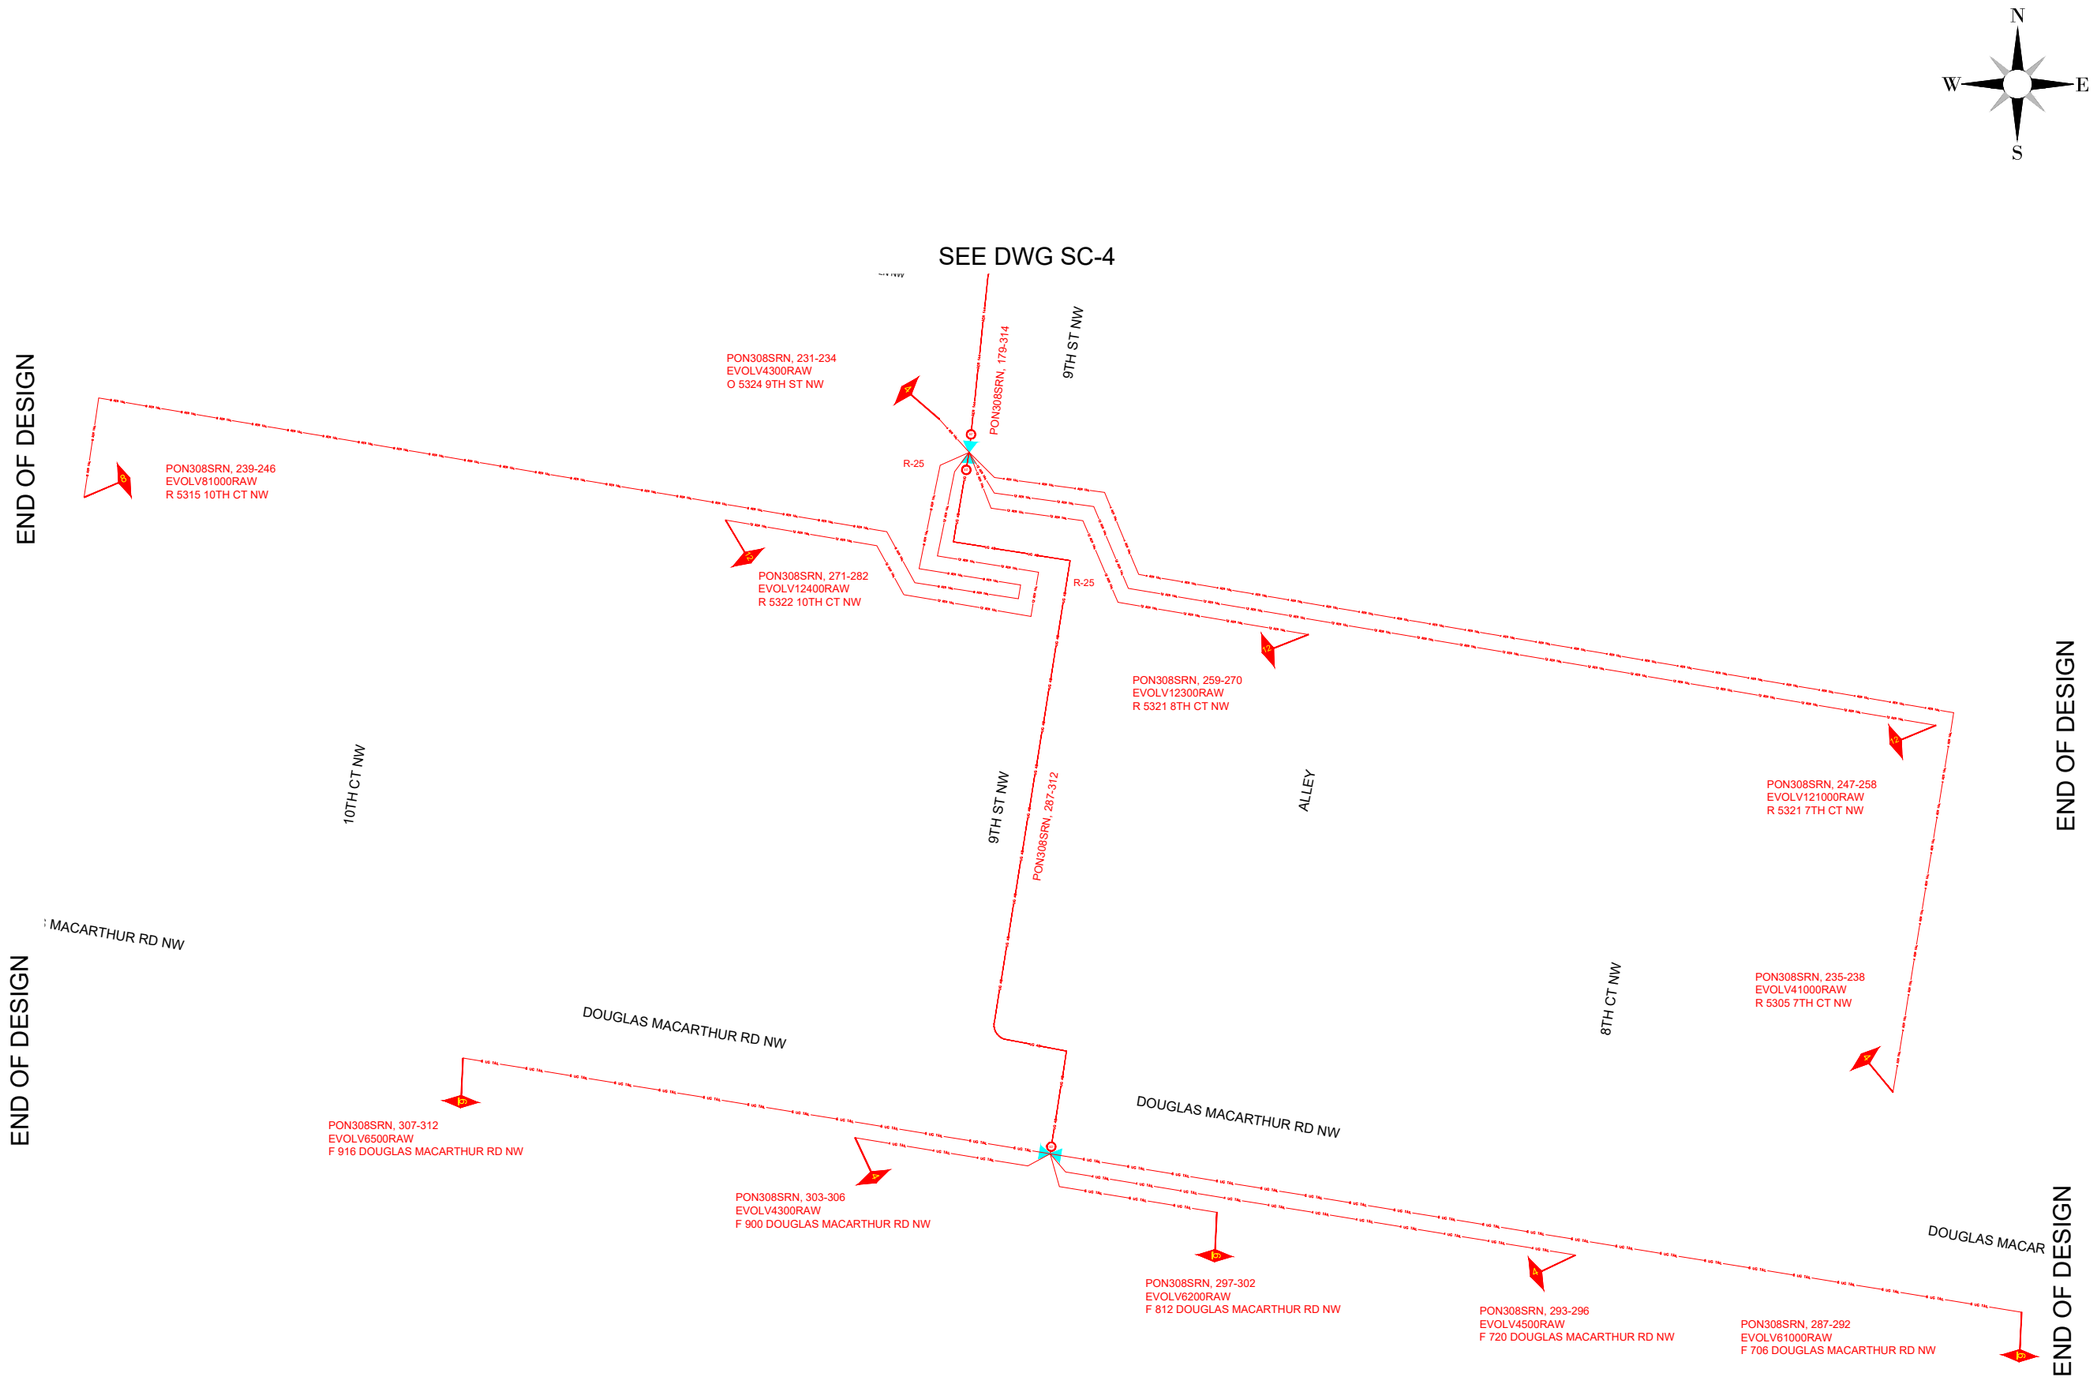

OWNER:

GIGAPOWER

CONTRACTOR:

TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
SCHEMATIC DIAGRAM

SCALE:
N.T.S.

REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

nm811 Know what's below. Call before you dig.

CURRENT SHEET:
SC-5

CONSTRUCTION NOTE:
DO NOT DISTURB ADA SIDEWALK/ ACCESS. IF DAMAGED IT MUST
BE RESTORED AS PER THE CURRENT ADA REGULATIONS.

ANY LANDSCAPING DISTURBANCE IS TO BE COORDINATED WITH HOMEOWNERS BEFORE STARTING CONSTRUCTION. PROMPTLY REPAIR ANY DAMAGE TO IRRIGATION SYSTEMS, AND PROVIDE TEMPORARY IRRIGATION TO PLANTS, IF NECESSARY.

MAINTAIN AT LEAST 2.5FT FROM THE TRAFFIC COMM LINES

CONSTRUCTION NOTE:
1. ALL CONDUIT/CABLES/INNERDUCTS PLACED BY BORE UNLESS NOTED AS MICROTRENCH.
2. TYPICAL HANDHOLE PLACEMENT IS 3' FROM R/W AND 4' FROM EOP UNLESS NOTED.
3. ALL CONDUIT/ CABLES HAVE +5' TURN UP AND +5' TURN DOWN AT EACH HANDHOLE LOCATION

CONSTRUCTION NOTE:
FST TERMINALS MOUNTED ON STRAND ON CO/FEED SIDE OF POLE

CAUTION: BEWARE OF WATER METER AND RESIDENTIAL FEEDER LINES. SEE DETAIL AND NOTES ON PAGE DT-5

N
W E
S

SEE DWG PP-1

SEE DWG PP-2

END OF DESIGN

END OF DESIGN

SANCHEZ RD NW

HENDRIX RD NW

F14B914
F14B341
F14B342
F14B917
F14B343
F14B344
F14B913
F14B135
F14B136
F14B351
F14B354
F14B353
F14B272
F14B352
F14B137
F14B138

PFP IN TAIL
PFP STUB-1 OUT
PFP STUB-2 OUT
HH-1
R-25

PON308SRN, 1-24
PON308SRN, 1-8
EVOLV825RAW
F 306 SANCHEZ RD NW
PON308SRN, 9-14
EVOLV6300RAW
F 222 SANCHEZ RD NW
PON308SRN, 15-20
EVOLV6500RAW
F 208 SANCHEZ RD NW
PON308SRN, 21-24
EVOLV41000RAW
F 206 SANCHEZ RD NW
PON308SRN, 37-40
EVOLV425RAW
F 312 HENDRIX RD NW
PON308SRN, 41-46
EVOLV6200RAW
F 226 HENDRIX RD NW
PON308SRN, 47-58
EVOLV1225RAW
F 216 HENDRIX RD NW
PON308SRN, 59-64
EVOLV61000RAW
F 204 HENDRIX RD NW

NEW POLE

OWNER:
GIGAPOWER

CONTRACTOR:
TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
PROJECT PLAN

SCALE:
1:70


REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

nm811 Know what's below. Call before you dig.

CURRENT SHEET:
PFP-1

HH DETAIL WINDOW

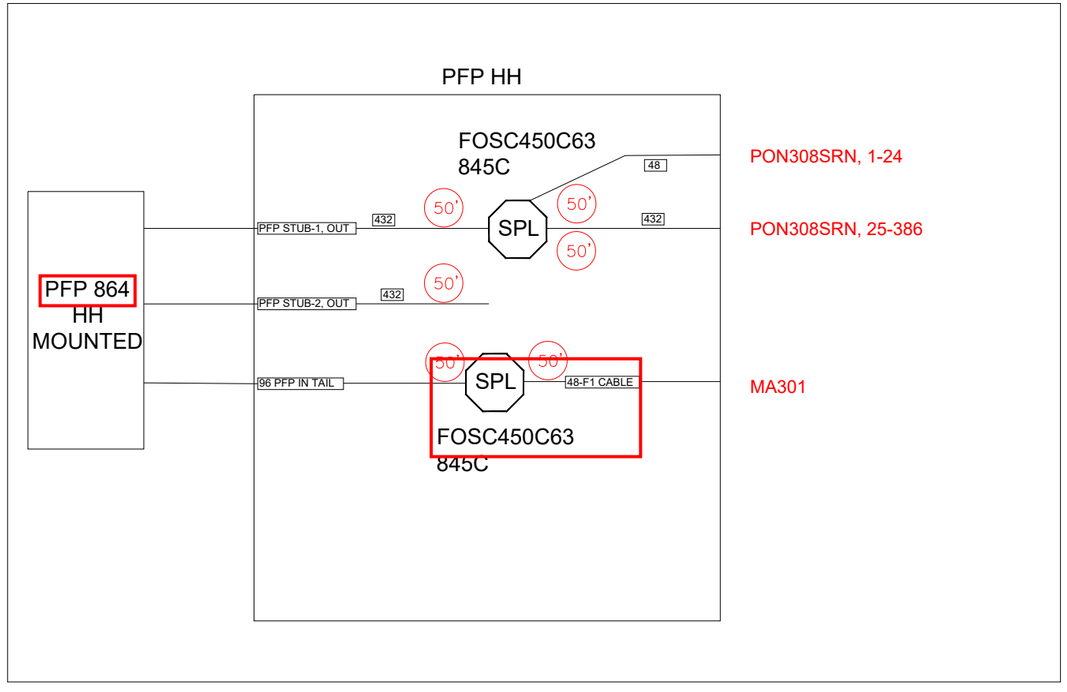

OWNER:

GIGAPOWER

CONTRACTOR:

TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
PROJECT PLAN

SCALE:
N.T.S.

REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

nm811 Know what's below. Call before you dig.

CURRENT SHEET:
PFP-1A

CONSTRUCTION NOTE:
DO NOT DISTURB ADA SIDEWALK/ ACCESS. IF DAMAGED IT MUST
BE RESTORED AS PER THE CURRENT ADA REGULATIONS.


ANY LANDSCAPING DISTURBANCE IS TO BE COORDINATED WITH HOMEOWNERS BEFORE STARTING CONSTRUCTION. PROMPTLY REPAIR ANY DAMAGE TO IRRIGATION SYSTEMS, AND PROVIDE TEMPORARY IRRIGATION TO PLANTS, IF NECESSARY.

MAINTAIN AT LEAST 2.5FT FROM THE TRAFFIC COMM LINES

CONSTRUCTION NOTE:
1. ALL CONDUIT/CABLES/INNERDUCTS PLACED BY BORE UNLESS NOTED AS MICROTRENCH.
2. TYPICAL HANDHOLE PLACEMENT IS 3' FROM R/W AND 4' FROM EOP UNLESS NOTED.
3. ALL CONDUIT/ CABLES HAVE +5' TURN UP AND +5' TURN DOWN AT EACH HANDHOLE LOCATION

CONSTRUCTION NOTE:
FST TERMINALS MOUNTED ON STRAND ON CO/FEED SIDE OF POLE

CAUTION: BEWARE OF WATER METER AND RESIDENTIAL FEEDER LINES. SEE DETAIL AND NOTES ON PAGE DT-5

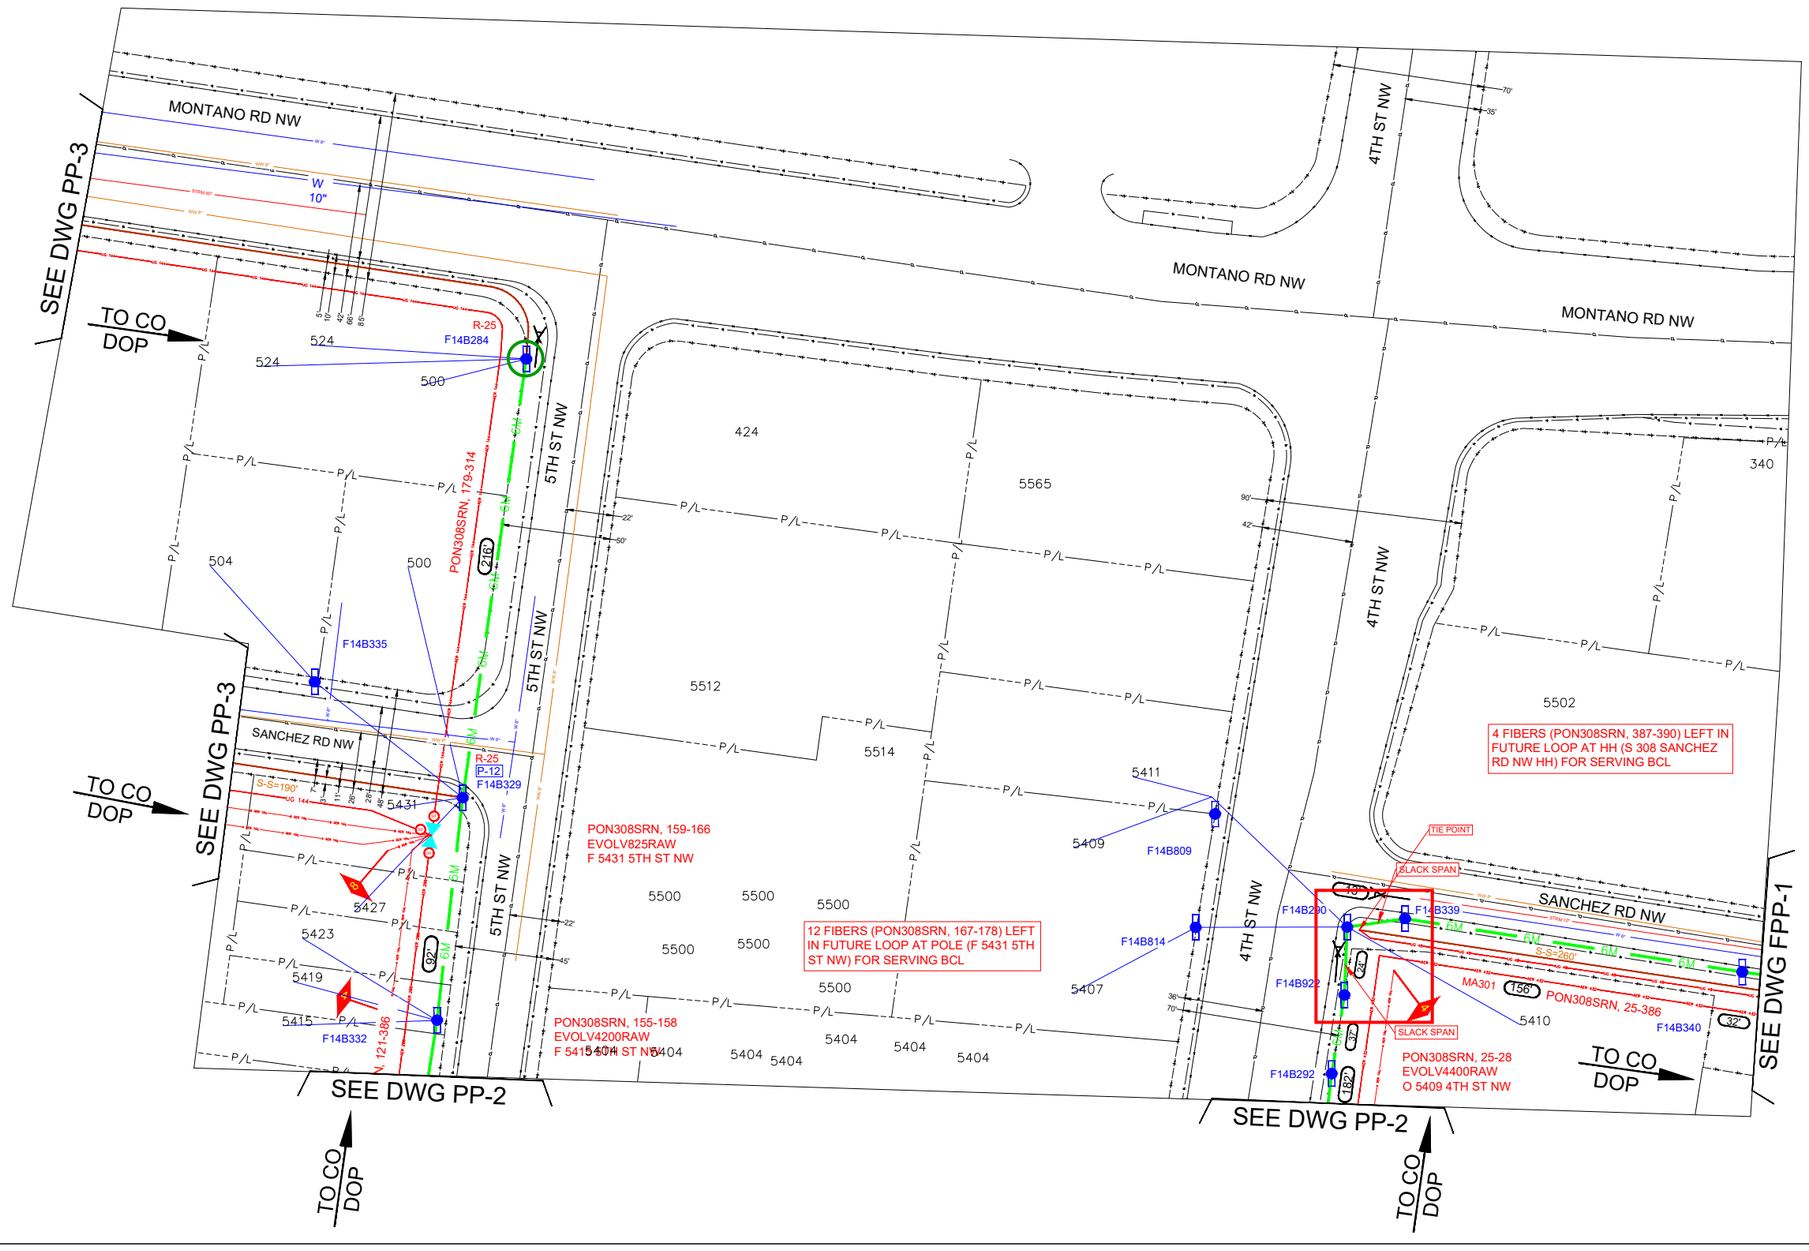

N
W E
S

OWNER:

GIGAPOWER

CONTRACTOR:

TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
PROJECT PLAN

SCALE:
1:70

REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

nm811 Know what's below. Call before you dig.

CURRENT SHEET:
PP-1

CONSTRUCTION NOTE:
DO NOT DISTURB ADA SIDEWALK/ ACCESS. IF DAMAGED IT MUST
BE RESTORED AS PER THE CURRENT ADA REGULATIONS.


ANY LANDSCAPING DISTURBANCE IS TO BE COORDINATED WITH HOMEOWNERS BEFORE STARTING CONSTRUCTION. PROMPTLY REPAIR ANY DAMAGE TO IRRIGATION SYSTEMS, AND PROVIDE TEMPORARY IRRIGATION TO PLANTS, IF NECESSARY.

MAINTAIN AT LEAST 2.5FT FROM THE TRAFFIC COMM LINES

CONSTRUCTION NOTE:
1. ALL CONDUIT/CABLES/INNERDUCTS PLACED BY BORE UNLESS NOTED AS MICROTRENCH.
2. TYPICAL HANDHOLE PLACEMENT IS 3' FROM R/W AND 4' FROM EOP UNLESS NOTED.
3. ALL CONDUIT/ CABLES HAVE +5' TURN UP AND +5' TURN DOWN AT EACH HANDHOLE LOCATION

CAUTION: BEWARE OF WATER METER AND RESIDENTIAL FEEDER LINES. SEE DETAIL AND NOTES ON PAGE DT-5

CONSTRUCTION NOTE:
FST TERMINALS MOUNTED ON STRAND ON CO/FEED SIDE OF POLE

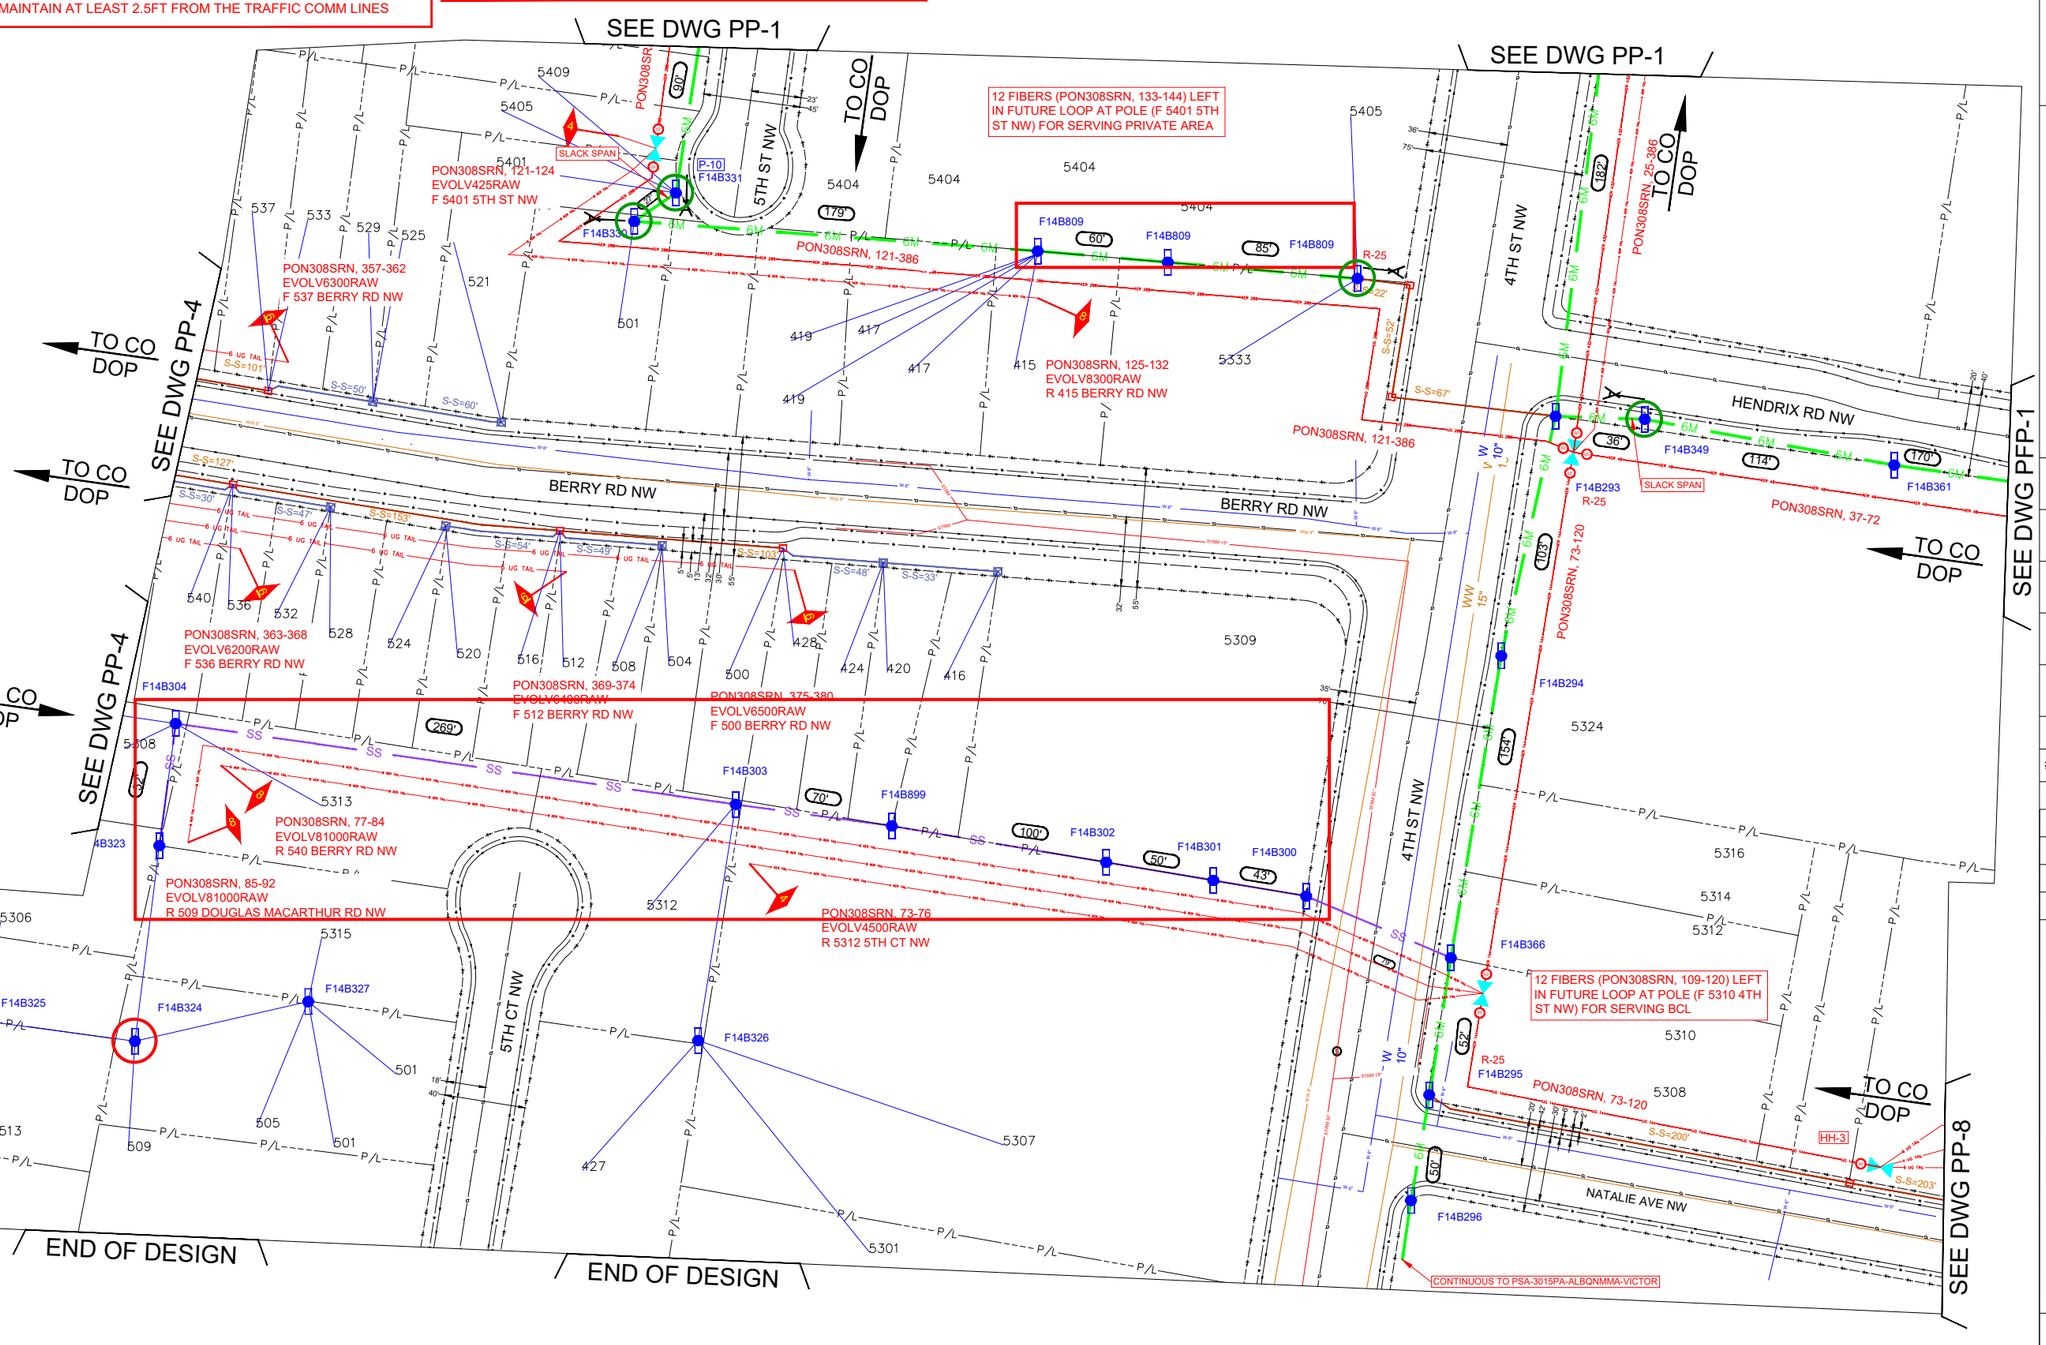

OWNER:
GIGAPOWER

CONTRACTOR:
TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
PROJECT PLAN


SCALE:
1:70

REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

nm811 Know what's below. Call before you dig.

CURRENT SHEET:
PP-2

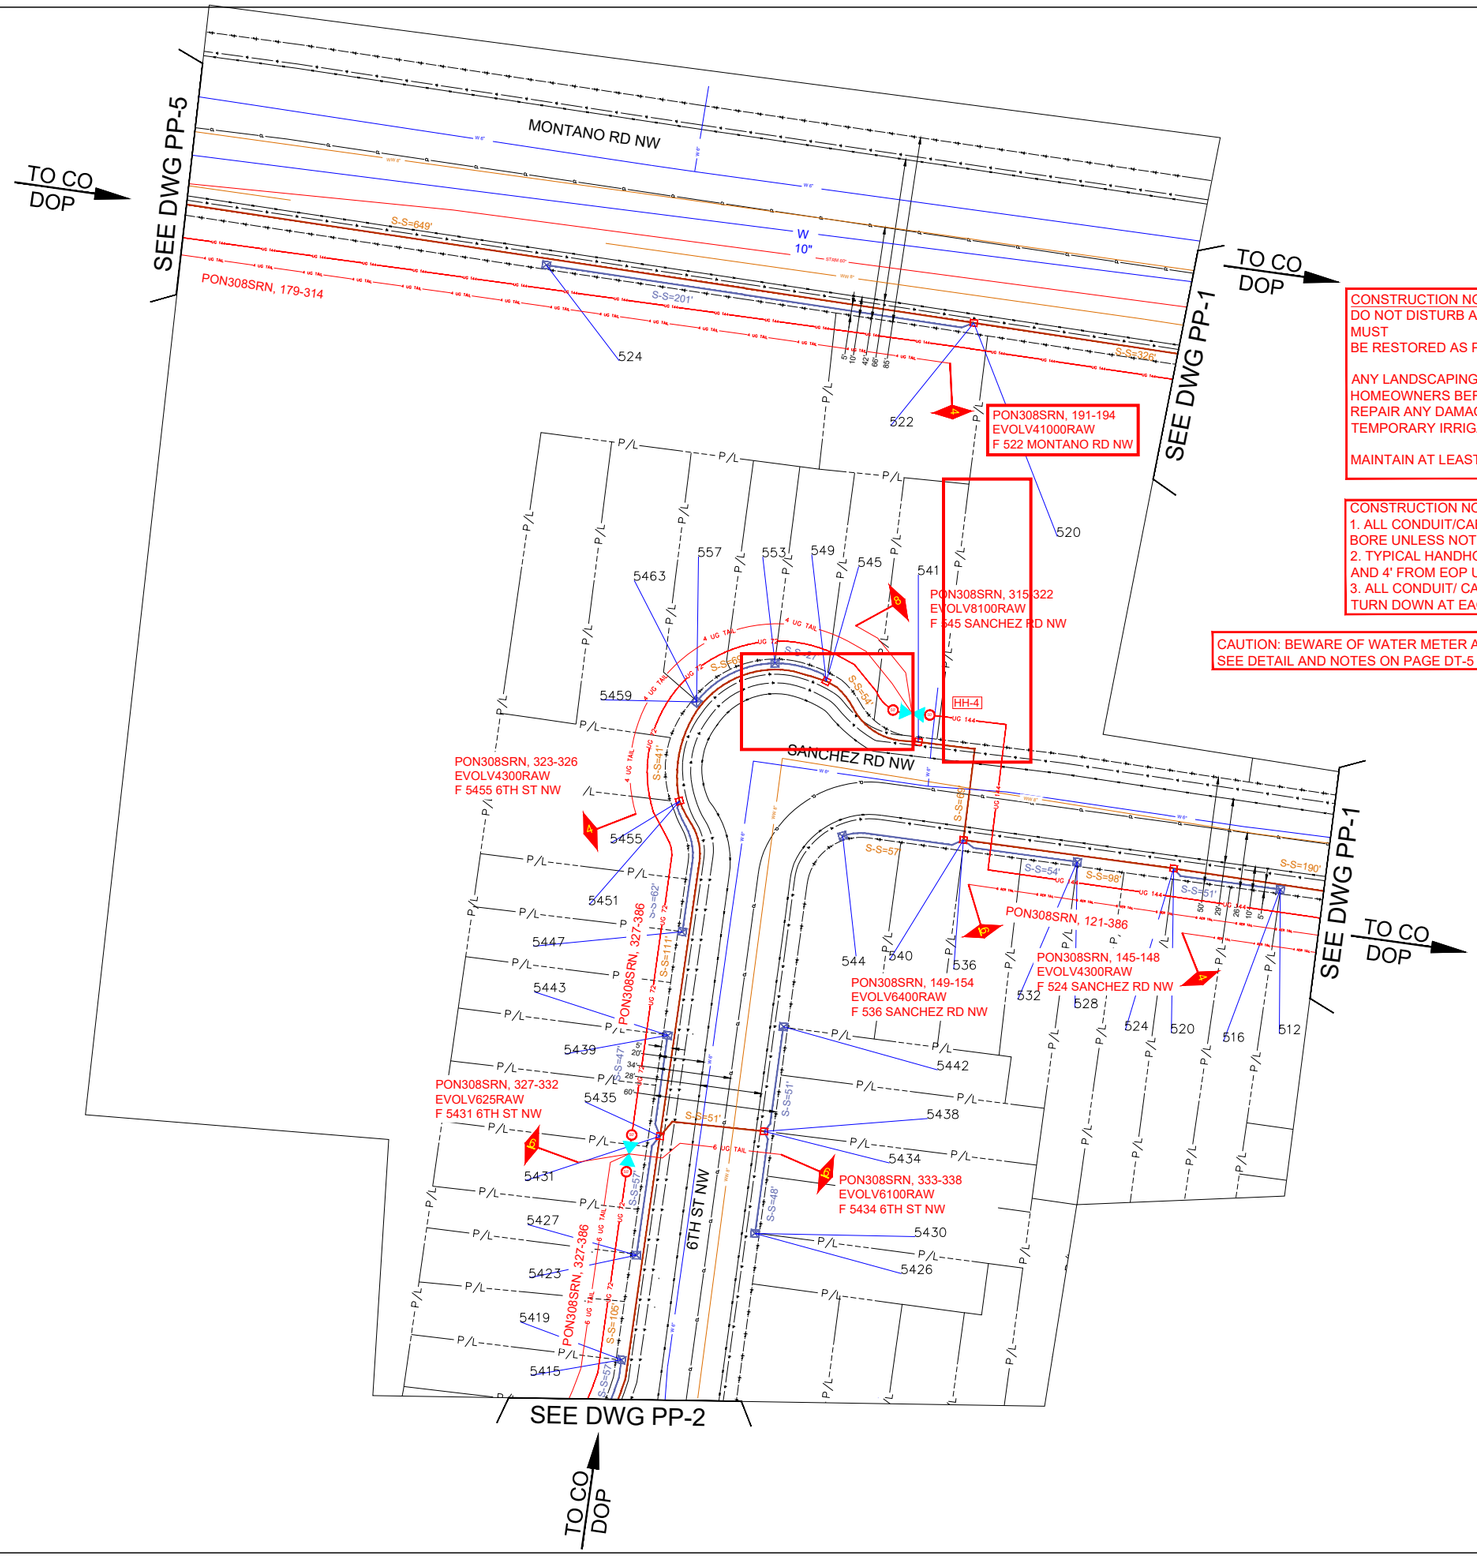

OWNER:

GIGAPOWER

CONTRACTOR:

TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
PROJECT PLAN

SCALE:
1:70

REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

nm811 Know what's below. Call before you dig.

CURRENT SHEET:
PP-3

CONSTRUCTION NOTE:
DO NOT DISTURB ADA SIDEWALK/ ACCESS. IF DAMAGED IT MUST
BE RESTORED AS PER THE CURRENT ADA REGULATIONS.


ANY LANDSCAPING DISTURBANCE IS TO BE COORDINATED WITH HOMEOWNERS BEFORE STARTING CONSTRUCTION. PROMPTLY REPAIR ANY DAMAGE TO IRRIGATION SYSTEMS, AND PROVIDE TEMPORARY IRRIGATION TO PLANTS, IF NECESSARY.

MAINTAIN AT LEAST 2.5FT FROM THE TRAFFIC COMM LINES

CONSTRUCTION NOTE:
1. ALL CONDUIT/CABLES/INNERDUCTS PLACED BY BORE UNLESS NOTED AS MICROTRENCH.
2. TYPICAL HANDHOLE PLACEMENT IS 3' FROM R/W AND 4' FROM EOP UNLESS NOTED.
3. ALL CONDUIT/ CABLES HAVE +5' TURN UP AND +5' TURN DOWN AT EACH HANDHOLE LOCATION

CONSTRUCTION NOTE:
FST TERMINALS MOUNTED ON STRAND ON CO/FEED SIDE OF POLE

CAUTION: BEWARE OF WATER METER AND RESIDENTIAL FEEDER LINES. SEE DETAIL AND NOTES ON PAGE DT-5

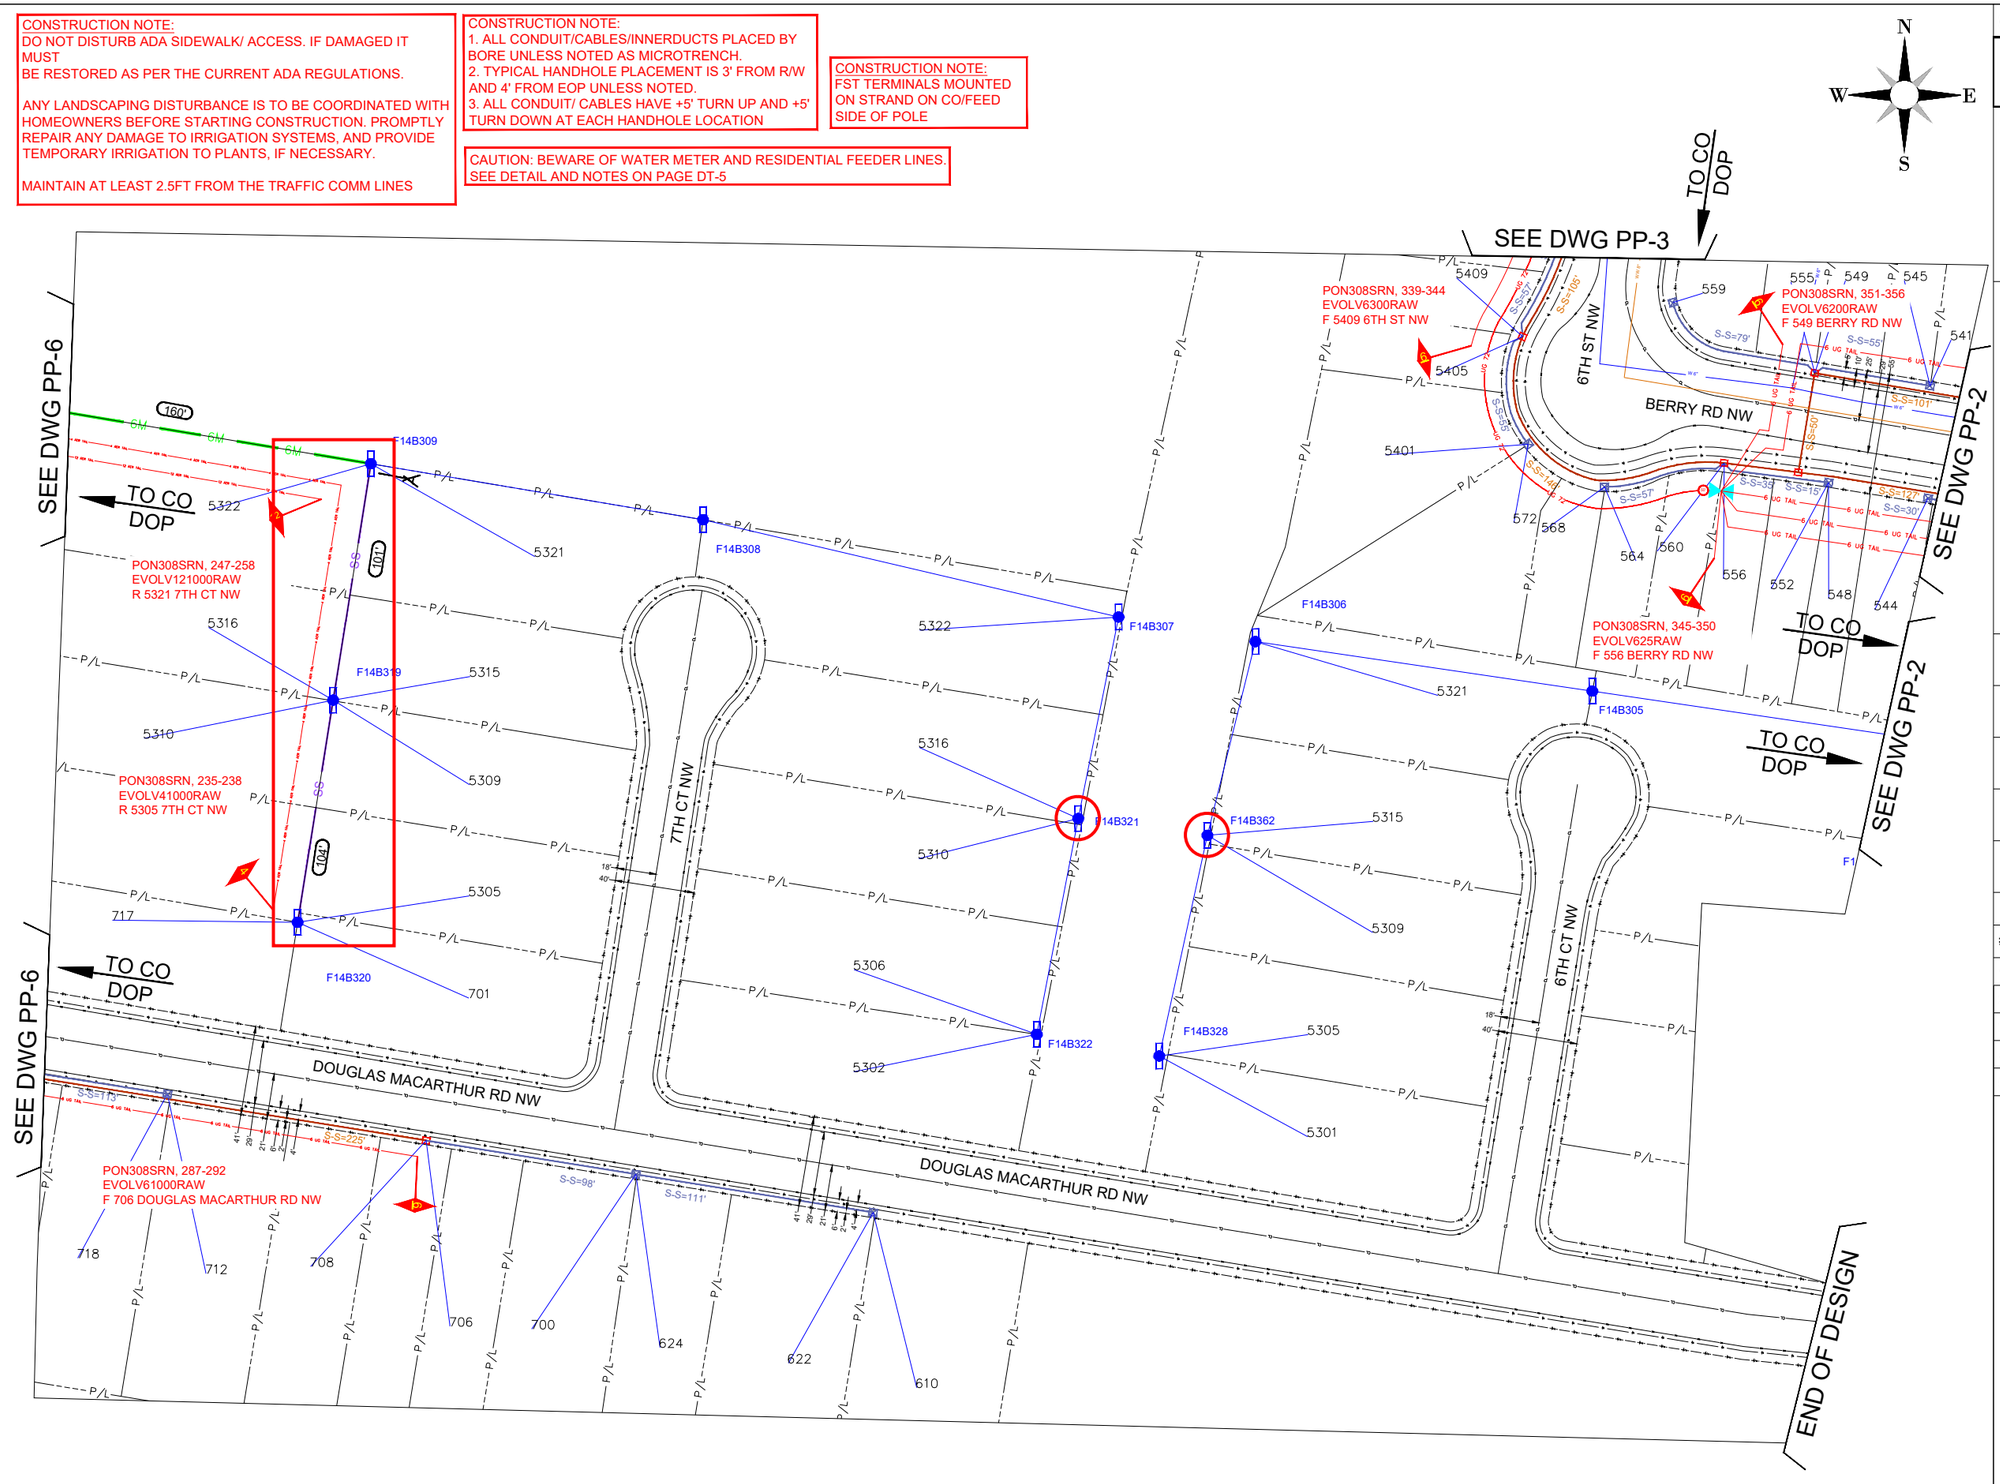

OWNER:

GIGAPOWER

CONTRACTOR:

TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
PROJECT PLAN


SCALE:
1:70

REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

nm811 Know what's below. Call before you dig.

CURRENT SHEET:
PP-4

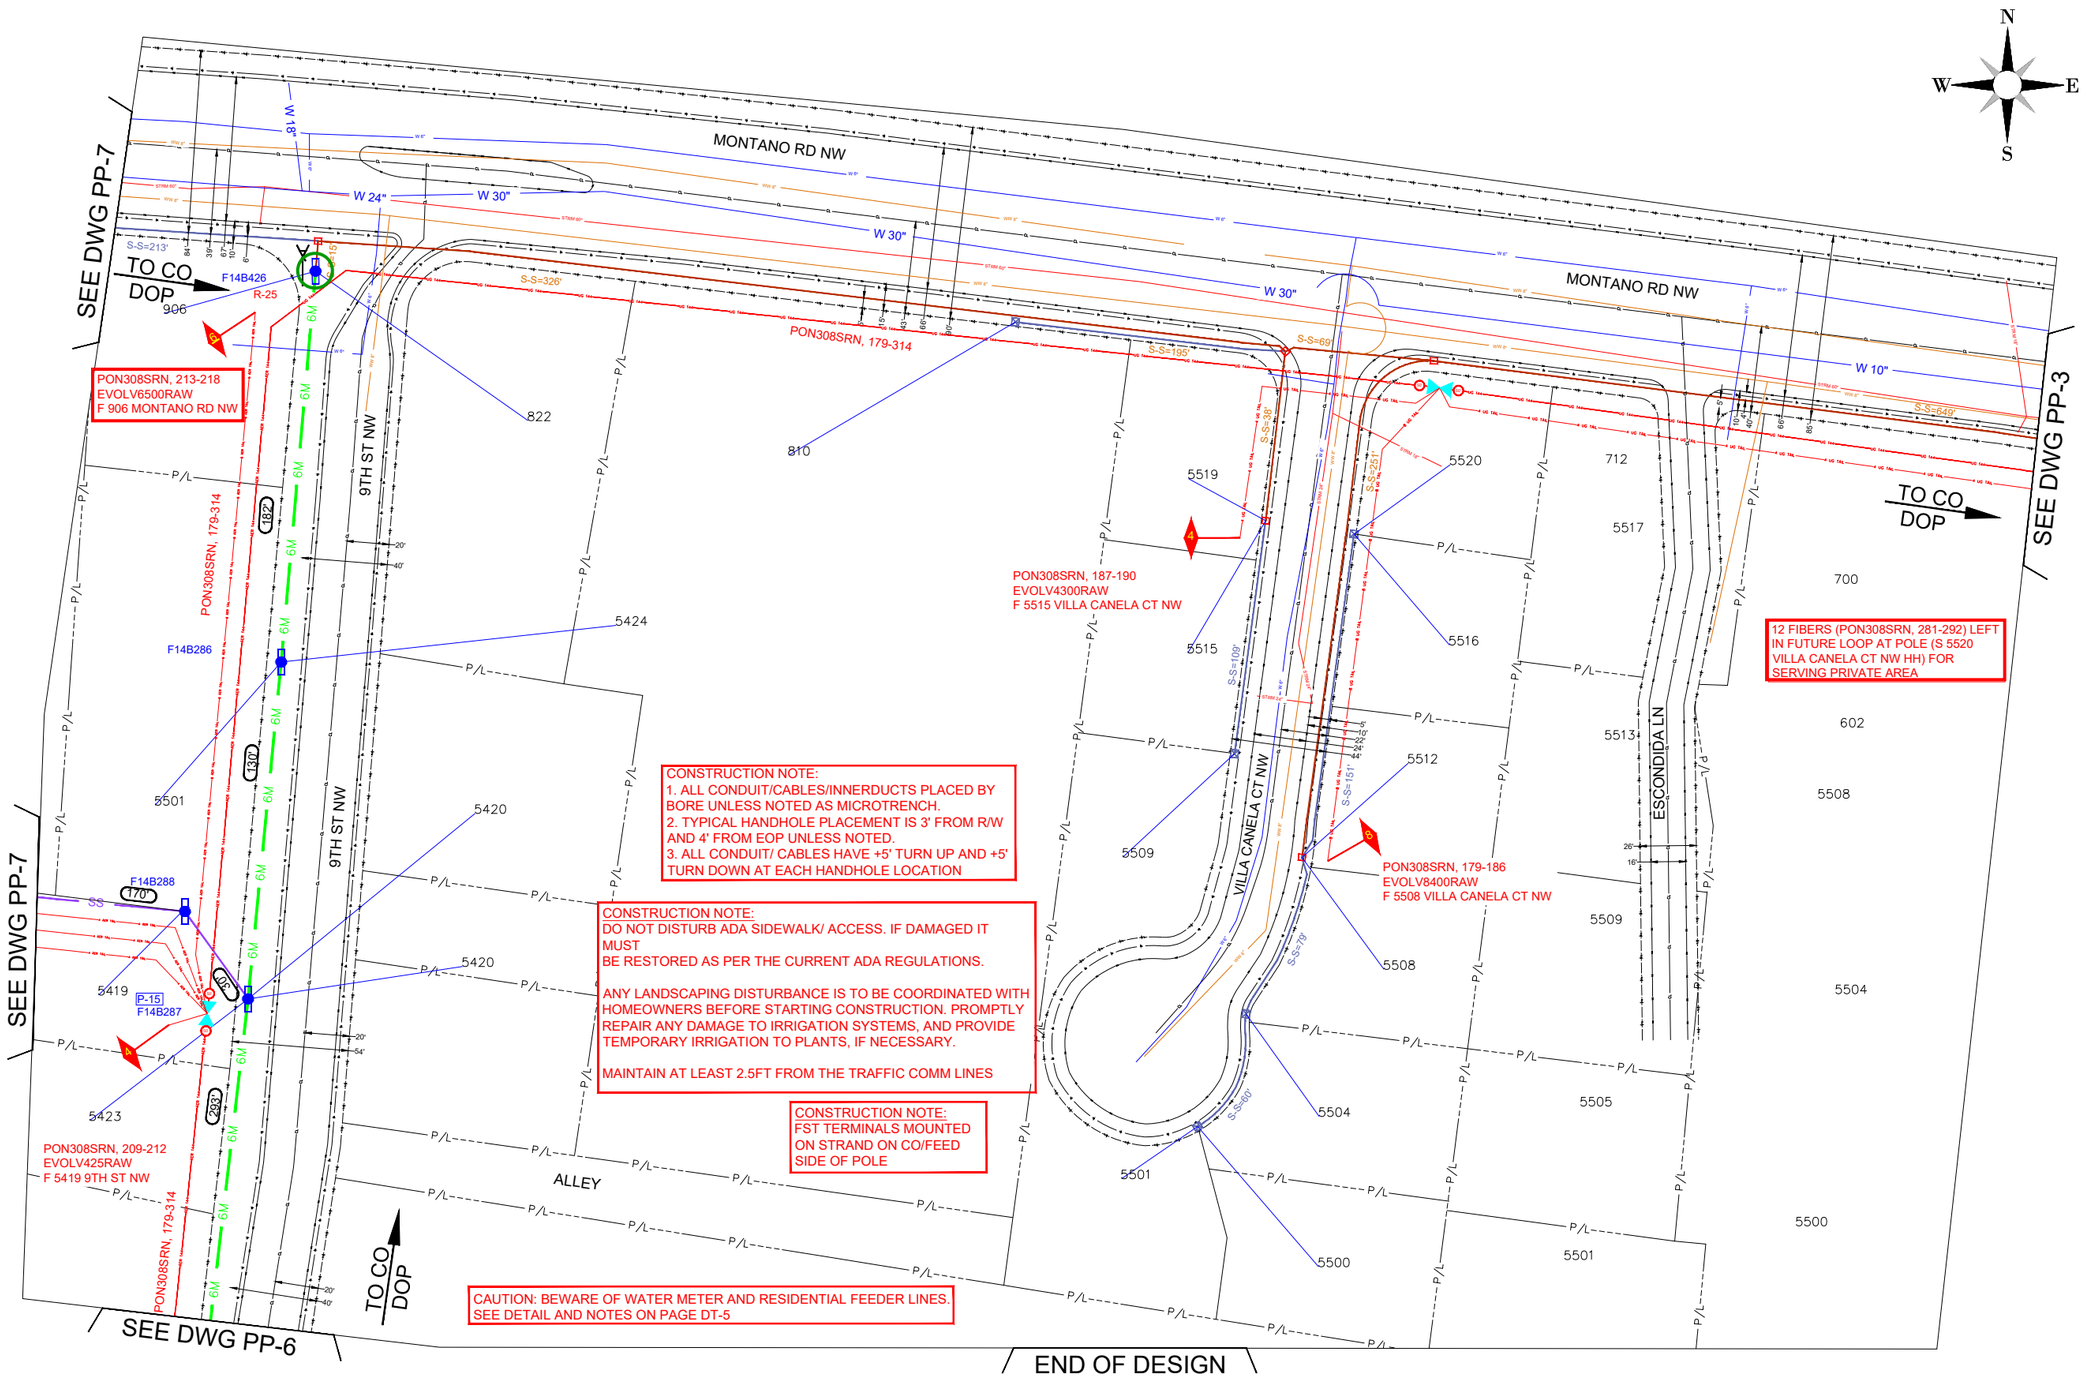

OWNER:

GIGAPOWER

CONTRACTOR:

TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
PROJECT PLAN

SCALE:
1:70

REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

nm811 Know what's below. Call before you dig.

CURRENT SHEET:
PP-5

CONSTRUCTION NOTE:
FST TERMINALS MOUNTED ON STRAND ON CO/FEED SIDE OF POLE

CONSTRUCTION NOTE:
DO NOT DISTURB ADA SIDEWALK/ ACCESS. IF DAMAGED IT MUST BE RESTORED AS PER THE CURRENT ADA REGULATIONS.

ANY LANDSCAPING DISTURBANCE IS TO BE COORDINATED WITH HOMEOWNERS BEFORE STARTING CONSTRUCTION. PROMPTLY REPAIR ANY DAMAGE TO IRRIGATION SYSTEMS, AND PROVIDE TEMPORARY IRRIGATION TO PLANTS, IF NECESSARY.

MAINTAIN AT LEAST 2.5FT FROM THE TRAFFIC COMM LINES

CONSTRUCTION NOTE:
1. ALL CONDUIT/CABLES/INNERDUCTS PLACED BY BORE UNLESS NOTED AS MICROTRENCH.
2. TYPICAL HANDHOLE PLACEMENT IS 3' FROM R/W AND 4' FROM EOP UNLESS NOTED.
3. ALL CONDUIT/ CABLES HAVE +5' TURN UP AND +5' TURN DOWN AT EACH HANDHOLE LOCATION

CAUTION: BEWARE OF WATER METER AND RESIDENTIAL FEEDER LINES. SEE DETAIL AND NOTES ON PAGE DT-5

SEE DWG PP-5

SEE DWG PP-4

END OF DESIGN

JUANITA LN NW

9TH ST NW

10TH CT NW

8TH CT NW

ALLEY

DOUGLAS MACARTHUR RD NW

TO CO DOP

F14B032 F14B033 F14B034 F14B035 F14B313 F14B314 F14B315 F14B316 F14B317 F14B318 F14B310 F14B311 F14B312

P-16 F14B885 R-25

PON308SRN, 239-246
EVOLV81000RAW
R 5315 10TH CT NW

PON308SRN, 231-234
EVOLV4300RAW
O 5324 9TH ST NW

PON308SRN, 271-282
EVOLV12400RAW
R 5322 10TH CT NW

PON308SRN, 259-270
EVOLV12300RAW
R 5321 8TH CT NW

PON308SRN, 287-312

PON308SRN, 307-312
EVOLV6500RAW
F 916 DOUGLAS MACARTHUR RD NW

PON308SRN, 303-306
EVOLV4300RAW
F 900 DOUGLAS MACARTHUR RD NW

PON308SRN, 297-302
EVOLV6200RAW
F 812 DOUGLAS MACARTHUR RD NW

PON308SRN, 293-296
EVOLV4500RAW
F 720 DOUGLAS MACARTHUR RD NW

OWNER: GIGAPOWER

CONTRACTOR: TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
PROJECT PLAN


SCALE:
1:70

REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

nm811 Know what's below. Call before you dig.

CURRENT SHEET:
PP-6

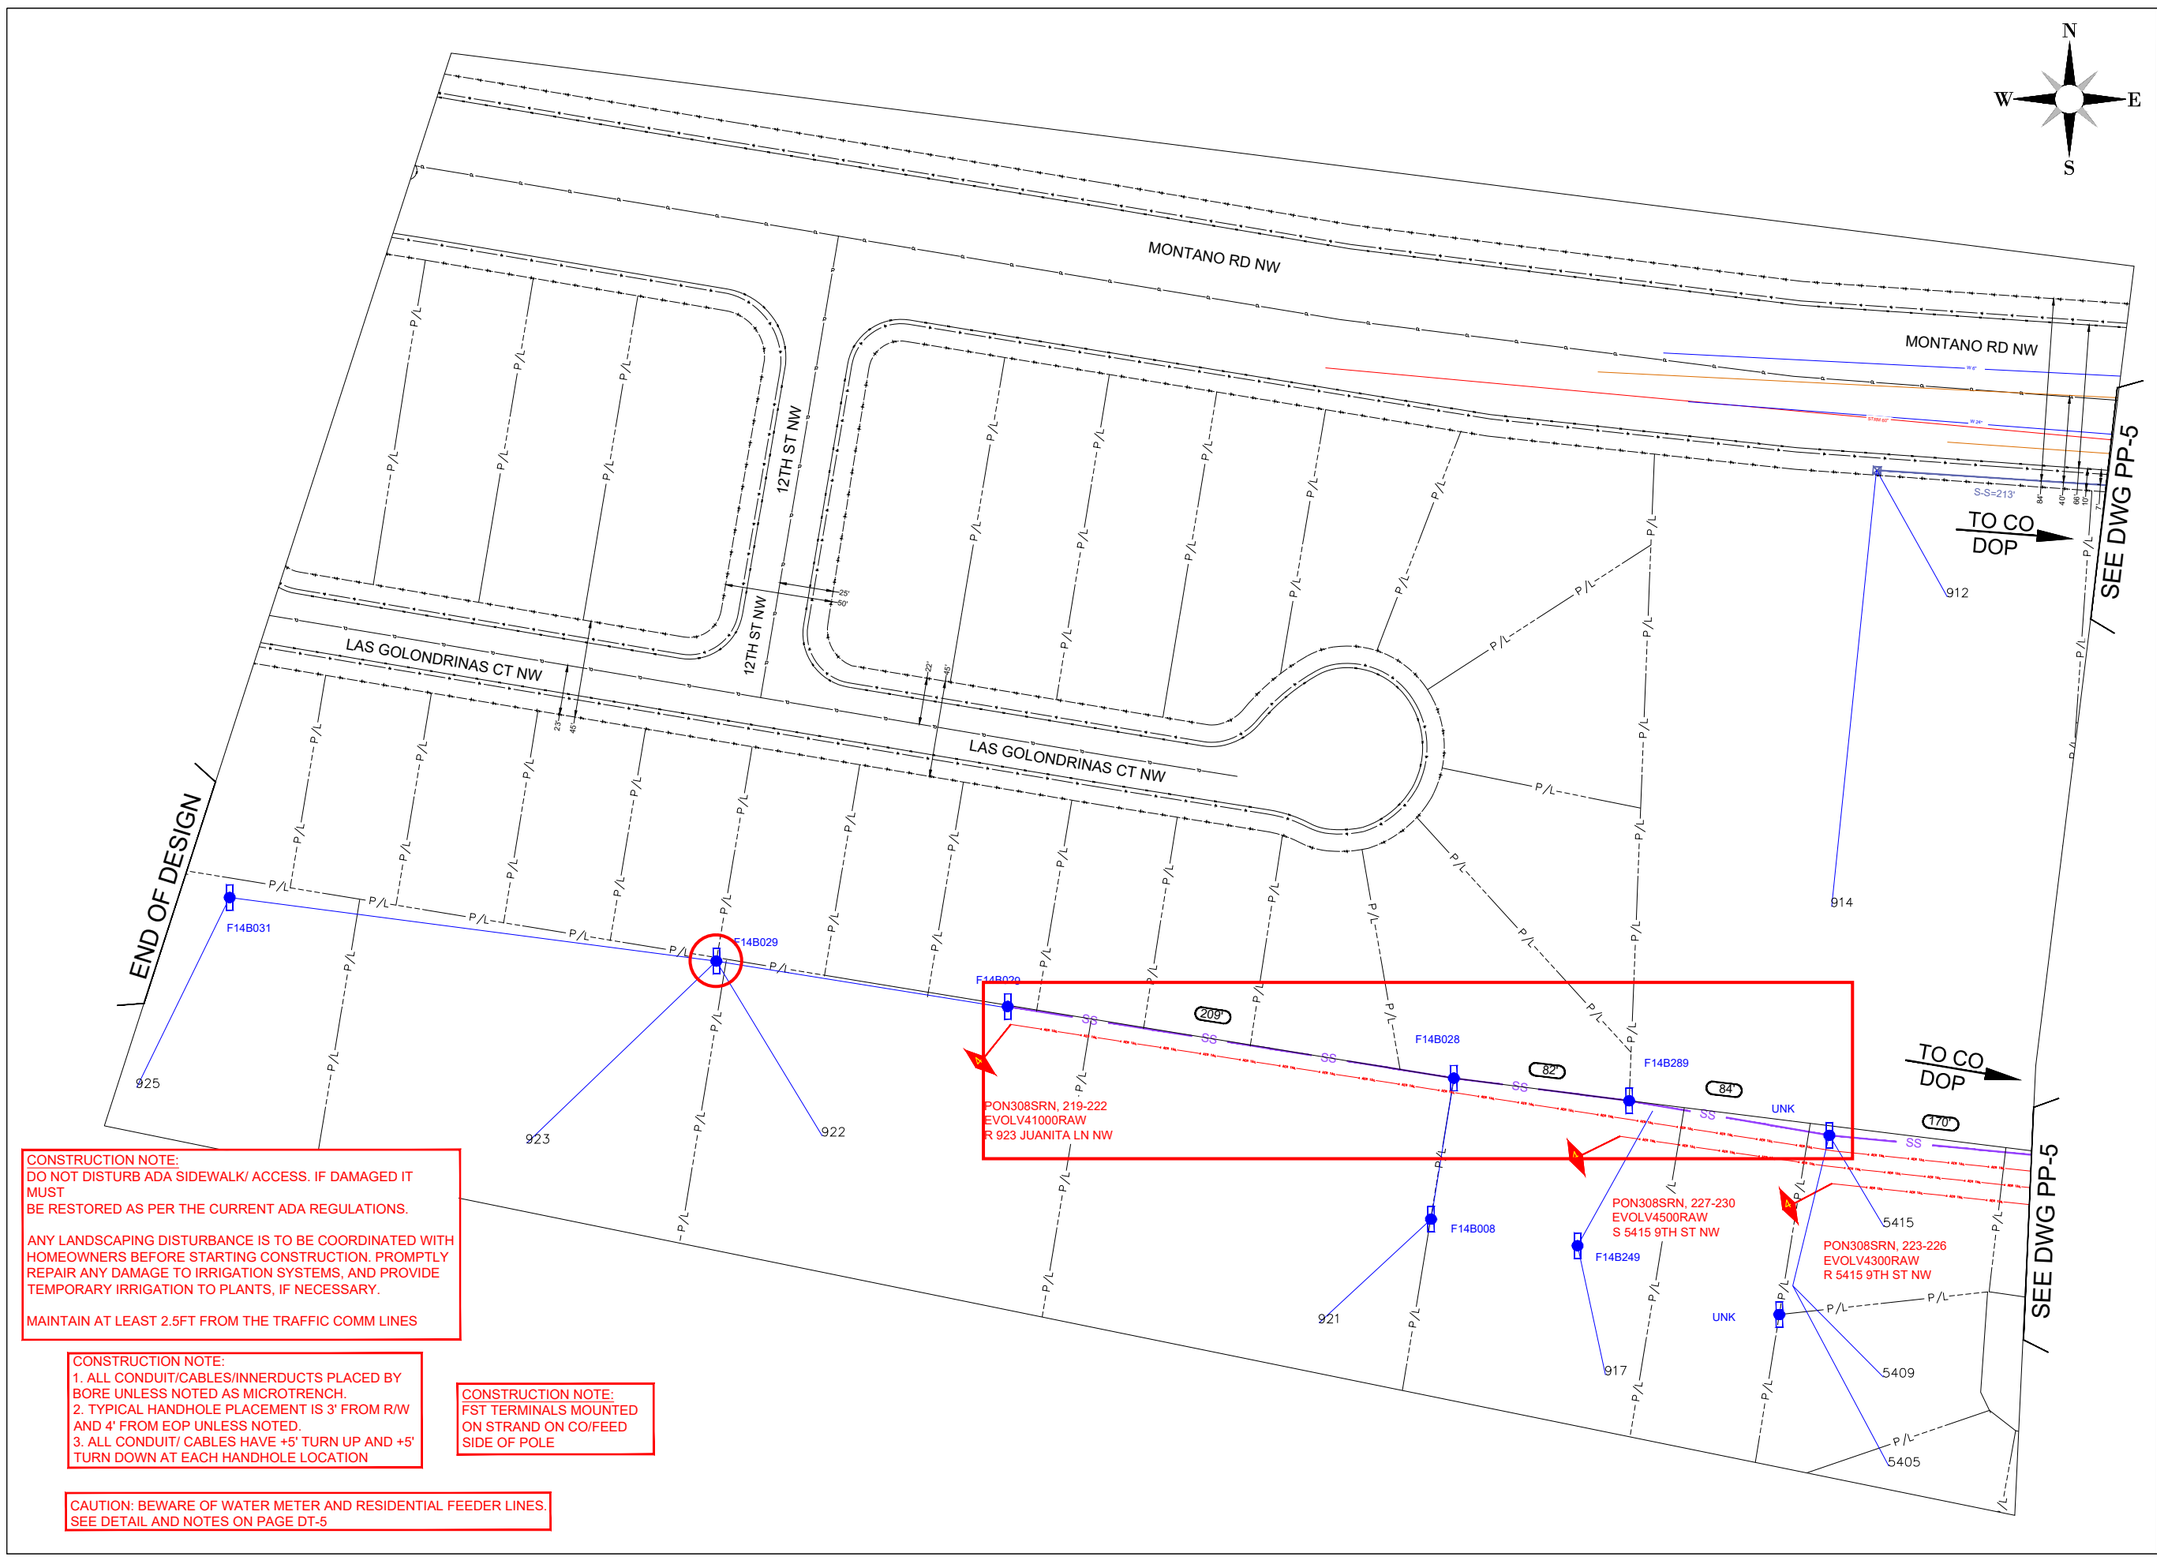

OWNER:

GIGAPOWER

CONTRACTOR:

TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
PROJECT PLAN

SCALE:
1:70

REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

nm811 Know what's below. Call before you dig.

CURRENT SHEET:
PP-7


CONSTRUCTION NOTE:
DO NOT DISTURB ADA SIDEWALK/ ACCESS. IF DAMAGED IT MUST
BE RESTORED AS PER THE CURRENT ADA REGULATIONS.

ANY LANDSCAPING DISTURBANCE IS TO BE COORDINATED WITH HOMEOWNERS BEFORE STARTING CONSTRUCTION. PROMPTLY REPAIR ANY DAMAGE TO IRRIGATION SYSTEMS, AND PROVIDE TEMPORARY IRRIGATION TO PLANTS, IF NECESSARY.

MAINTAIN AT LEAST 2.5FT FROM THE TRAFFIC COMM LINES

CONSTRUCTION NOTE:
1. ALL CONDUIT/CABLES/INNERDUCTS PLACED BY BORE UNLESS NOTED AS MICROTRENCH.
2. TYPICAL HANDHOLE PLACEMENT IS 3' FROM R/W AND 4' FROM EOP UNLESS NOTED.
3. ALL CONDUIT/ CABLES HAVE +5' TURN UP AND +5' TURN DOWN AT EACH HANDHOLE LOCATION

CAUTION: BEWARE OF WATER METER AND RESIDENTIAL FEEDER LINES.
SEE DETAIL AND NOTES ON PAGE DT-5

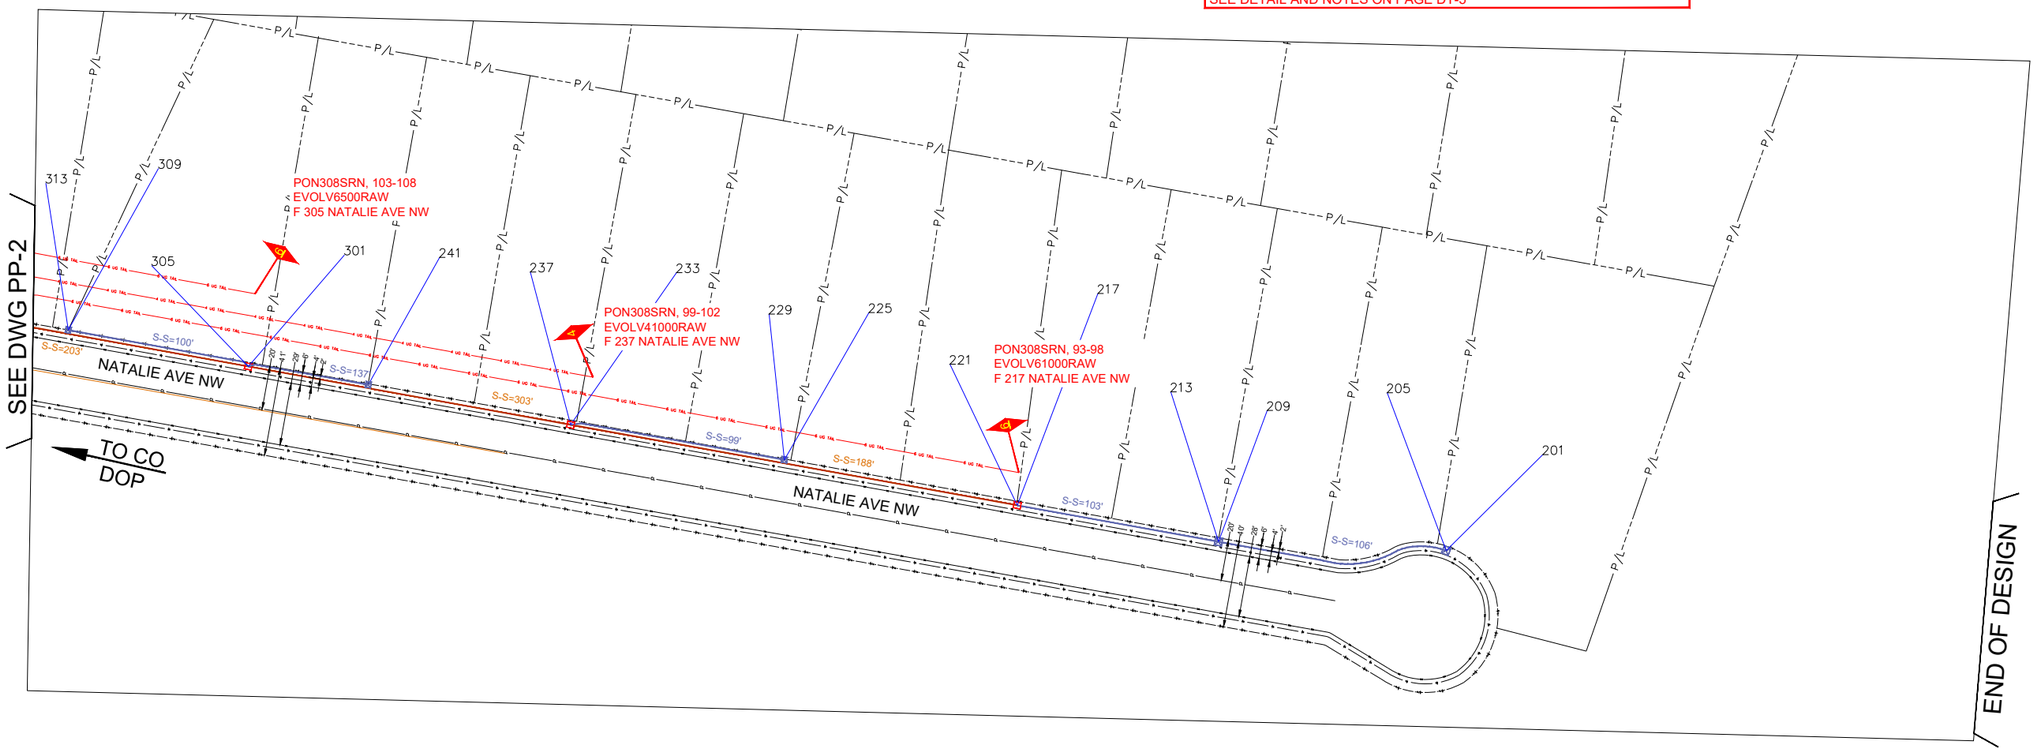

N
W E
S

OWNER:

GIGAPOWER

CONTRACTOR:

TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
PROJECT PLAN

SCALE:
1:70


REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

nm811 Know what's below. Call before you dig.


CURRENT SHEET:
PP-8

30" x 60" HANDHOLE ASSEMBLY

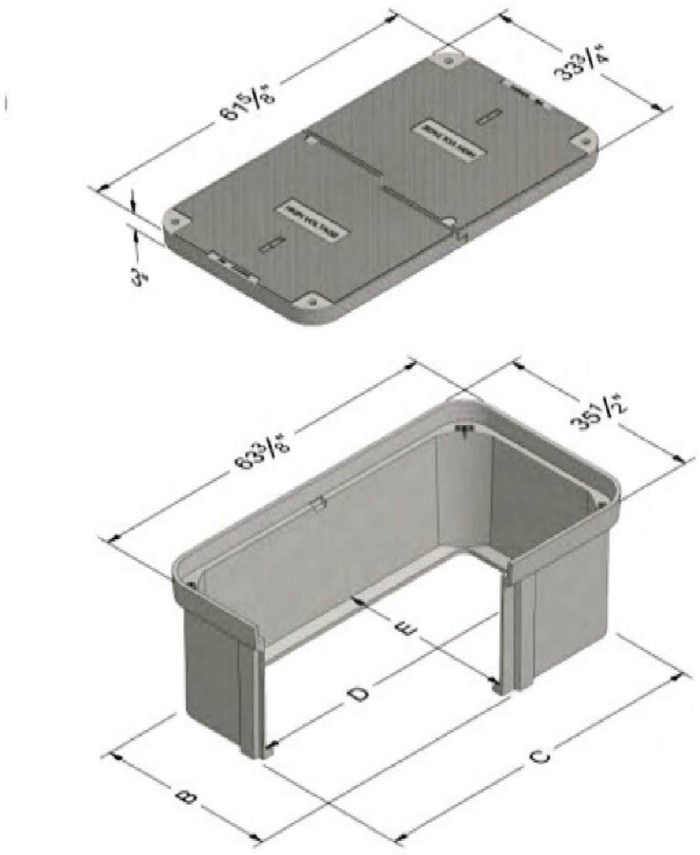


	A	B	C	D	E
3060-24	24	33-3/8	61-1/4	58-7/16	30-9/16
3060-30	30	33-1/4	61-1/8	58-5/16	30-7/16
3060-36	36	33-1/16	60-15/16	58-3/16	30-5/16

24" x 36" HANDHOLE ASSEMBLY

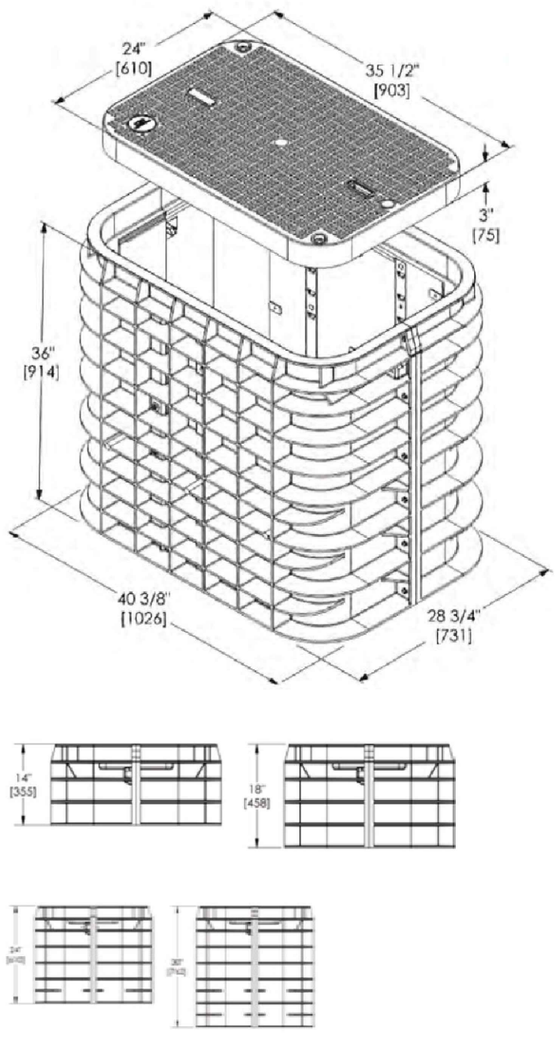


HANDHOLE GROUNDING DETAIL

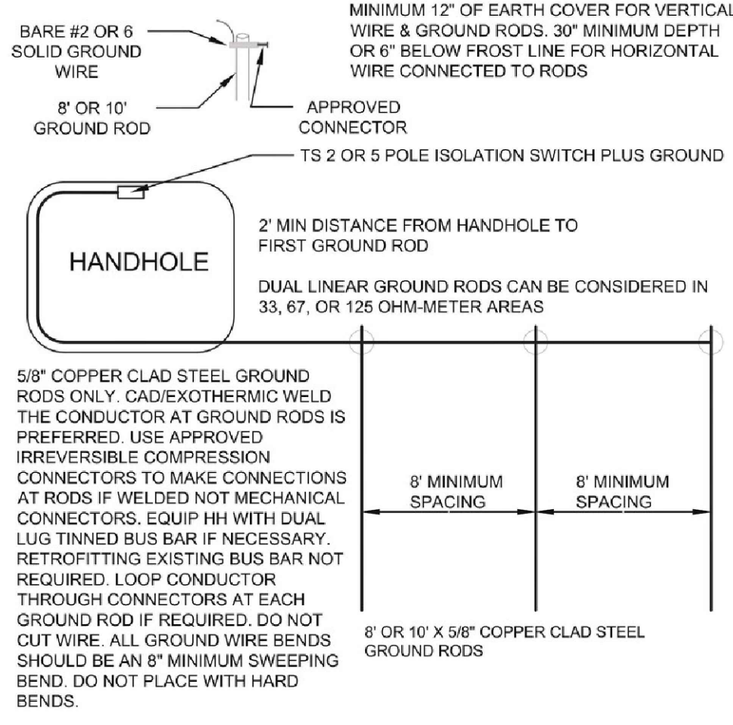


5/8" COPPER CLAD STEEL GROUND RODS ONLY. CAD/EXOTHERMIC WELD THE CONDUCTOR AT GROUND RODS IS PREFERRED. USE APPROVED IRREVERSIBLE COMPRESSION CONNECTORS TO MAKE CONNECTIONS AT RODS IF WELDED NOT MECHANICAL CONNECTORS. EQUIP HH WITH DUAL LUG TINNED BUS BAR IF NECESSARY. RETROFITTING EXISTING BUS BAR NOT REQUIRED. LOOP CONDUCTOR THROUGH CONNECTORS AT EACH GROUND ROD IF REQUIRED. DO NOT CUT WIRE. ALL GROUND WIRE BENDS SHOULD BE AN 8" MINIMUM SWEEPING BEND. DO NOT PLACE WITH HARD BENDS.

CONDUIT SWEEP DETAIL BORING PLACEMENT

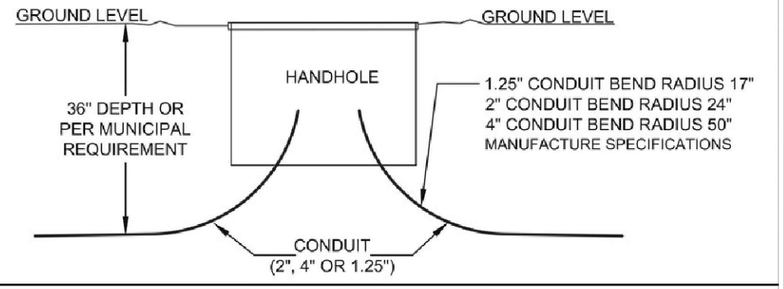

24" x 36" HANDHOLE ASSEMBLY

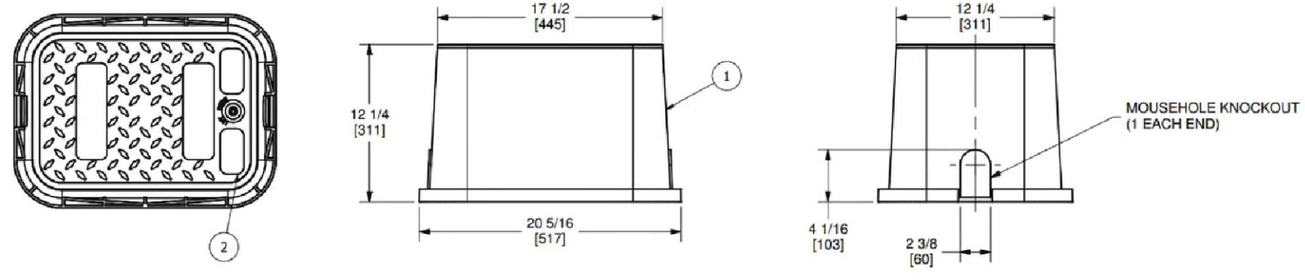

OWNER:

GIGAPOWER

CONTRACTOR:

TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
PROJECT DETAILS

SCALE:
N.T.S.


REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		


nm811 Know what's below. Call before you dig.

CURRENT SHEET:
DT-2


GREENBELT, SIDEWALK, & RIGHT OF WAY APPLICATIONS

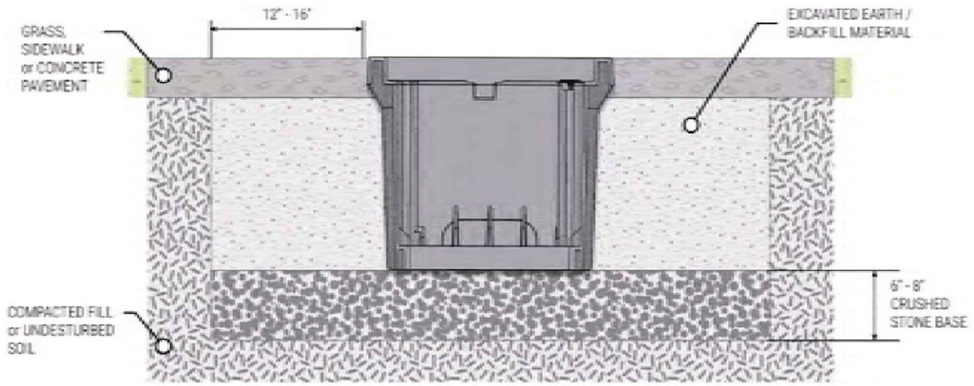

MICROTRENCHING DETAIL

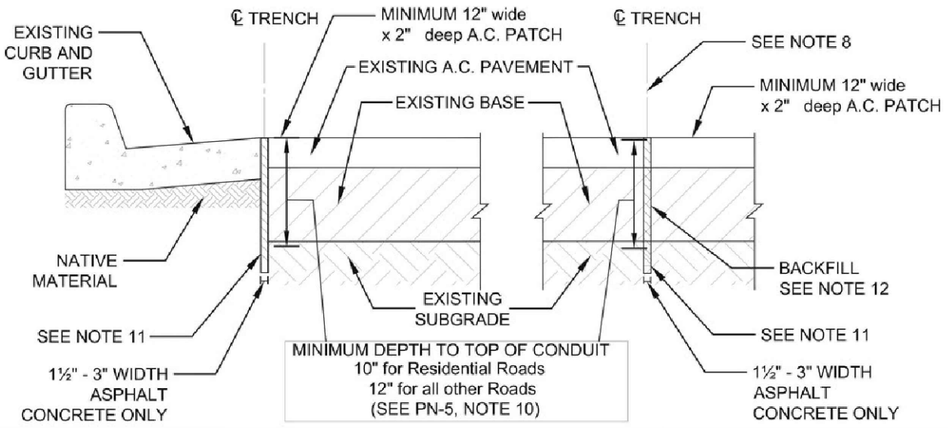


TEST HOLE TYPICAL DETAIL

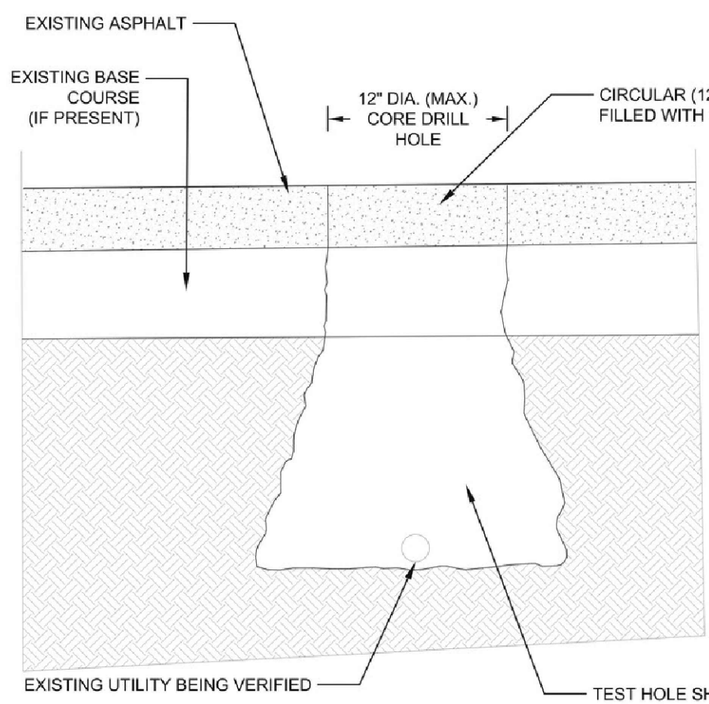


NOTE: IF LARGER TEST HOLE IS NECESSARY, RECTANGULAR CUT MAY BE USED (NO PARTIAL- DEPTH CUTS ALLOWED), PROVIDED THAT SP-IV HOT MIX ASPHALT (OR WARM PATCH) BE USED IN ACCORDANCE WITH COA SPECS.


TYPICAL MISSILE BORE FROM MICROTRENCH TO HANDHOLE

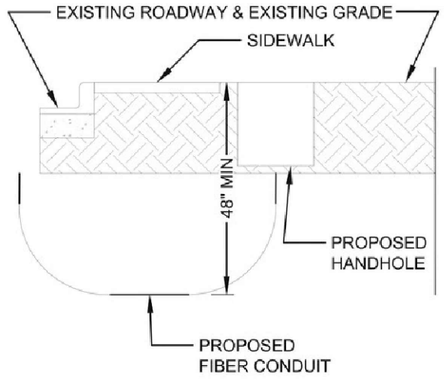

FLOWERPOT PLACEMENT TYPICAL DETAIL

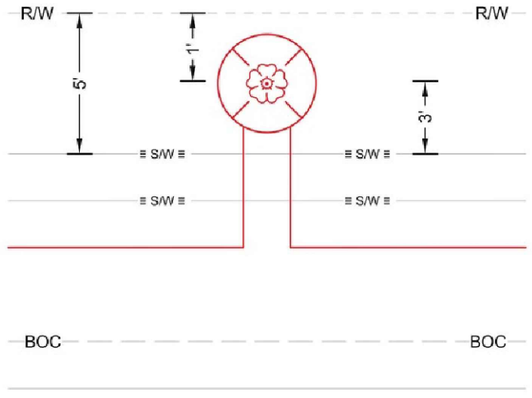

FLOWERPOT PLACEMENT TYPICAL DETAIL (ALLEY WAY)

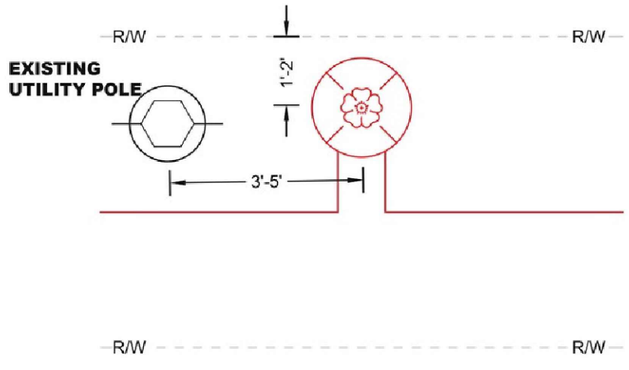

CONSTUCTION NOTE (ALLEY WAY):
PLACE ALL HHs/FPs 3'-5' FROM UTILITY POLE LOCATION OUT OF TRAFFIC PATH.

OWNER:

GIGAPOWER

CONTRACTOR:

TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
PROJECT DETAILS

SCALE:
N.T.S.


REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		


nm811 Know what's below. Call before you dig.

CURRENT SHEET:
DT-3


ROADWAY CROSSINGS, BORE, AND BORE WITH VAULTS DETAIL DRAWINGS

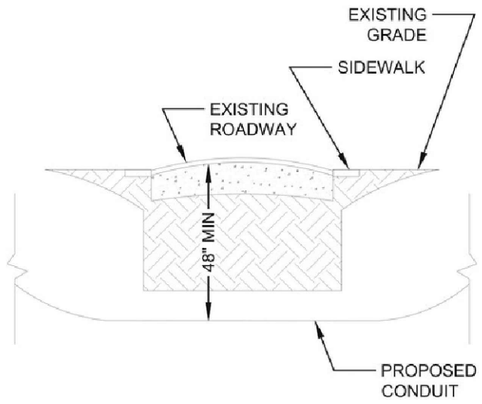


TYPICAL ROADWAY CROSSING | 1

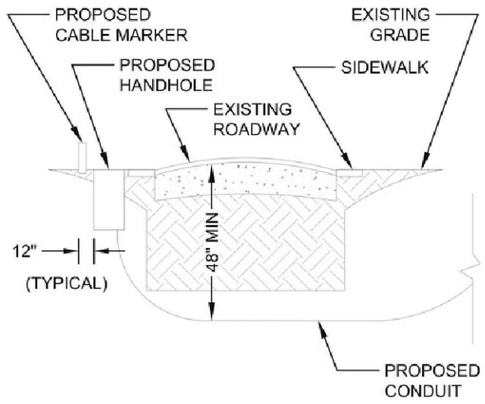


ROADWAY CROSSING WITH (1) VAULT | 2

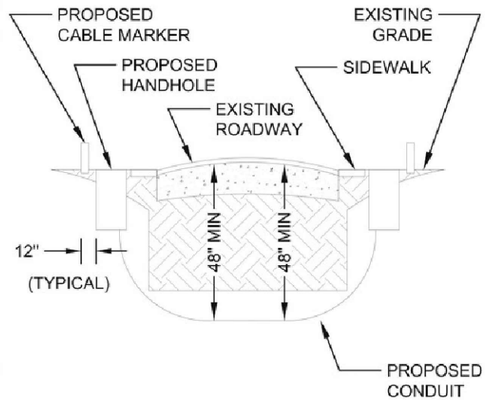


ROADWAY CROSSING WITH (2) VAULT | 3

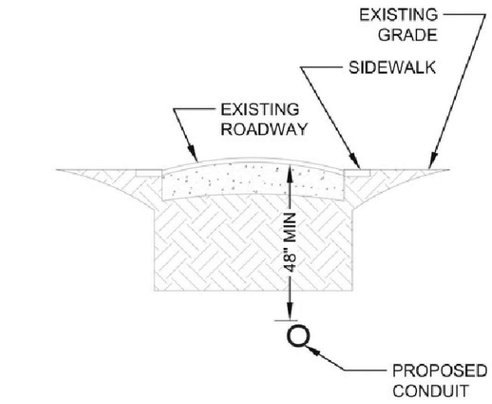


BORE UNDER ROADWAY | 4

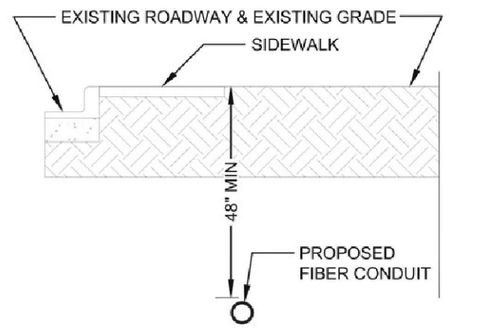


TYPICAL BORE SECTION | 5

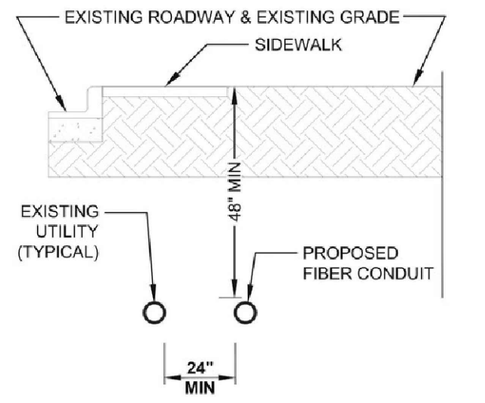


BORE SECTION WITH EXISTING UTILITY | 6

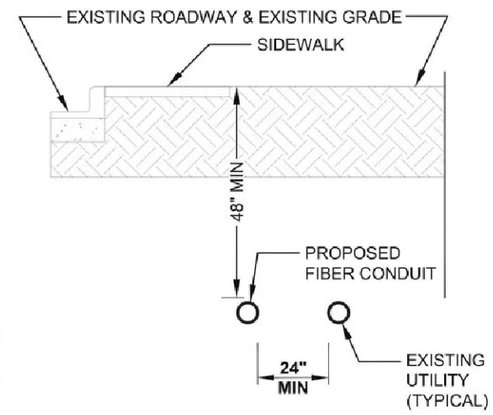


BORE SECTION WITH EXISTING UTILITY | 7

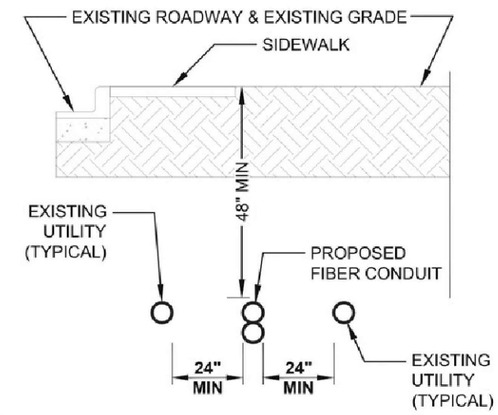


BORE SECTION WITH EXISTING UTILITIES | 8

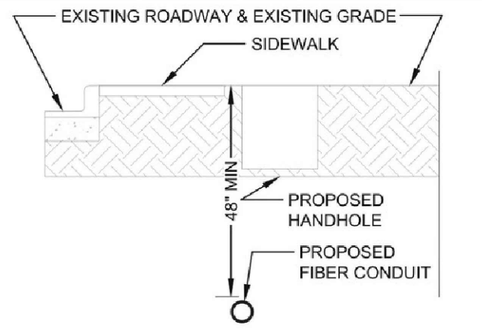


TYPICAL BORE & VAULT SECTION | 9

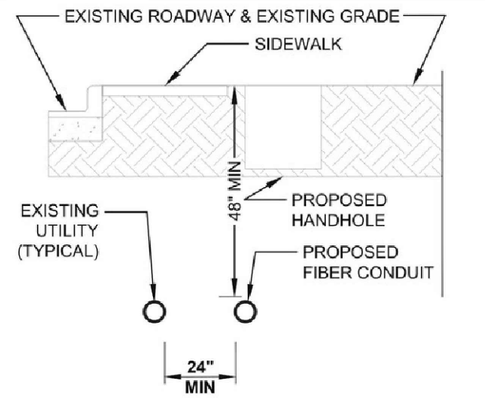

TYPICAL BORE & VAULT SECTION WITH EXISTING UTILITY | 10

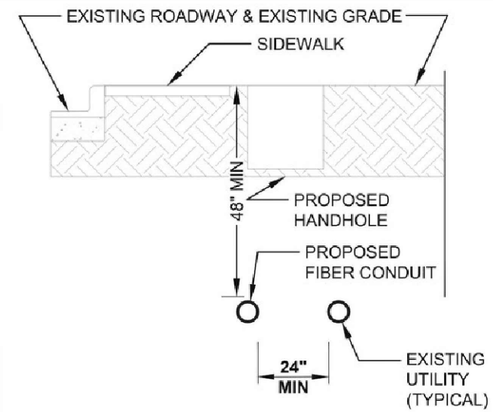

TYPICAL BORE & VAULT SECTION WITH EXISTING UTILITY | 11

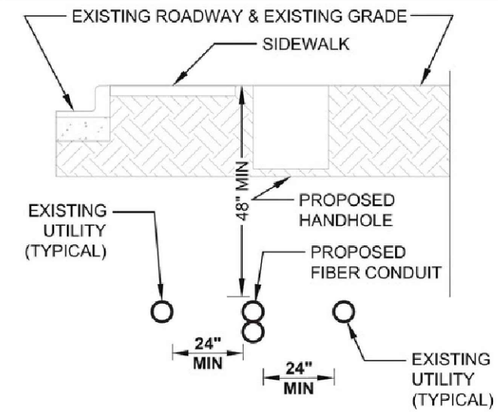

TYPICAL BORE & VAULT SECTION WITH EXISTING UTILITIES | 12

OWNER:

GIGAPOWER

CONTRACTOR:

TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
PROJECT DETAILS

SCALE:
N.T.S.

REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		


nm811 Know what's below. Call before you dig.

CURRENT SHEET:
DT-4


WATER AUTHORITY NOTES:

- "CONTRACTOR SHALL POTHOLE ALL LOCATIONS THAT THE FIBER OPTIC BORE WILL CROSS THE WATER SERVICE LINE. THE CONTRACTOR IS NOT PERMITTED TO TAMPER WITH, OPEN, OR POTHOLE WITHIN METER BOXES. ANY DAMAGE TO THE METER BOX OR THE CONCRETE SURROUNDING THE METER BOX WILL BE REPLACED AT THE CONTRACTOR'S EXPENSE INCLUDING BARRICADES. IF THE CONTRACTOR HAS DAMAGED A METER BOX, THE CONTRACTOR SHALL CONTACT THE WATER AUTHORITY AT 842-WAT OPTION 1 TO OBTAIN A REPLACEMENT."
- "CONTRACTOR SHALL NOT BORE BENEATH METER BOXES FOR NEW FIBER OPTIC OR SERVICE DROPS. CONTRACTOR SHALL PARALLEL METER BOXES AT ALL TIMES AND MAINTAIN A MINIMUM OF 18" OF VERTICAL SEPARATION FROM WATER SERVICE LINES."
- "CONTRACTOR SHALL MAINTAIN THE HORIZONTAL SEPARATION OF 24" REGARDLESS OF THE LOCATION OF THE PROPERTY LINE OR ROW LINE."

METER BOX DETAIL

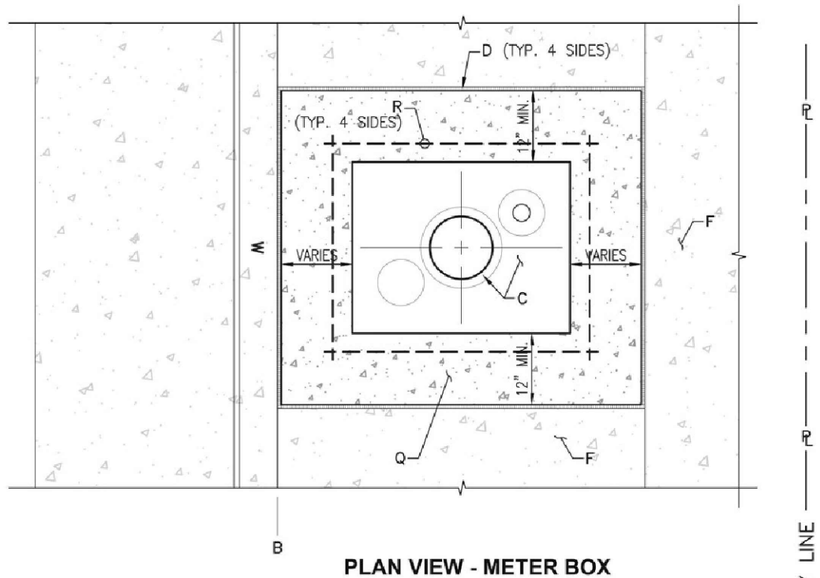

PLAN VIEW - METER BOX

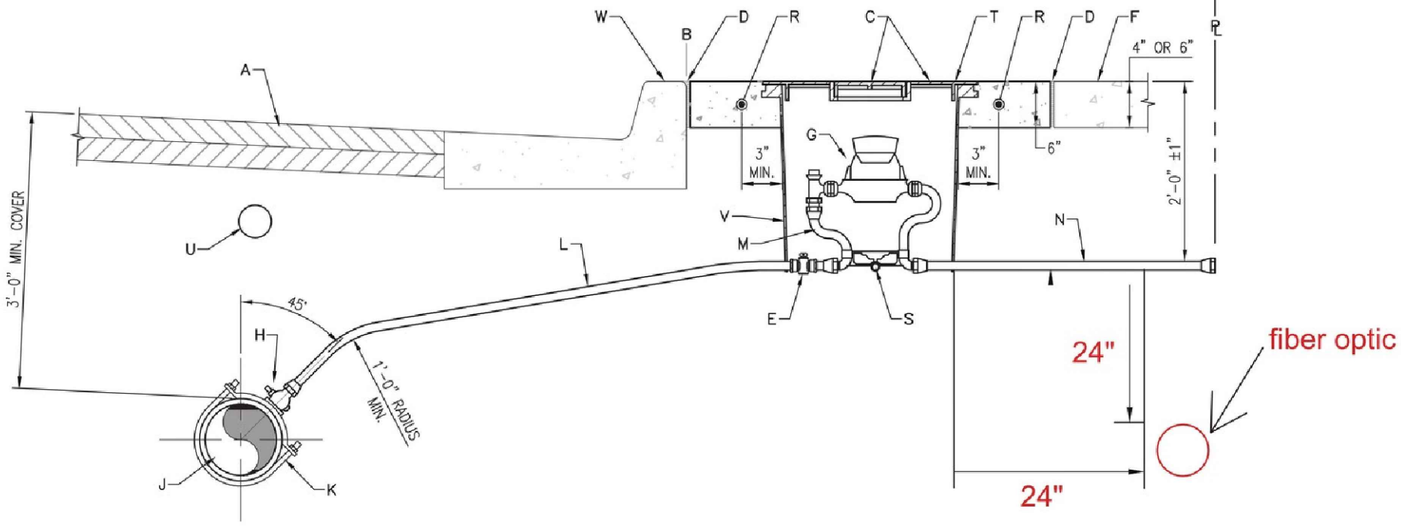

SECTION - METER BOX AND WATER LINE

ITEM DESCRIPTION

A. STREET SURFACE
B. BACK OF CURB
C. METER BOX COVER AND LID.
D. 1/2" EXPANSION JOINT
E. CURB STOP, LOCATE INSIDE METER BOX.
F. SIDEWALK OR DRIVEPAD
G. METER.
H. CORP STOP
J. MAIN WATER LINE
K. TAPPING SADDLE
L. COPPER SERVICE LINE
M. COPPER SETTER.
N. TAILPIECE. 3 FT LONG.
Q. CONCRETE PAD
R. #4 REBAR
S. STABILIZER BAR.
T. METER BOX LID
U. ELECTRONIC MARKER DEVICE (EMD).
V. METER BOX PER STANDARD DRAWING 2366.
W. "W" STAMP ON CURB WHERE SERVICE LINE CROSSES.

OWNER:

GIGAPOWER

CONTRACTOR:

TECH SERV

CPN # ----

PROJECT NAME:
PSA-3030PA-ALBQNMMA-VICTOR

OLT LOCATION:
ABQ-003

FDA:
3030PA

SHEET TITLE:
PROJECT DETAILS

SCALE:
N.T.S.

REVISIONS

#	Date	Comments
1	07/29/26	CREATED
2		
3		
4		
5		

nm811 Know what's below. Call before you dig.

CURRENT SHEET:
DT-5